

## KVR100X72C3/512 512MB PC100 CL3 168-Pin ECC SDRAM DIMM Module

### DESCRIPTION:

This document describes ValueRAM's 64M x 72-bit (512MB), CAS Latency 3 (CL3) SDRAM (Synchronous DRAM) 100MHz ECC memory module. The components on this module include eighteen 32M x 8-bit (8M x 8-Bit x 4 bank) PC100 CL3 SDRAM components in TSOP packages. This 168-pin DIMM uses gold contact fingers and requires +3.3V. The electrical and mechanical specifications are as follows:

### FEATURES:

<input checked="" type="checkbox"/> CLK Cycle Time (tCC)	min. = 10ns (CAS Latency = 3) / max. = 1000ns
<input checked="" type="checkbox"/> Row Cycle Time (tRC)	70ns
<input checked="" type="checkbox"/> CLK to Output (tSAC)	max. = 6ns (CAS Latency = 3)
<input checked="" type="checkbox"/> Single Power Supply of	+3.3V (+/- .3V)
<input checked="" type="checkbox"/> Power	4.728 W (operating)
<input checked="" type="checkbox"/> UL Rating	94 V - 0

**Note:** The module defined in this data sheet is one of several configurations available under this part number. While all configurations are compatible, the DRAM combination and/or the module height may vary from what is described here. However, in no configuration will the module height exceed 1.375" (34.92mm).

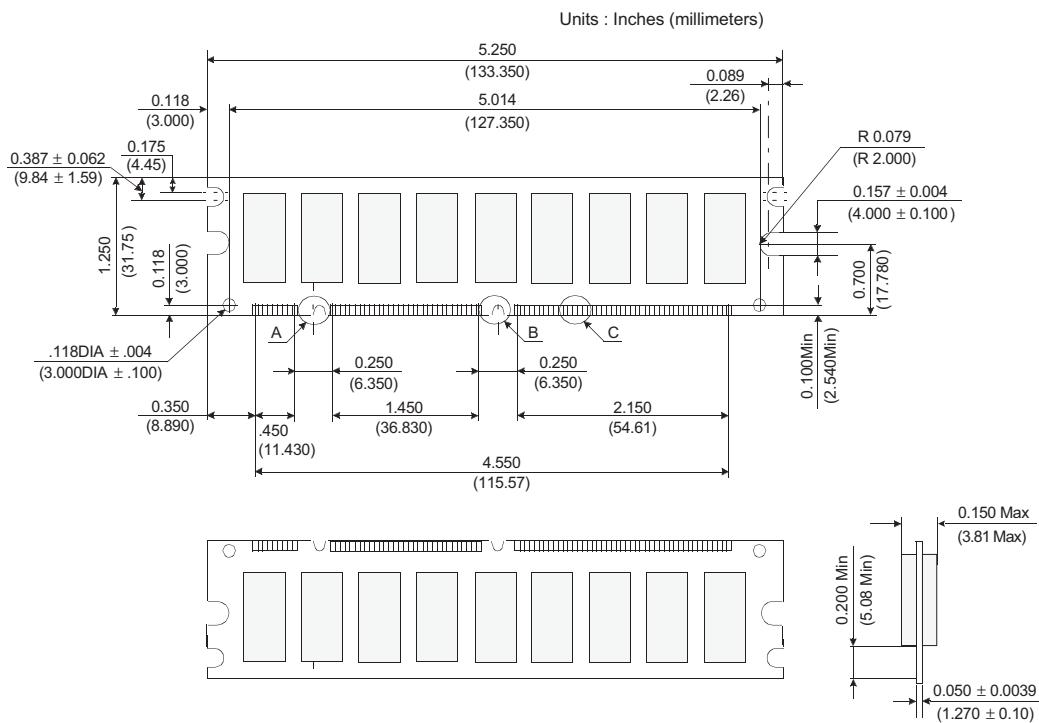


Figure 1: KVR100X72C3/512 168-Pin SDRAM Module