



Thunderbolt 4/USB4 Dock, Quad Display, 7x USB, 2.5GbE, 98W Power Delivery


Product ID 132N-TB4USB4DOCK / 132UE-TB4USB4DOCK Product Diagram (Side A)

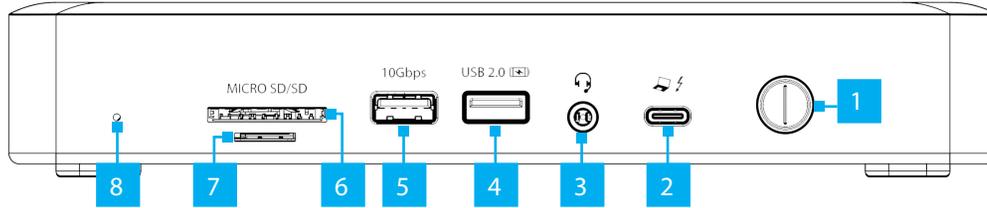

(Side B)

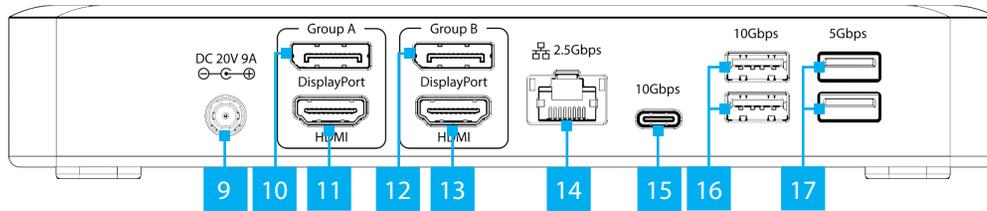

(Side C)

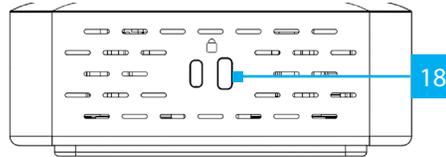

Component	Function
1 Power Button	<ul style="list-style-type: none"> Press and Release to Toggle Power for the Dock
2 Thunderbolt 4 Host Port (USB Type-C)	<ul style="list-style-type: none"> Connect to a Thunderbolt 4 Port on a Host Computer Thunderbolt 3/USB4 (40 Gbps) Power Delivery 3.0 Specification Capability of charging the Host Computer up to 98W
3 3.5mm Headset Jack	<ul style="list-style-type: none"> Connect a 3.5mm Audio Device 4-Position CTIA Mono Audio Input Stereo Audio Output
4 USB-A Data/Charge Port	<ul style="list-style-type: none"> Connect and/or Charge a USB-A Peripheral USB 2.0 (480Mbps) Supports 7.5W BC 1.2 Charging (5V/1.5A)
5 USB-A Data Port	<ul style="list-style-type: none"> Connect a USB-A Peripheral USB 3.2 Gen 2 (10 Gbps) Supports 4.5W of Power (5V/0.9A)

6 SD Card Reader	<ul style="list-style-type: none"> Secure Digital (SD) 4.0 UHS-II, SD 3.0, 2.0, 1.1, and 1.0 compatibility Push an SD Card, label side up, into the SD Card Slot Note: The Host Computer's Operating System (OS) will automatically detect the SD Card and install the required driver software
7 MicroSD Card Reader	<ul style="list-style-type: none"> Micro Secure Digital (microSD) 4.0 UHS-II, microSD 3.0, 2.0, 1.1, and 1.0 compatibility Push a microSD Card, label side down, into the microSD Card Slot Note: The Host Computer's Operating System (OS) will automatically detect the SD Card and install the required driver software
8 Status LED	<ul style="list-style-type: none"> Illuminates Green, When the Dock is Connected to a Host Computer Illuminates White, When the Dock is Not Connected to a Host Computer Does Not Illuminate, When the Dock is Turned Off
9 DC 20V Port	<ul style="list-style-type: none"> Connect the Dock to a Power Source, using the Universal Power Adapter
10 DisplayPort Port (Group A)	<ul style="list-style-type: none"> Connect a DisplayPort Display as Video Output #1 DisplayPort 1.4 Resolutions up to 7680 x 4320 60Hz
11 HDMI Port (Group A)	<ul style="list-style-type: none"> Connect an HDMI Display as Video Output #2 HDMI 2.1 Resolutions up to 7680 x 4320 60Hz
12 DisplayPort Port (Group B)	<ul style="list-style-type: none"> Connect a DisplayPort Display as Video Output #3 DisplayPort 1.4 Resolutions up to 7680 x 4320 60Hz
13 HDMI Port (Group B)	<ul style="list-style-type: none"> Connect an HDMI Display as Video Output #4 HDMI 2.1 Resolutions up to 7680 x 4320 60Hz
14 2.5 Gigabit Ethernet Port	<ul style="list-style-type: none"> Connect the Dock to a Network Device, using a Network Cable 2.5GBASE-T / 1000BASE-T / 100BASE-T / 10BASE-T 2.5Gbps/1000Mbps/100Mbps/10Mbps
15 USB-C Data Port	<ul style="list-style-type: none"> Connect a USB-C Peripheral USB 3.2 Gen 2 (10 Gbps) Supports 4.5W of Power (5V/0.9A)
16 2x USB-A Data Ports	<ul style="list-style-type: none"> Connect USB-A Peripherals USB 3.2 Gen 2 (10 Gbps) Supports 4.5W of Power (5V/0.9A)
17 2x USB-A Data Ports	<ul style="list-style-type: none"> Connect USB-A Peripherals USB 3.2 Gen 1 (5 Gbps) Supports 4.5W of Power (5V/0.9A)
18 2x Lock Slots (Standard & Nano)	<ul style="list-style-type: none"> Connect a K-Slot Style Locking Device to deter the theft of the Docking Station

Package Contents

- Thunderbolt 4/USB4 Docking Station x 1
- 3ft (1m) Thunderbolt 4 Host Cable x 1
- Universal Power Adapter x 1
- Quick-Start Guide x 1

Requirements

- Computer
 - Thunderbolt 4
 - Thunderbolt 3 (Intel or M1 based Mac's)
 - USB-C Port With DP Alt Mode
- This Dock can function with Thunderbolt 4, USB4 or USB-C host ports. For maximum performance a Thunderbolt 4 or USB4 port is recommended.
- Video support and performance, such as resolution and refresh rate, depend on the host computer and the performance of the video card or USB4 port.

Notes:

- DisplayPort Video Output ports do not support the use of passive DisplayPort Adapters.

For the latest drivers, manuals, product information, technical specifications, and declarations of conformance, please visit: www.StarTech.com/132N-TB4USB4DOCK or www.StarTech.com/132UE-TB4USB4DOCK

Installation

1. Connect the **Power Adapter** from an AC outlet, to the **DC 20V Port** on the dock.
2. When connecting USB-A peripheral devices, connect a USB-A cable from the USB peripheral devices to the **USB-A Data Ports** and/or the **USB-A Data/Charge Port** on the Dock.

Regulatory Compliance

FCC - Part 15

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Changes or modifications not expressly approved by StarTech.com could void the user's authority to operate the equipment.

Industry Canada Statement

This Class B digital apparatus complies with Canadian ICES-003.

Cet appareil numérique de la classe [B] est conforme à la norme NMB-003 du Canada.

CAN ICES-3 (B)/NMB-3(B)

This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions:

(1) This device may not cause interference, and (2) This device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

(1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

3. When connecting USB-C peripheral devices, connect a USB-C cable from the USB peripheral devices to the **USB-C Data Port** on the Dock.
4. When connecting a wired network, connect an RJ-45 terminated network cable (CAT 5e or better) from the local area network (e.g. Router, Switch, Modem, etc.) to the **2.5 Gigabit Ethernet Port** on the Dock (CAT 6 or better recommended for 2.5Gb speeds).
5. Connect a DisplayPort monitor to the **DisplayPort Port (Group A)** on the dock using a DisplayPort cable (sold separately).
6. Connect an HDMI monitor to the **HDMI Port (Group A)** on the dock using an HDMI cable (sold separately).
7. Connect a DisplayPort monitor to the **DisplayPort Port (Group B)** on the dock using a DisplayPort cable (sold separately).
8. Connect an HDMI monitor to the **HDMI Port (Group B)** on the dock using an HDMI cable (sold separately).
9. Connect the included **Thunderbolt 4 Host Cable** from a **Thunderbolt 4 Port** on the **Host Computer**, to the **Thunderbolt 4 Host Port** on the Dock. The **Host Computer** will automatically detect and install the Dock.
10. Insert a memory card into the **microSD Card Reader** on the Dock. The Dock will recognize the card and mount it as a drive. To remove the memory card, push the card in and then pull the memory card out.
11. Insert a memory card into the **SD Card Reader** on the Dock. The Host Computer will recognize the card and mount it as a drive. To remove the memory card, pull the memory card out.

Note: To protect the memory card and the data stored on it, it's important to safely unmount (eject) the card within the Host Computer operating system, before physically removing the card from the Dock.

Warranty Information

This product is backed by a three-year warranty.

For further information on product warranty terms and conditions, please refer to www.startech.com/warranty.

Limitation of Liability

In no event shall the liability of StarTech.com Ltd. and StarTech.com USA LLP (or their officers, directors, employees or agents) for any damages (whether direct or indirect, special, punitive, incidental, consequential, or otherwise), loss of profits, loss of business, or any pecuniary loss, arising out of or related to the use of the product exceed the actual price paid for the product. Some states do not allow the exclusion or limitation of incidental or consequential damages. If such laws apply, the limitations or exclusions contained in this statement may not apply to you.



StarTech.com Ltd.
45 Artisans Cres
London, Ontario
N5V 5E9
Canada

StarTech.com LLP
4490 South Hamilton
Road
Groveport, Ohio
43125
U.S.A.

StarTech.com Ltd.
Unit B, Pinnacle 15
Gowerton Rd,
Brackmills
Northampton
NN4 7BW
United Kingdom

StarTech.com Ltd.
Siriusdreef 17-27
2132 WT Hoofddorp
The Netherlands

FR: startech.com/fr
DE: startech.com/de
ES: startech.com/es
NL: startech.com/nl
IT: startech.com/it
JP: startech.com/jp