


## Dual-Bay M.2 NVMe SSD Backplane for PCIe x8 Slot with Bifurcation

### Product ID

2M2-REMOVABLE-PCIE

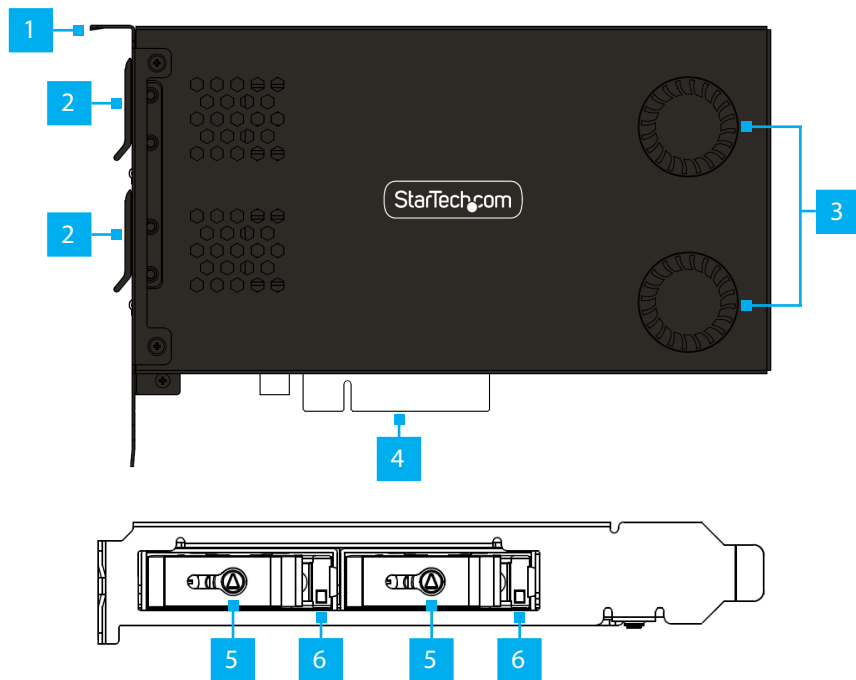

### Product Information

For the latest drivers/software, technical specifications, and declarations of conformance, please visit: [www.StarTech.com/2M2-REMOVABLE-PCIE](http://www.StarTech.com/2M2-REMOVABLE-PCIE)

### Package Contents

- Dual-Bay M.2 NVMe SSD Backplane x 1
- Removable M.2 Drive Tray x 2
- M.2 Drive Mounting Screw x 2
- Set of Keys x 1
- Quick-Start Guide x 1

### Requirements

- Computer x 1
  - PCIe x8 or x16 Slot with Bifurcation support
- PCI Express M.2 SSD x 2
- Phillips Head Screwdriver x 1

### Installation

**Warning:** PCIe Cards can be damaged by static electricity. Ensure that the Installer is properly grounded before they open the Computer Case or touch the M.2 NVMe SSD Backplane. The Installer should wear an Anti-Static Strap when installing any computer component. If an Anti-Static Strap is not available, discharge any built-up static electricity by touching a large Grounded Metal Surface for several seconds. Only handle the M.2 NVMe SSD Backplane by its edges and do not touch the gold connectors.

**Note:** Consult the documentation that came with the Computer/Motherboard for details regarding how to enable and configure PCIe Bifurcation.

### Install the M.2 Storage Drives

1. Remove the Drive Tray from the M.2 NVMe SSD Backplane
2. Remove the Heat Sink Cover from the Removable Drive Tray by pressing the two Plastic Heat Sink Latching Locks, located near the back of the tray, towards each other.
3. Place the Drive next to the Drive Tray and note the Adjustable Standoff Holes that match the length of the Drive.
4. Remove the Adjustable Standoff by pressing the side of the Adjustable Standoff and sliding it towards the front of the tray.
5. Install the Standoff in the Adjustable Standoff Holes that matches the length of the Drive.
6. Insert the Drive into the Removable Drive Tray's M.2 Connector
  - Note:** The M.2 Connector on the Drive is M-Keyed so that it only fits M-Keyed NVMe M.2 Storage Devices
7. Gently slide the M.2 Drive Connector into the M.2 Connector of the Drive Tray, and press the Drive down toward the adapter until the Drive is properly seated.

Component	Function
1 Full-Profile Bracket	• Secure the M.2 NVMe SSD Backplane to the Computer Case
2 M.2 Drive Trays	• Hosts the M.2 Drives for the M.2 NVMe SSD Backplane
3 Active Cooling Fans	• Vents air away from the M.2 NVMe Drives
4 PCIe x8 Connector	• Connect the M.2 NVMe SSD Backplane to a PCIe Slot in the Computer
5 Key Lock for Drive Tray	• Use the included Key to Lock or Unlock the M.2 Drive Trays from the M.2 NVMe SSD Backplane
6 Drive LED Indicator	• <b>Red:</b> Connected Drive is Not Supported • <b>Green:</b> Connected Drive is Supported • <b>Yellow:</b> Flashes to indicate Drive Activity

8. (Optional) Install the **Drive Mounting Screw** to secure the **Drive** in place.
9. Replace the **Heat Sink Cover**.
10. Repeat **Steps 1 - 9** for the second **M.2 NVMe Drive**.

## Install the M.2 NVMe SSD Backplane

1. Turn off the **Computer** and disconnect the **Power Cable** and any **Peripheral Devices** that are connected (e.g. printers, external hard drives, etc.).
2. Remove the **Cover** from the **Computer Case**.  
**Note:** Consult the documentation that came with the Computer for details about how to do this safely.
3. Locate an open **PCIe x8 or x16 Slot** that supports PCIe Bifurcation and remove the corresponding **Metal Cover Plate** from the rear of the **Computer Case**. In most instances, the **Metal Cover Plate** is attached to the rear of the **Computer Case** with a single **Phillips Head Screw**. Save this **Phillips Head Screw** for the next step.
4. Gently insert the **M.2 NVMe SSD Backplane** into the open **PCIe x8 or x16 Slot** and fasten the **Bracket** to the rear of the **Computer Case**, using the **Phillips Head Screw** from **Step 4**.
5. Replace the **Cover** from the **Computer** that was removed in **Step 2**.

## Install the Drive Trays

**Note:** Hot swapping the drives while the computer is turned on is dependent on the Computer/Motherboard. Please consult with the manufacturer regarding PCIe Hot Swap support.

1. Ensure the **Drive Tray Lock** is in the **Unlocked** position.
2. Align the **Drive Tray** with the **Drive Tray Bay** located on the **M.2 NVMe SSD Backplane** at the rear of the **Computer**.
3. Gently insert the **Drive Tray** until it is fully inserted.  
**Note:** Make sure the drive tray is fully inserted before closing the latch. If inserted properly, the drive tray will be flush with the PCIe bracket. If the drive tray is inserted incorrectly, the drive tray will protrude from the PCIe bracket and the drive tray will not make full contact in the drive bay.
4. Use one of the included **Keys** to **Lock** the **Drive Tray** in place.
5. Repeat **Steps 1 - 4** for the second **M.2 NVMe Drive**.
6. Reconnect the **Power Cable** to the rear of the **Computer**.
7. Power on the **Computer** and all connected **Peripheral Devices**.

## Regulatory Compliance

### FCC - Part 15

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Changes or modifications not expressly approved by StarTech.com could void the user's authority to operate the equipment.

### Industry Canada Statement

This Class B digital apparatus complies with Canadian ICES-003.

Cet appareil numérique de la classe [B] est conforme à la norme NMB-003 du Canada.

CAN ICES-3 (B)/NMB-3(B)

This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions:

- (1) This device may not cause interference, and (2) This device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

- (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

### Warranty Information

This product is backed by a two-year warranty.

For further information on product warranty terms and conditions, please refer to [www.startech.com/warranty](http://www.startech.com/warranty).

### Limitation of Liability

In no event shall the liability of StarTech.com Ltd. and StarTech.com USA LLP (or their officers, directors, employees or agents) for any damages (whether direct or indirect, special, punitive, incidental, consequential, or otherwise), loss of profits, loss of business, or any pecuniary loss, arising out of or related to the use of the product exceed the actual price paid for the product. Some states do not allow the exclusion or limitation of incidental or consequential damages. If such laws apply, the limitations or exclusions contained in this statement may not apply to you.

### Use of Trademarks, Registered Trademarks, and other Protected Names and Symbols

This manual may make reference to trademarks, registered trademarks, and other protected names and/or symbols of third-party companies not related in any way to StarTech.com. Where they occur these references are for illustrative purposes only and do not represent an endorsement of a product or service by StarTech.com, or an endorsement of the product(s) to which this manual applies by the third-party company in question. StarTech.com hereby acknowledges that all trademarks, registered trademarks, service marks, and other protected names and/or symbols contained in this manual and related documents are the property of their respective holders.

PHILLIPS® is a registered trademark of Phillips Screw Company in the United States or other countries.



**StarTech.com Ltd.**  
45 Artisans Cres  
London, Ontario  
N5V 5E9  
Canada

**StarTech.com LLP**  
4490 South Hamilton  
Road  
Groveport, Ohio  
43125  
U.S.A.

**StarTech.com Ltd.**  
Unit B, Pinnacle 15  
Gowerton Rd,  
Brackmills  
Northampton  
NN4 7BW  
United Kingdom

**StarTech.com Ltd.**  
Siriusdreef 17-27  
2132 WT Hoofddorp  
The Netherlands

FR: [startech.com/fr](http://startech.com/fr)  
DE: [startech.com/de](http://startech.com/de)  
ES: [startech.com/es](http://startech.com/es)  
NL: [startech.com/nl](http://startech.com/nl)  
IT: [startech.com/it](http://startech.com/it)  
JP: [startech.com/jp](http://startech.com/jp)