

Technical Datasheet

DAC-QSFP28-100G-2.5M-AT

Universally Coded MSA 100Gb/s QSFP28 Direct Attach Cable Copper, Passive, 2.5m

FEATURES

- Compatible with IEEE 802.3bj and InfiniBand EDR
- In accordance with the paging function in the protocol SFF-8636, paging can be selected 00H or 02H in 127 bytes
- Supports aggregate data rates of 100Gb/s
- Optimised construction to minimize insertion loss and cross talk
- Backward compatible with existing QSFP+ connectors and cages
- Pull-to-release slide latch design
- 26AWG through 30AWG cable
- Straight and break out assembly configurations
- Customised cable braid termination limits EMI radiation
- Customisable EEPROM mapping for cable signature
- RoHS compliant

APPLICATIONS

- Switches, servers, and routers
- Data Centre networks

STORAGE AREA NETWORKS

- High performance computing
- Telecommunication and wireless infrastructure
- Medical diagnostics and networking
- Test and measurement equipment

INDUSTRIAL STANDARDS

- InfiniBand Trade Association (IBTA)
- IEEE 802.3, SFF-8665, and QSFP28 MSA

Technical Datasheet

DESCRIPTION

ATGBICS® Universally Coded MSA QSFP28 passive copper cable assembly feature eight differential copper pairs, providing four data transmission channels at speeds up to 28Gbps per channel, and meets 100G Ethernet, 25G Ethernet and InfiniBand Enhanced Data Rate (EDR) requirements. Available in a broad range of wire gauges from 26AWG through 30AWG, this 100G copper cable assembly features low insertion loss and low cross talk.

Designed for applications in the data centre, networking and telecommunications markets that require a high speed, reliable cable assembly, this next generation product shares the same mating interface with QSFP+ form factor, making it backward compatible with existing QSFP ports.

High Speed Characteristics

| Parameter | Symbol | Min | Typical | Max | Unit | Note |
|---|----------------|--------|---------|-------|------|----------------------|
| Differential Impedance | TDR | 90 | 100 | 110 | Ω | |
| Insertion loss | SDD21 | -22.48 | | | dB | At 12.8906 GHz |
| Differential Return Loss | SDD11 | | | See 1 | dB | At 0.05 to 4.1 GHz |
| | SDD22 | | | See 2 | dB | At 4.1 to 19 GHz |
| Common-mode to common-mode output return loss | SCC11 | | | -2 | dB | At 0.2 to 19 GHz |
| | SCC22 | | | | | |
| Differential to common mode return loss | SCD11 SCD22 | | | See 3 | dB | At 0.01 to 12.89 GHz |
| | | | | See 4 | | At 12.89 to 19 GHz |
| Differential to common Mode Conversion Loss | SCD21-IL | | | -10 | dB | At 0.01 to 12.89 GHz |
| | | | | See 5 | | At 12.89 to 15.7 GHz |
| | | | | -6.3 | | At 15.7 to 19 GHz |

Notes:

1. Reflection Coefficient given by equation $SDD11(dB) < -16.5 + 2 \times \text{SQRT}(f)$, with f in GHz
2. Reflection Coefficient given by equation $SDD11(dB) < -10.66 + 14 \times \log_{10}(f/5.5)$, with f in GHz
3. Reflection Coefficient given by equation $SCD11(dB) < -22 + (20/25.78) * f$, with f in GHz
4. Reflection Coefficient given by equation $SCD11(dB) < -15 + (6/25.78) * f$, with f in GHz
5. Reflection Coefficient given by equation $SCD21(dB) < -27 + (29/22) * f$, with f in GHz

Technical Datasheet

QSFP28 Pin Function Definition

| Pin | Logic | Symbol | Description |
|-----|------------|---------|-------------------------------------|
| 1 | | GND | Ground |
| 2 | CML-I | Tx2n | Transmitter Inverted Data Input |
| 3 | CML-I | Tx2p | Transmitter Non-Inverted Data Input |
| 4 | | GND | Ground |
| 5 | CML-I | Tx4n | Transmitter Inverted Data Input |
| 6 | CML-I | Tx4p | Transmitter Non-Inverted Data Input |
| 7 | | GND | Ground |
| 8 | LVTTL-I | ModSelL | Module Select |
| 9 | LVTTL-I | ResetL | Module Reset |
| 10 | | Vcc Rx | +3.3V Power Supply Receiver |
| 11 | LVCMOS-I/O | SCL | 2-wire serial interface clock |
| | LVCMOS-I/O | SDA | |
| 12 | | GND | Ground |
| 13 | | GND | Ground |
| 14 | CML-O | Rx3p | Receiver Non-Inverted Data Output |
| 15 | CML-O | Rx3n | Receiver Inverted Data Output |
| 16 | | GND | Ground |
| 17 | CML-O | Rx1p | Receiver Non-Inverted Data Output |
| 18 | CML-O | Rx1n | Receiver Inverted Data Output |
| 19 | | GND | Ground |
| 20 | | GND | Ground |
| 21 | CML-O | Rx2n | Receiver Inverted Data Output |
| 22 | CML-O | Rx2p | Receiver Non-Inverted Data Output |
| 23 | | GND | Ground |
| 24 | CML-O | Rx4n | Receiver Inverted Data Output |
| 25 | CML-O | Rx4p | Receiver Non-Inverted Data Output |
| 26 | | GND | Ground |
| 27 | LVTTL-O | ModPrsL | Module Present |
| 28 | LVTTL-O | IntL | Interrupt |
| 29 | | Vcc Tx | +3.3V Power supply transmitter |
| 30 | | Vcc1 | +3.3V Power supply |
| 31 | LVTTL-I | LPMMode | Low Power Mode |
| 32 | | GND | Ground |
| 33 | CML-I | Tx3p | Transmitter Non-Inverted Data Input |
| 34 | CML-I | Tx3n | Transmitter Inverted Data Input |
| 35 | | GND | Ground |
| 36 | CML-I | Tx1p | Transmitter Non-Inverted Data Input |
| 37 | CML-I | Tx1n | Transmitter Inverted Data Input |
| 38 | | GND | Ground |

Technical Datasheet

QSFP+ Pin Function Definition


| Pin | Logic | Symbol | Description |
|-----|-------------|---------|-------------------------------------|
| 1 | | GND | Ground |
| 2 | CML-I | Tx2n | Transmitter Inverted Data Input |
| 3 | CML-I | Tx2p | Transmitter Non-Inverted Data Input |
| 4 | | GND | Ground |
| 5 | CML-I | Tx4n | Transmitter Inverted Data Input |
| 6 | CML-I | Tx4p | Transmitter Non-Inverted Data Input |
| 7 | | GND | Ground |
| 8 | LVTTL-I | ModSelL | Module Select |
| 9 | LVTTL-I | ResetL | Module Reset |
| 10 | | Vcc Rx | +3.3V Power Supply Receiver |
| 11 | LVC MOS-I/O | SCL | 2-wire serial interface clock |
| 12 | LVC MOS-I/O | SDA | 2-wire serial interface data |
| 13 | | GND | Ground |
| 14 | CML-O | Rx3p | Receiver Non-Inverted Data Output |
| 15 | CML-O | Rx3n | Receiver Inverted Data Output |
| 16 | | GND | Ground |
| 17 | CML-O | Rx1p | Receiver Non-Inverted Data Output |
| 18 | CML-O | Rx1n | Receiver Inverted Data Output |
| 19 | | GND | Ground |
| 20 | | GND | Ground |
| 21 | CML-O | Rx2n | Receiver Inverted Data Output |
| 22 | CML-O | Rx2p | Receiver Non-Inverted Data Output |
| 23 | | GND | Ground |
| 24 | CML-O | Rx4n | Receiver Inverted Data Output |
| 25 | CML-O | Rx4p | Receiver Non-Inverted Data Output |
| 26 | | GND | Ground |
| 27 | LVTTL-O | ModPrsL | Module Present |
| 28 | LVTTL-O | IntL | Interrupt |

Technical Datasheet

| | | | |
|----|---------|--------|-------------------------------------|
| 29 | | Vcc Tx | +3.3V Power supply transmitter |
| 30 | | Vcc1 | +3.3V Power supply |
| 31 | LVTTL-I | LPMode | Low Power Mode |
| 32 | | GND | Ground |
| 33 | CML-I | Tx3p | Transmitter Non-Inverted Data Input |
| 34 | CML-I | Tx3n | Transmitter Inverted Data Input |
| 35 | | GND | Ground |
| 36 | CML-I | Tx1p | Transmitter Non-Inverted Data Input |
| 37 | CML-I | Tx1n | Transmitter Inverted Data Input |
| 38 | | GND | Ground |

Mechanical Information

The connector is compatible with the SFF-8436 specification

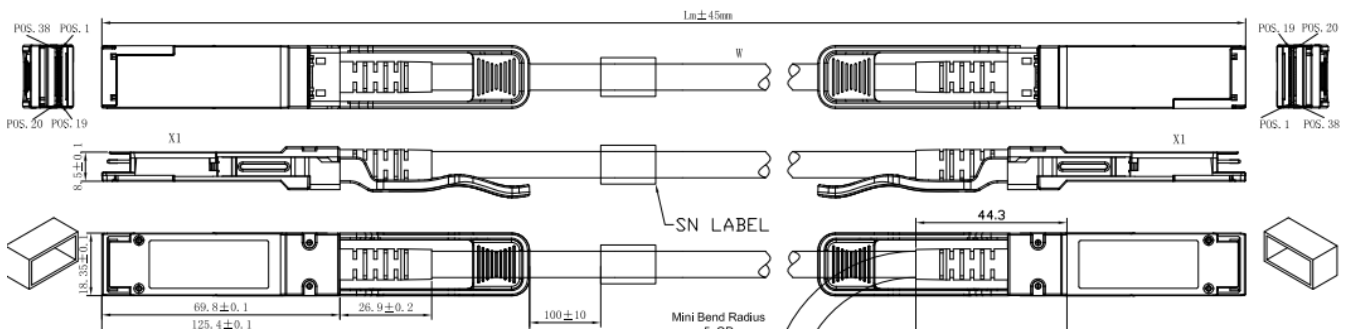

Technical Datasheet

Regulatory Compliance

| Feature | Test Method | Performance |
|---|---|---|
| Electrostatic Discharge (ESD) to the Electrical Pins | MIL-STD-883C Method 3015.7 | Class 1(>2000 Volts) |
| Electromagnetic Interference (EMI) | FCC Class B | Compliant with Standards |
| | CENELEC EN55022 Class B | |
| | CISPR22 ITE Class B | |
| RF Immunity (RFI) | IEC61000-4-3 | Typically Show no Measurable Effect from a 10V/m Field Swept from 80 to 1000MHz |
| RoHS Compliance | RoHS Directive 2011/65/EU and it's Amendment Directives (EU) 2015/863 | RoHS (EU) 2015/863 compliant |
| REACH Compliance | REACH Regulation (EC) No 1907/2006 | REACH (EC) No 1907/2006 compliant |

| Length (m) | Cable AWG |
|------------|-----------|
| 1 | 30 |
| 2 | 30 |
| 3 | 26/30 |
| 4 | 26 |
| 5 | 26 |