



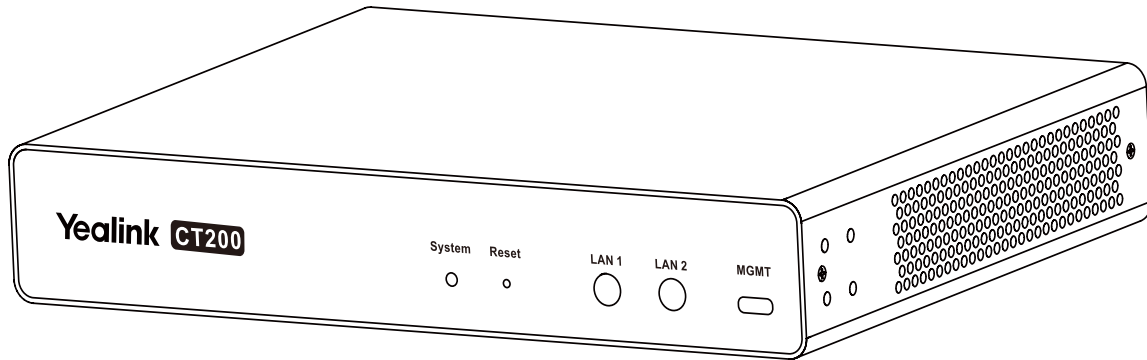


CT200

Quick Start Guide V1.1


Package Contents




CT200



(3m, 9.84ft)
CAT5e Cable




(12V/2A)
Power Adapter




(1m, 3.28ft)
USB 3.0 Type(A-C) Cable




Expansion
Nuts and Screws



Mounting Ears and
Screws



Connection Piece
and Screws




Quick Start Guide




We recommend that you use the accessories provided or approved by Yealink. The use of unapproved third-party accessories may result in poor performance.

- Mount on the Rack (19-Inch)
- Single Device Installation

1 Install the mounting ears on one side of the device.

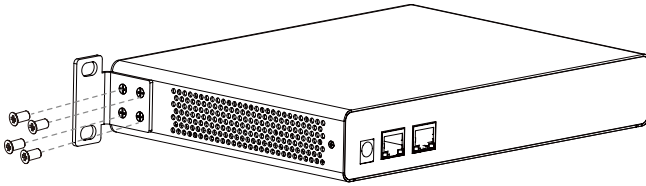


2 Push the CT200 into the rack, and then fix it to the rack with screws.

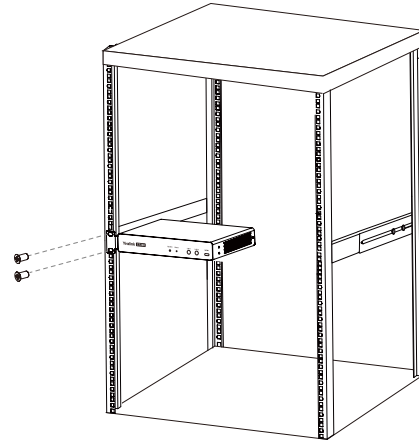


• Dual Device Installation

- 1 Securely connect the two CT200 devices using screws and connection piece.
- 2 Attach the mounting ears to both the left and right sides of the two CT200 devices .

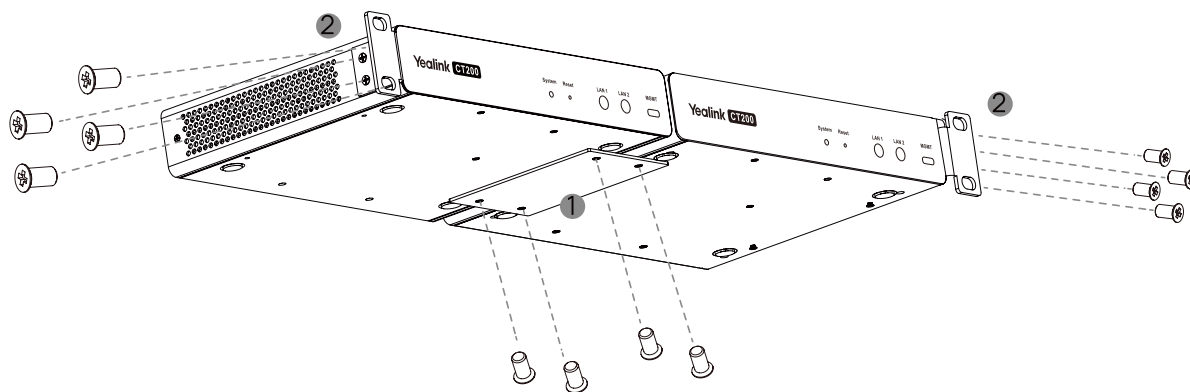


- 3 Push the CT200 into the rack, and then fix it to the rack with screws.

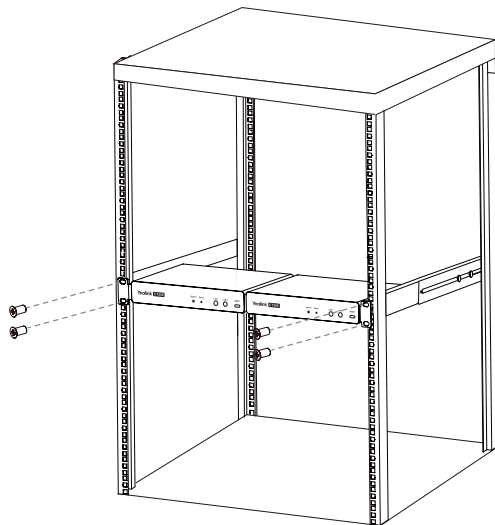


- Under a Table or on a Wall

- ① Install the mounting ears on both sides of the CT200.
- ② Use the mounting ears to mark holes on the mounting surface.
- ③ Drill holes and insert the expansion nuts.
- ④ Fix the CT200 on the mounting surface with the expansion screws.

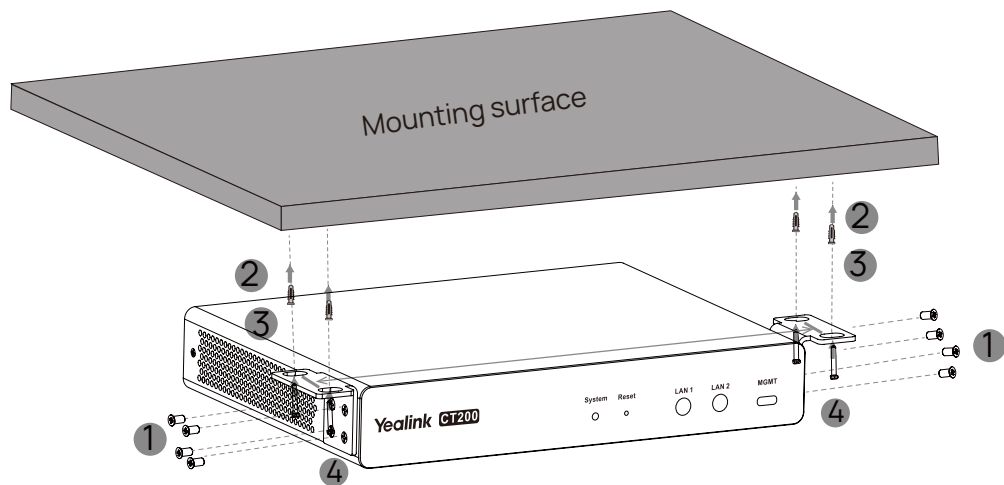


Hardware Interface Instructions

Front Panel

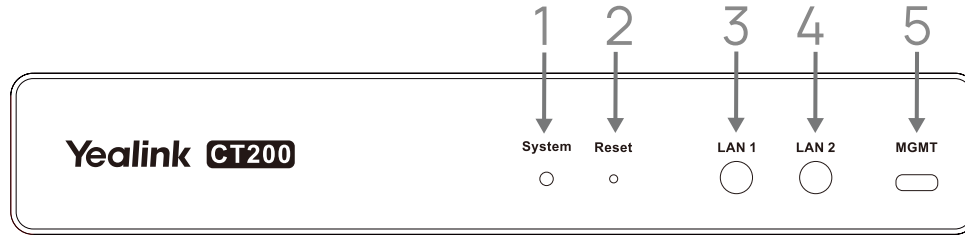

Interface	Description
① System light	See page 10 for the lighting effects.
② Reset	• After Powering on, hold the button for 5 s to reset CT200 into factory defaults. • Power on the device by holding the button, and after powering on, hold the button for 10 s to switch to the backup system.
③ ④ LAN1/LAN2	• Quickly tap three times to switch the network mode to either DHCP or Static IP mode. - Switch to Static IP Mode: - LAN1 IP: https://192.168.61.11. - LAN2 IP: https://192.168.61.12. Note: The default username is admin. • Press for 10 s to restore the network configuration to its default state. See page 11 for the lighting effects.
⑤ MGMT	Connect the computer through this interface to log in to https://192.168.62.8 to access the device's web interface for management. Note: The default username is admin.

Rear Panel

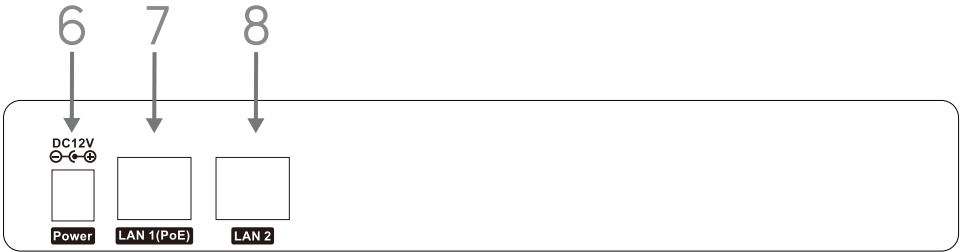

Interface	Description
⑥ Power	Connect to power adapter (12V/2A).
⑦ LAN1	RJ-45 port for device control and management (PoE).
⑧ LAN2	RJ-45 port for device control and management (Default router).

LED Indicator Instructions

- System Light

LED Status	Description
Off	Powered Off
Solid green	In normal and operational status
Solid orange	• Booting • Initializing
Slowly flashing orange	Updating firmware
Fast flashing orange twice	Resetting
Flashing red twice	Change Backup system
Flashing red and green alternate	Searching devices

- LAN Light

LED Status	Description
Off	No network available
Solid green	Network connected
Flashin green 5 s	Reset network settings to factory default
Flashing red	Network error
Flashing yellow 2 s	Change network to DHCP mode
Flashing blue 2 s	Change network to Static IP mode

Regulatory Notices

Operating Ambient Temperatures

- Operating temperature: +14 to 113°F (-10 to +45°C)
- Relative humidity: 5% to 90%, noncondensing
- Storage temperature: -22 to +158°F (-30 to +70°C)

Warranty

Our product warranty is limited only to the unit itself, when used normally in accordance with the operating instructions and the system environment. We are not liable for damage or loss resulting from the use of this product, or for any claim from a third party. We are not liable for problems with Yealink device arising from the use of this product; we are not liable for financial damages, lost profits, claims from third parties, etc., arising from the use of this product.

DC symbol

— is the DC voltage symbol.

Restriction of Hazardous Substances Directive (RoHS)

This device complies with the requirements of the EU RoHS Directive. Statements of compliance can be obtained by contacting support@yealink.com.

Safety Instructions

Save these instructions. Read these safety instructions before use!

The following basic safety precautions should always be followed to reduce risk of fire, electrical shock, and other personal injury.

Environmental Requirements

- Place the product on a stable, level and non-slip surface.
- Do not place the product close to heat sources, in direct sunlight or next to any house hold appliance with strong magnetic field or electromagnetic field, such as a microwave oven or a refrigerator.
- Do not allow the product to come into contact with water, dust and chemicals.
- Protect the product from aggressive liquids and vapors.
- Do not place the product on or near any inflammable or fire-vulnerable object, such as rubber-made materials.
- Do not install the product in rooms with high humidity, for example, in bathrooms, laundry rooms and wet basements.

Safety Notes During Operation

- Use only spare parts and accessories supplied or authorized by Yealink. The operation of non-authorized parts cannot be guaranteed.
- Do not place heavy objects on top of the handset or the base station in case of damage and deformation caused by the heavy load.
- Do not open the handset or the base station by yourself for repair purpose, which could expose you to high voltages. Have all repairs carried out by authorized service personnel.
- Do not let a child operate the product without guidance.
- Keep the small accessories contained in your product out of reach of small children in case of accidental swallowing.
- Before plugging or unplugging any cable, make sure that your hands are completely dry.
- Do not hold the handset up to your ear when speakerphone is on or when the ringer is ringing as the volume can be very loud, which may be harmful to your hearing.
- During a thunderstorm, stop using the product and disconnect it from the power supply to avoid lightning strike.
- If the product is left unused for a rather long time, disconnect the base station from the power supply and unplug the power adapter.

- When there is smoke emitted from the product, or some abnormal noise or smell, disconnect the product from the power supply, and unplug the power adapter immediately.
- Remove the electrical cord from an outlet by pulling gently on the power adapter, not by pulling the cord.

Notices of Cleaning

- Before cleaning the base station, stop using it and disconnect it from the power supply.
- Remove the battery before cleaning the handset to reduce risk of electric shock.
- Only clean your product with a piece of slightly moist and anti-static cloth.
- Keep the power plug clean and dry. Using a dirty or wet power plug may lead to electric shock or other perils.

ENVIRONMENTAL RECYCLING



Never dispose of the device with domestic waste

Ask your Town Council about how to dispose of it in an environmentally friendly way. The cardboard box, plastic packaging and player components may be recycled in accordance with prevailing recycling regulations in your country.

Always adhere to prevailing regulations

Those who fail to do so may be fined or prosecuted in accordance with the law. The crossed out garbage can that appears on the device means that when it has reached the end of its useful life, it should be taken to a special waste disposal center and treated separately to general urban waste.

Troubleshooting

The unit cannot supply power to Yealink device.

There is a bad connection with the plug.

1. Clean the plug with a dry cloth.

2. Connect it to another wall outlet.

The usage environment is out of operating temperature range.

1. Use in the operating temperature range.

The cable between the unit and the Yealink device is connected incorrectly.

1. Connect the cable correctly.

You cannot connect the cable properly.

1. You may have connected a wrong Yealink device.

2. Use the correct power supply.

Some dust, etc., may be in the port.

1. Clean the port.

Contact your dealer or authorized service facility for any further questions.

Contact Information

YEALINK NETWORK TECHNOLOGY CO., LTD.

No.666 Hu'an Rd, Huli District Xiamen City, Fujian, P.R.C

YEALINK (EUROPE) NETWORK TECHNOLOGY B.V.

Sir Winston Churchill In 299 k, 2288DC Rijswijk

YEALINK (USA) NETWORK TECHNOLOGY CO., LTD.

999 Peachtree Street Suite 2300, Fulton, Atlanta, GA, 30309, USA

Made in China



Declaration of Conformity

We,

YEALINK(XIAMEN) NETWORK TECHNOLOGY CO.,LTD

Address: No.666 Hu'an Rd. Huli District Xiamen City, Fujian, P.R. China

Manufacturer: YEALINK(XIAMEN) NETWORK TECHNOLOGY CO.,LTD

Address: No.666 Hu'an Rd. Huli District Xiamen City, Fujian, P.R. China

DATE: 11th / August / 2024

declare that the product

Type: Control System

Model: CT200

meets the essential requirements and other relevant provisions according to the following EC directive

Directive: 2014/30/EU, 2014/35/EU

Conformity

The product complies with the following standards:

Safety : IEC 62368-1:2018, EN 62368-1:2020+A11:2020

EMC: EN 55032:2015+A11:2020+A1:2020

EN 55035:2017+A11:2020

EN IEC 61000-3-2: 2019+A1:2021

EN 61000-3-3: 2013+A1:2019+A2:2021

Harmonized: UN-EN62321

Directive 2011/65/EU and (EU)2015/863 of the European Parliament and of the Council of 8 June 2011 and 4 June 2015 on the restriction of the use of certain hazardous substances in electrical and electronic equipment(RoHS 2.0)

Directive 2012/19/EU of the European Parliament and of the Council of 4 July 2012 on Waste electrical and electronic equipment(WEEE)


Regulation (EC) No.1907/2006 of the European Parliament and of the Council of 18 December 2006 on Registration, Evaluation, Authorization, and Restriction of Chemicals (REACH)

The declaration of conformity is issued under the sole responsibility of the manufacturer

NAME: Huahu Wang

DATE:

TITLE: Manager



About Yealink

Yealink (Stock Code: 300628) is a global-leading provider of Unified Communication & Collaboration Solutions specialized in video conferencing, voice communications, and collaboration, dedicated to helping every person and organization embrace the power of "Easy Collaboration, High Productivity".

With best-in-class quality, innovative technology, and user-friendly experiences, Yealink is one of the best providers in more than 140 countries and regions, ranks No.1 in the global market share of IP Phone, and is the Top 5 leader in the video conferencing market (Frost & Sullivan, 2021).

Technical Support

Visit Yealink WIKI (<http://support.yealink.com/>) for firmware downloads, product documents, FAQ, and more. For better service, we sincerely recommend you to use Yealink Ticketing system (<https://ticket.yealink.com>) to submit all your technical issues.

YEALINK(XIAMEN) NETWORK TECHNOLOGY CO.,LTD.

Web: www.yealink.com

Addr: No.666 Hu'an Rd,Huli District Xiamen City, Fujian, P.R.C

Copyright©2024 Yealink Inc. All right reserved.



430104003136