


RM-NUC-T2

VENDOR
Universal

SUPPORTED MODELS
NUC's

COLOR
BLACK

DIMENSIONS
(HxWxD)
58.7 x 483 x 217 mm
2.31 x 19.00 x 8.54 inch

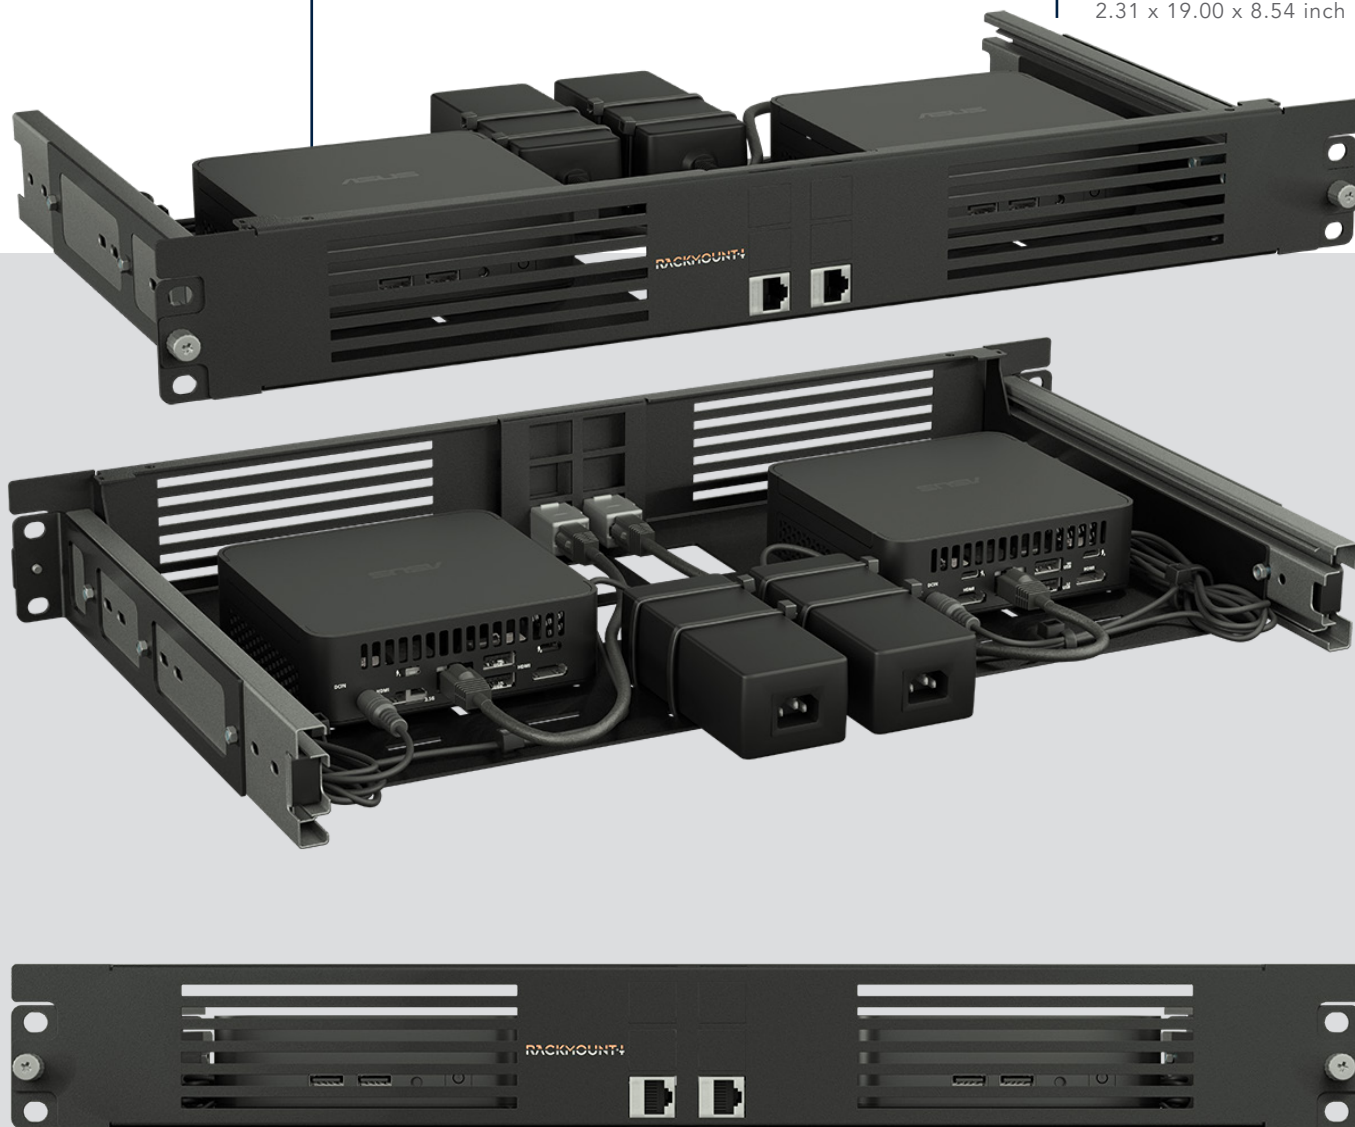

Please ensure proper ventilation according to the network appliance manufacturer's guidelines.



**CONSIDER THE ENVIRONMENT,
RECYCLE WHERE APPLICABLE**

QUESTIONS

For support, contact Emerson GSC.

RACKMOUNT+

Install Guide - 23-12-2025

RM-NUC-T2

VENDOR
Universal

SUPPORTED MODELS
NUC's

COLOR
BLACK



DIMENSIONS
(HxWxD)
58.7 x 483 x 217 mm
2.31 x 19.00 x 8.54 inch

Mounting instructions

The NUC can be installed directly onto the rackmount or using a VESA mount. With both methods, the NUC can be oriented in any direction. When placed directly on the rack, it can also be repositioned along the X or Y axis.

Sliders

1. Take one slider, extend it completely, then push the black lever either up or down to separate it into two parts. See picture 1.
2. Attach the part with the lever to the rack. Use bolts on the inside and nuts on the outside. The pre-drilled holes can only be aligned in one orientation. See picture 2.
3. Attach the other part to one of the brackets, using bolts on the inside and nuts on the outside. Align the bracket on the side where it will slide out, this is the only way the mounting holes will align correctly. See picture 3.
4. Repeat steps 1 to 3 for the other slider.
5. Secure both brackets in the server cabinet, but do not tighten the screws completely yet, this is done with step 12.



Direct Installation

6. Place the NUC on the rack with the mounting holes aligned above the slots. Secure it with 2 black screws and continue with step 9.

VESA Installation

6. Place the VESA mount on the rack. Insert 4 silver screws from the bottom of the rack through the rack and the VESA mount, then secure it with 4 nuts.
7. Slide the NUC onto the VESA mount.
8. Place the power supply on the rack and secure it with 2 zip ties. Connect the power supply to the appliance.
9. Form a small loop with the power cable and tie it to the rack as strain relief. Secure any excess cable to the rack.
10. Connect the appliance to the keystone using the supplied cable.

Optional – Additional Keystones

11. To install more keystones, remove the metal brackets in the front plate. Use a hammer and screwdriver to break them out, then wiggle until they come loose. Be cautious of sharp edges.
12. Slide the sliders that are attached to the rack, back into the sliders that are secured to the server cabinet. Now tighten the screws. Place the blindplate below it.

Please ensure proper ventilation according to the network appliance manufacturer's guidelines.

PACKAGE CONTENTS

- 1 Rackmount
- 1 Blindplate
- 8 Nut M3
- 8 Bolts silver M3 6mm
- 6 Bolts black M3 8mm
- 8 Zip ties
- 2 Cat 6 shielded cable
- 1 Allen key
- 2 Brackets
- 2 Sliders
- 12 Bolts M4
- 12 Nuts M4

Appliance not included.



**CONSIDER THE ENVIRONMENT,
RECYCLE WHERE APPLICABLE**

QUESTIONS

Email support@rackmount.it or contact your reseller.

RACKMOUNT.IT

Install Guide - 23-12-2025