


RM-CI-T31

VENDOR
CISCO

SUPPORTED MODELS
C8111-G2-MX-C
C8121-G2-MX

COLOR
CISCO BLUE

DIMENSIONS
(HxWxD)
44 x 483 x 366 mm
1.73 x 19.00 x 8.54 inch

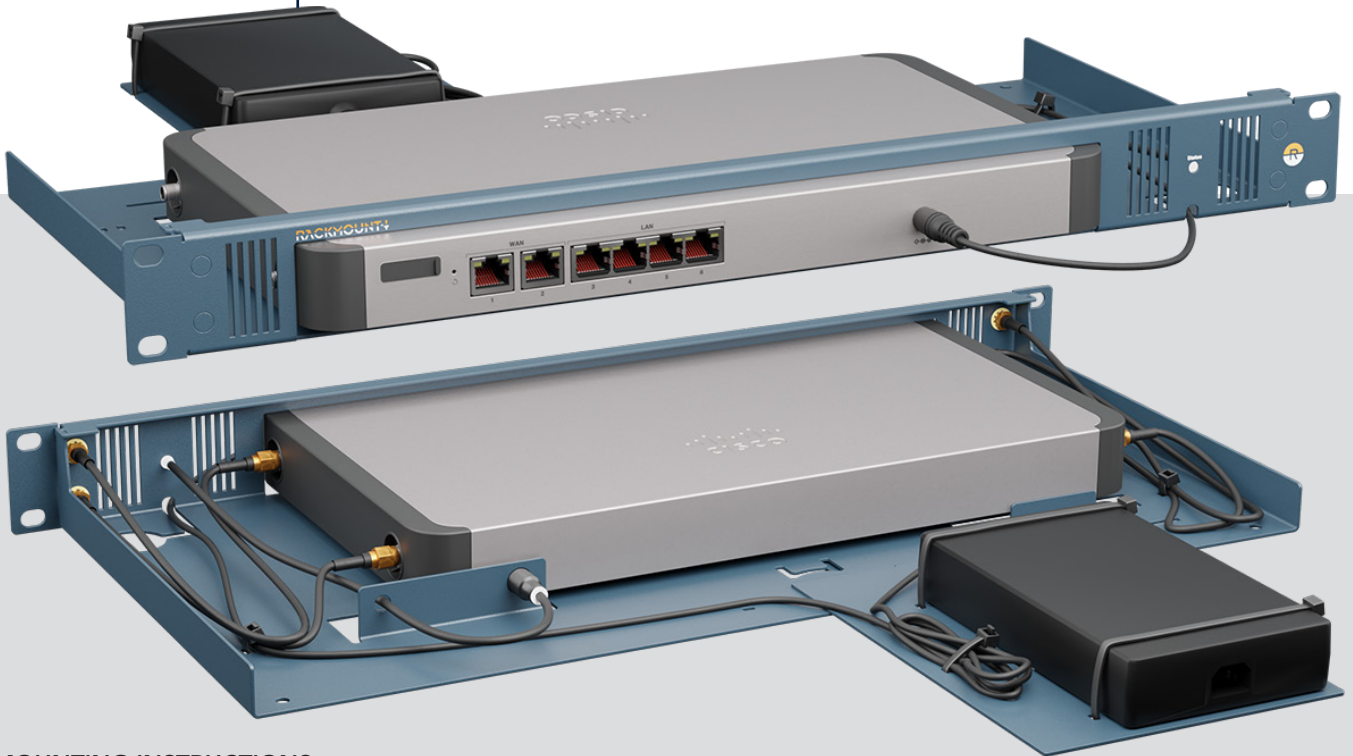

MOUNTING INSTRUCTIONS

Removing punch-outs for antennas

1. Position the hammer close to the pre-scored edge and punch out the holes.
Mount the SMA cable here (not included).

Mounting appliance

1. Insert the lens into the hole marked "status".
2. Guide the lightpipe through the left bracket opening (right rear of rack), then back through the right opening to the front. Insert the leading end into the lens; the appliance secures the trailing end.
3. Flip the appliance over. Remove the four rubber feet and two bolts from the rear.
4. Insert the appliance backwards through the FRONT opening of the rack.
5. Turn the rack over. Secure the appliance to the rack using the supplied bolts.
6. Place the power supply on the extension plate. Secure it with the 2 zip ties.
7. Hook the extension plate into the rack.
8. Route the power cable through the round hole at the front of the rack. Connect it to the power inlet. Secure excess cable with a zip tie.

PACKAGE CONTENTS

- 1 Rackmount
- 3 Zip ties
- 2 Bolts
- 1 Lightpipe
- 1 Lens

Appliance not included.

Please ensure proper ventilation according to the network appliance manufacturer's guidelines.



**CONSIDER THE ENVIRONMENT,
RECYCLE WHERE APPLICABLE**

QUESTIONS

Email support@rackmount.it or contact your reseller.

RACKMOUNT.IT

Install Guide - 12-03-2026