

Product Line
CISRACK

Type
RM-CI-T4

Supported Models

MERAKI MX64
MERAKI MX64W
MERAKI MX67
MX67W/MX67C

DIMENSIONS 1U


COLOR Metallic Blue

PACKING DIMENSIONS 80 x 520 x 270 mm

3.14 x 20.47 x 10.63 in

PRODUCT DIMENSIONS 44 x 482 x 217 mm

(height x width x depth) 1.73 x 18.98 x 8.54 in

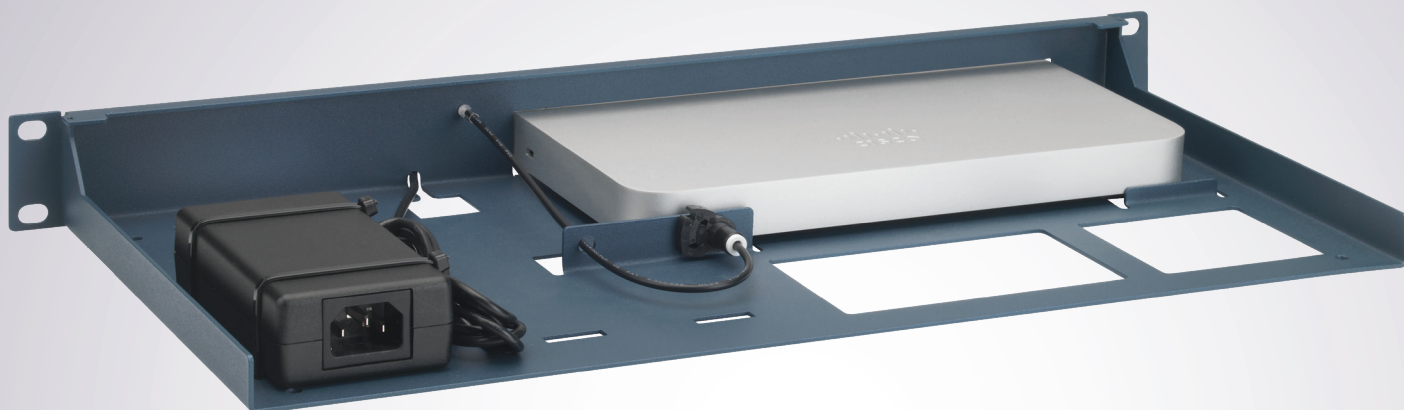

MOUNTING INSTRUCTIONS

1. Remove the 4 rubber feet from your Cisco appliance.
2. Remove the 2 bolts (situated on the front side of the appliance) from the bottom of the Cisco appliance.
3. Place your Cisco appliance backwards through the FRONT opening of the rack.
4. Turn over the rack with the Cisco appliance.
5. Use the original bolts to fixate the Cisco appliance on the rack and turn it back over.
Tip: use a table edge so the appliance is pinned down to the frame and the bolt holes line up.
6. Place the power supply on the rack and tie it down with the 2 zip ties.
7. Lead the low voltage power cable through the large square hole towards the front of the rack and connect it to the power inlet.
8. Tie the excess length of the power cable down with the 3rd zip tie.
9. Place the light pipe through the opening of the rack. See picture above.
10. Place your CisRack in your 19 inch rack.

Please ensure proper ventilation according to the network appliance manufacturer guidelines.

PACKAGE CONTENTS

Qty	Description
1	CisRack + light pipe
3	Zip ties
1	Torx T6 key (for MX64)
1	Torx T8 key



**Consider the environment,
recycle where applicable.**

Rackmount.IT rack mount kits are RoHS compliant, developed & manufactured in the Netherlands and made of first quality parts.

In case of problems please contact your reseller or sales@rackmount.it.

Revision 6 - 03-11-2020

EMEA Office
Nonneveld 27
4811 HN Breda
The Netherlands
T +31 76 200 37 40
E sales@rackmount.it
WWW.RACKMOUNT.IT

US Office
9201 Metric Blvd - Unit A
Austin - TX 78758
United States
T +1 512 521 03 33
E sales-us@rackmount.it

RACKMOUNT.IT