

Thermal Pad

High Performance Gap Filler

Main Features



- Electrically non-conductive
- Thermal Conductivity 6.0 W/mK
- Safe and easy handling

Thermal Pad

High Performance Gap Filler

The ARCTIC **Thermal Pad** provides an efficient thermal interface between heat sinks and electronic devices where uneven surface topography, air gaps and rough surface textures are present.

The silicone based material outperforms generic pads by far, is flexible and adaptive and thus works also at low pressure.

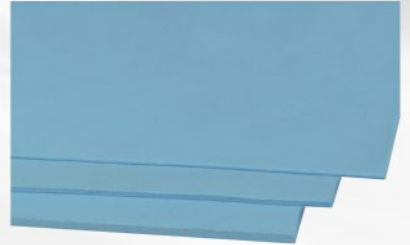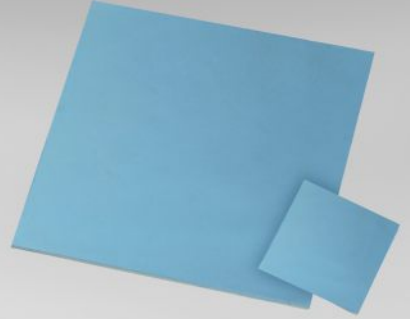

Specifications	
Dimensions	50 x 50 mm or 145 x 145 mm
Thickness	0.5 mm or 1.0 mm or 1.5 mm
Thermal Conductivity	6.0 W/mK
Hardness	25 Shore 00
Specific Gravity	3.2 g/cm ³
Colour	Blue
Continuous Use Temperature	-40~200 °C
Volume resistance	1 X 10 ¹² Ω-cm
Breakdown Voltage	12 KV/mm
Tensile strength	2.5 Kgf/cm ²
Elongation	45 %
Dielectric constant	14.1816 ε at 60 Hz 13.0264 ε at 1K Hz 13.0264 ε at 1M Hz
UL Flammability	V-0

