

## MultiBoard MX V2 G80-8040



Models may vary from the image shown

### Freely programmable compact keyboard with magnetic card reader and chip card reader

Why not determine the rules on your keyboard yourself and decide just how much independence and comfort you want! Our V2-USB keyboard models are completely programmable. The MX V2 G80-8040 can be used with standard magnetic and chipcard readers as required. Slightly larger than its sister model 7040, the 8040 offers added comfort throughout the range of functions.

### Key benefits

- Individual keys with Gold Crosspoint contacts (MX technology)
- Designed for continuous usage - over 50 mill. confirmations per key
- Robust and reliable
- Fully programmable USB 2.0 keyboard
- PC/SC chip card terminal with high-quality landing contacts
- 3-Track Magnetic Stripe Reader
- Programming type can be selected: physically (internal memory) or via software macros using "Cherry Tools" software
- Statistics provided via WMI
- UPOS for Windows® and Linux; client-server architectures supported
- Efficient configuration with professional Cherry Tools Software
- On request: integrated USB hub with high-power downstream ports (500mA, self-powered, high-speed)

### Magnetic Stripe Reader

- 3-track reader
- Data transfer via USB HID as keyboard scan codes (keyboard emulation; pre-setting) or optionally as raw data
- Freely-programmable header and terminator per magnetic card track
- Adjustable transmission of the start and end characters (sentinels)
- Filtering and replacement of card data
- Increased security during card processing due to the programming of extended hex codes
- Acoustic signal which can be activated following successful or unsuccessful reading of the magnetic card, signal duration can be set.
- Freely-selectable output sequence of the tracks
- Optional output of LRC bytes
- Programming and output of ALT sequences

### Technical Data:

#### Layout (country or language):

Product dependant, see table "Models"

#### Housing colour:

Product dependant, see table "Models"

#### Key colour:

Product dependant, see table "Models"

#### Weight (product):

approx. 1300 g

#### Total weight (with packaging):

approx. 1680 g

#### Cable Length:

approx. 2.20 m

#### Storage Temperature:

-20°C to 60°C

#### Operating Temperature:

0°C to 50°C







#### Current Consumption:

typ. 190 mA, < 2.5 mA in USB Suspend Mode

#### Interface:

- USB

#### Product approvals:

- cURus 
- VDE GS 
- c-tick 
- VCCI 
- CE 
- FCC 

#### System requirements:

- USB plug and USB supporting operating system

#### Delivery Volume:

- MultiBoard MX V2 G80-8040
- Operating instructions in hard copy

## Dimensions (product):

approx. 470 x 220 x 64 mm

## Packaging dimensions:


approx. 521 x 277 x 72 mm

## Reliability:

- MTBF > 100,000 hours
- MCBF > 10 bill. operations

## Keyboard:

- Key technology: MX
- Service life, standard key: > 50 million key operations
- Operation characteristics: BLACK SWITCH Linear (60 cN)

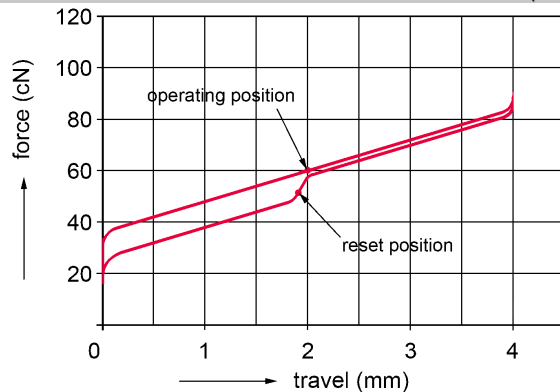

- Inscription technology: Laser
- Inscription layout: Standard
- Number of Keys: 105

## Smart card reader:

- Type: Mechanical
- Hardware interface: USB
- Agency Approvals: EMVCo Level 1 compliant
- Chip-card protocols: T=0, T=1, S=8, S=9, S=10
- Contact: mechanical landing contacts
- Software interface: CT-Api, PC/SC, OCF
- Mating cycles: > 200,000 operations
- Compatible chip card types: Reads and writes on all ISO 7816 cards
- Transmission speed reader <=> card: max. 420 kBit/s
- Transmission speed reader <=> system: max. 12 MBit/s

## Magnetic Stripe Reader:

- Magnetic card tracks: Track 1, Track 2, Track 3
- Magnetic card standards: ISO 7811/-12, JIS 1/2, AAMVA, Gemini
- Magnetic card reading speed: 8 - 318 cm/s at 30 Bit/cm, 8 - 127 cm/s at 83 Bit/cm
- Magnetic card reading cycles: up to 1 mill. reading cycles
- Magnetic card swipe direction: from right to left

## Packaging Unit:

- Number of products in the master package: 31
- Number of master packages per pallet: 2

## Warranty:

2 years

Errors, technical changes and delivery possibilities excepted. Technical information refers only to the specifications of the products. Features may differ from the information provided.

**Models:**

(possible country/layout versions, others available on request)

	<b>Product name</b>	<b>Order number</b>	<b>Layout (country or language)</b>	<b>Housing colour</b>	<b>Key colour</b>
1	MultiBoard MX V2 G80-8040	G80-8040LUVDE-0	Germany	light grey	light grey
2	MultiBoard MX V2 G80-8040	G80-8040LUVDE-2	Germany	black	black
3	MultiBoard MX V2 G80-8040	G80-8040LUVES-2	Spain	black	black