

GEP-1621 Version: 1



16-Port Gigabit PoE Switch, 802.3at/af PoE

The LevelOne GEP-1621 is a Gigabit PoE-Plus Switch with 16 x 10/100/1000Base-T PoE-Plus ports. This switch is IEEE 802.3af/at compliant, providing power and data over a single Ethernet cable to any PoE device, with total power budget of 240W, up to 30W per port. Ideal for desktops, it is also 19-inch rack-mountable, which provides convenient and flexible installation. The GEP-1621 is designed for small-to-median businesses that prefer an affordable solution for PoE deploying infrastructure.



1. LED Indicators
2. 10/100/1000Mbps RJ-45 PoE Ports
3. Power Socket
4. Power Switch

Key Features

- 16 PoE-Plus Gigabit Ethernet ports
- 10/100/1000Mbps wire speed transmission and reception
- IEEE 802.3af/at PoE compliant to simplify deployment and installation
- Auto-detection and protection of non-standard PoE devices
- 9K jumbo frames to increase data transfer rates
- Supports 8K MAC address auto-learning and auto-aging
- IEEE 802.3x Flow Control protects against lost packets for reliable data transmission
- Minimize carbon footprint with advanced energy efficient technology (IEEE 802.3az)
- 19-inch metal housing
-

Related Product



POR-1220

Gigabit PoE Repeater, Cascadable, 802.3at/af PoE, Indoor/Outdoor

Specifications

System Specifications

Standards & Protocols:

IEEE 802.3 10-BASE-T, Ethernet
IEEE 802.3u 100-BASE-TX, Fast Ethernet
IEEE 802.3ab 1000BASE-T, Gigabit Ethernet
IEEE 802.3x Flow Control (full-duplex flow control)
IEEE 802.3af Power over Ethernet (PoE)
IEEE 802.3at Power over Ethernet Plus (PoE+)
IEEE 802.3az Energy-Efficient Ethernet

Buffer Memory:

256KB

Connectors and Cabling:

16 x RJ-45 10/100/1000Base-T PoE-Plus ports

Indicator:

Power; Link/Active; PoE

Transmission Method:

Store-and-Forward

Power Input:

100-240V AC, 50-60 Hz, Internal Power Supply

Power Consumption:

< 120W (GEP-1621W120)
< 150W (GEP-1621W150)
< 250W (GEP-1621)
< 380W (GEP-1621W380)

Backplane (Gbps):

32Gbps

MAC Address Table:

8K

Data Transfer Rate:

10/100/1000Mbps

Features

General:

Flow Control: Half Duplex - Backpressure; Full Duplex - Pause frame

PoE:

Power Budget: Max. 110W (GEP-1621W120)

Max. 140W (GEP-1621W150)

Max. 240W (GEP-1621)

Max. 370W (GEP-1621W380)

Power Output: Up to 30W per port

Protection: Circuit protection to prevent power interference between ports

Pin Assignment: 1/2(+), 3/6(-)

Performance

Packet Forwarding Rate:

1000Mbps port - 1,488,000pps

100Mbps port - 148,000pps

10Mbps port - 14,880pps

Jumbo Frame (K):

9KB

Environment

Power Saving:

IEEE 802.3az Energy Efficient Ethernet:

- Automatically turns power off on RJ-45 port when detecting link down or Idle of client
- Cable length detection: Adjusts the signal strength based on the cable length
- Reduces the power consumption for cables shorter

Temperature (°C):

Operating: 0°C ~ 50°C

Storage: -40°C ~ 70°C

Humidity (Non-condensing):

Storage: 5% ~ 90%

Operating: 5% ~ 90%

Installation:

19-inch rack-mountable

Physical Specifications

Dimensions (W x D x H mm):

480 x 200 x 44 mm

Weight (g):

2900g

Reliability

MTBF:


48300 hours

Approval and Compliance

EMI/EMS:

FCC Part 15 Class A, CE, RoHS

Diagram

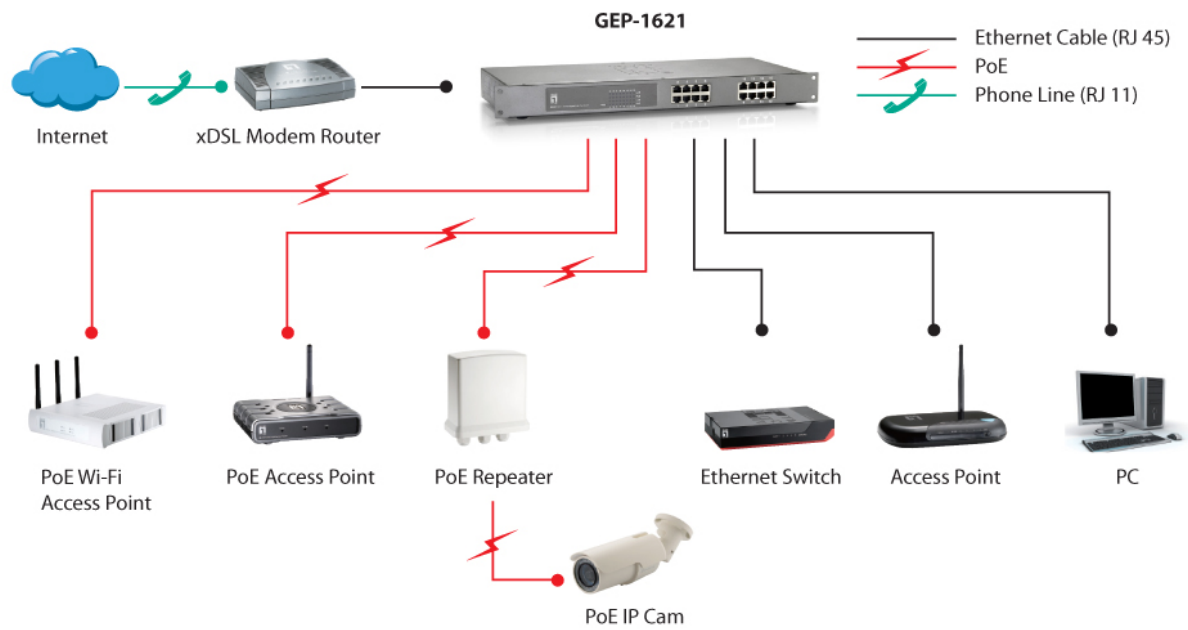

Order Information

GEP-1621: 250W
GEP-1621W380: 380W
GEP-1621W150: 150W
GEP-1621W120: 120W

Package Contents

GEP-1621
Power Cord
Quick Installation Guide

No liability or responsibility for any errors or omissions in the content.
Specifications are subject to change without notice.
All mentioned brand names are registered trademarks and property of their owners.
Copyright © Digital Data Communications GmbH, Germany. All Rights Reserved.