


10-Outlet Rack Mount Power Strip - 5-20R - 20A

Product Diagram (RKPW101920)

Front/Rear View

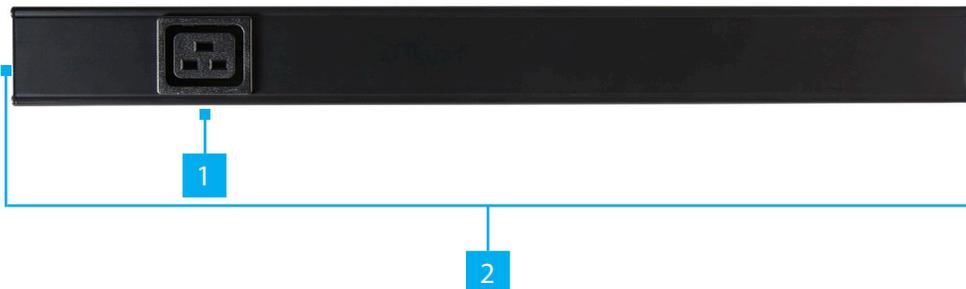

Front/Rear View



Port	Function
1 C19 Receptacle	• Connect a Power Distribution Unit (PDU) or Uninterruptible Power Supply (UPS)
2 Mounting Holes	• Connect the Reversible Mounting Brackets before mounting the Power Strip into a Server Rack
3 NEMA 5-20 (x10)	• Connect up to 10 Rack-Mounted Powered Devices from the Server Rack
4 Power Switch	• Rocker style Power Switch • Flip the Power Switch to the RESET position to Reset / turn the power On • Flip the Power Switch to the OFF position to turn the power Off
5 C20 Inlet	• Connect the Power Cable to provide power to the Power Strip


Requirements

For the latest requirements and to view the full manual, please visit: www.startech.com/RKPW101920.

- Power Source
- 1U of Server Rack Space
- Phillips Head Screwdriver

Installation

Mounting the Power Strip in a Server Rack

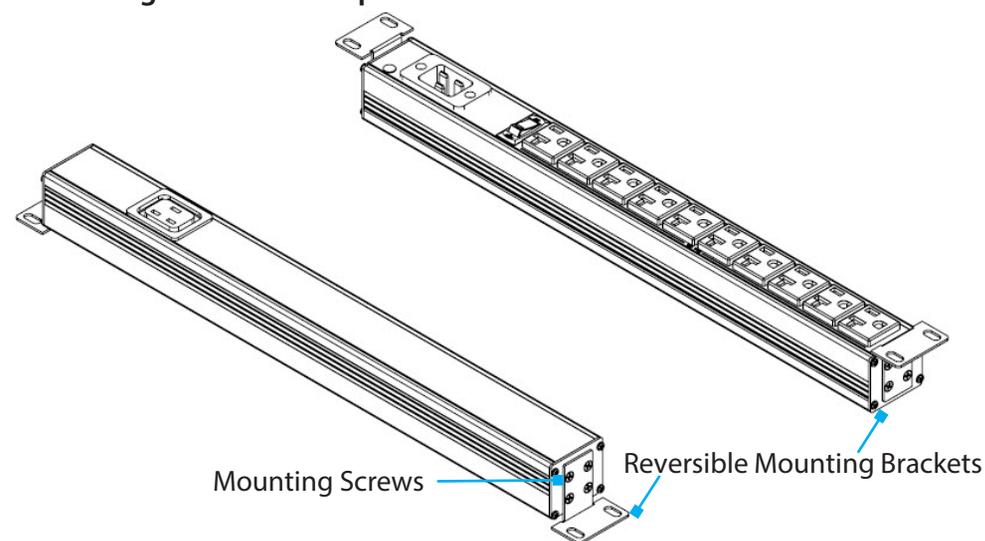

1. Determine the mounting location and mounting direction for the **Power Strip**.
Note: The **Power Strip** will use 1U of **Server Rack** space.
2. Align the 4 holes in one **Reversible Mounting Bracket** with the 4 **Mounting Holes** on one side of the **Power Strip**. Ensure the two **Server Rack Mounting Holes** in the **Reversible Mounting Bracket** are flush with the intended front side of the **Power Strip**.
3. Insert 4 **Mounting Screws** through the **Reversible Mounting Bracket** and into the **Power Strip**.

4. Tighten the 4 **Mounting Screws** using a **Phillips Head Screwdriver**.
5. Repeat steps 2-4 to install the second **Reversible Mounting Bracket**.
6. Install 4 **Cage Nuts** (sold separately) into the **Server Rack** in the desired mounting location .
7. Align the **Server Rack Mounting Holes** in the **Reversible Mounting Brackets** with the **Cage Nuts** in the **Server Rack**.
8. Insert 4 **M-Type Screws** (sold separately) through the **Server Rack Mounting Holes** in the **Reversible Mounting Brackets** and into the **Cage Nuts** in the **Server Rack**.
9. Tighten the 4 **M-Type Screws** using a **Phillips Head Screwdriver**.

Connecting the Powered Devices

- Connect the **NEMA 5-15** or **NEMA 5-20 Plugs** from up to 10 **Rack-Mounted Powered Devices** to the **NEMA 5-20 Receptacles** on the **Power Strip**.

Connecting the Power Source

1. Connect the **C19 Plug** from the **Power Cable** to the **C20 Inlet** on the **Power Strip**.
2. Connect the **NEMA 5-20 Plug** from the **Power Cable** to the **Power Source**.
3. Toggle the **Power Switch** to the **RESET** position.

Operation

In the event of a power surge, toggle the **Power Switch** to the **OFF** position then to the **RESET** position.

Use of Trademarks, Registered Trademarks, and other Protected Names and Symbols

This manual may make reference to trademarks, registered trademarks, and other protected names and/or symbols of third-party companies not related in any way to StarTech.com. Where they occur these references are for illustrative purposes only and do not represent an endorsement of a product or service by StarTech.com, or an endorsement of the product(s) to which this manual applies by the third-party company in question. StarTech.com hereby acknowledges that all trademarks, registered trademarks, service marks, and other protected names and/or symbols contained in this manual and related documents are the property of their respective holders. PHILLIPS® is a registered trademark of Phillips Screw Company in the United States or other countries.

Warranty Information

This product is backed by a two-year warranty. For further information on product warranty terms and conditions, please refer to www.startech.com/warranty.

Limitation of Liability

In no event shall the liability of StarTech.com Ltd. and StarTech.com USA LLP (or their officers, directors, employees or agents) for any damages (whether direct or indirect, special, punitive, incidental, consequential, or otherwise), loss of profits, loss of business, or any pecuniary loss, arising out of or related to the use of the product exceed the actual price paid for the product. Some states do not allow the exclusion or limitation of incidental or consequential damages. If such laws apply, the limitations or exclusions contained in this statement may not apply to you.

Safety Measures

- If product has an exposed circuit board, do not touch the product under power.

Mesures de sécurité

- Si l'un des circuits imprimés du produit est visible, ne pas touchez le produit lorsqu'il est sous tension.

安全対策

- 製品に露出した状態の回路基盤が含まれる場合、電源が入っている状態で製品に触らないでください。

Misure di sicurezza

- Se il prodotto ha un circuito stampato visibile, non toccare il prodotto quando è acceso.

Säkerhetsåtgärder

- Rör aldrig vid enheter med oskyddade kretskort när strömmen är påslagen.

StarTech.com Ltd. 45 Artisans Cres London, Ontario N5V 5E9 Canada	StarTech.com LLP 2500 Creekside Parkwy Lockbourne, Ohio 43137 U.S.A.	StarTech.com Ltd. Unit B, Pinnacle 15 Gowerton Rd, Brackmills Northampton NN4 7BW United Kingdom	FR: fr.startech.com DE: de.startech.com ES: es.startech.com NL: nl.startech.com IT: it.startech.com JP: jp.startech.com
--	--	---	--