

UBT

Rechargeable AGM battery 7 Ah - 9 Ah - 12 Ah - 17 Ah - 24 Ah / 12 V



UBT: Powerful and reliable back-up storage.


Salicru's **UBT** series batteries are extremely powerful and compact rechargeable lead-lead dioxide energy accumulators particularly suitable for UPSs and other security systems that require reliable and high-quality energy back-up.

Salicru's **UBT** battery range includes 7, 9, 12, 17 and 24 Ah models, all at 12 V.

The sulphuric acid electrolyte is absorbed by the separators and plates. And these in turn immobilised. They are designed using gas recombination technology which eliminates the need for the regular addition of water by controlling the evolution of hydrogen and oxygen during charging. The battery is completely sealed and watertight and therefore maintenance free, enabling it to be used in any position. If the battery is accidentally overcharged, resulting in the production of hydrogen and oxygen, a number of special one-way valves allow the gases to escape to avoid interior overpressure."

Applications:

Uninterruptible power supply systems (UPS), emergency lighting systems, signalling systems, communications and electrical equipment, broadcasting systems, lift automation panels, electronic cash registers, etc.

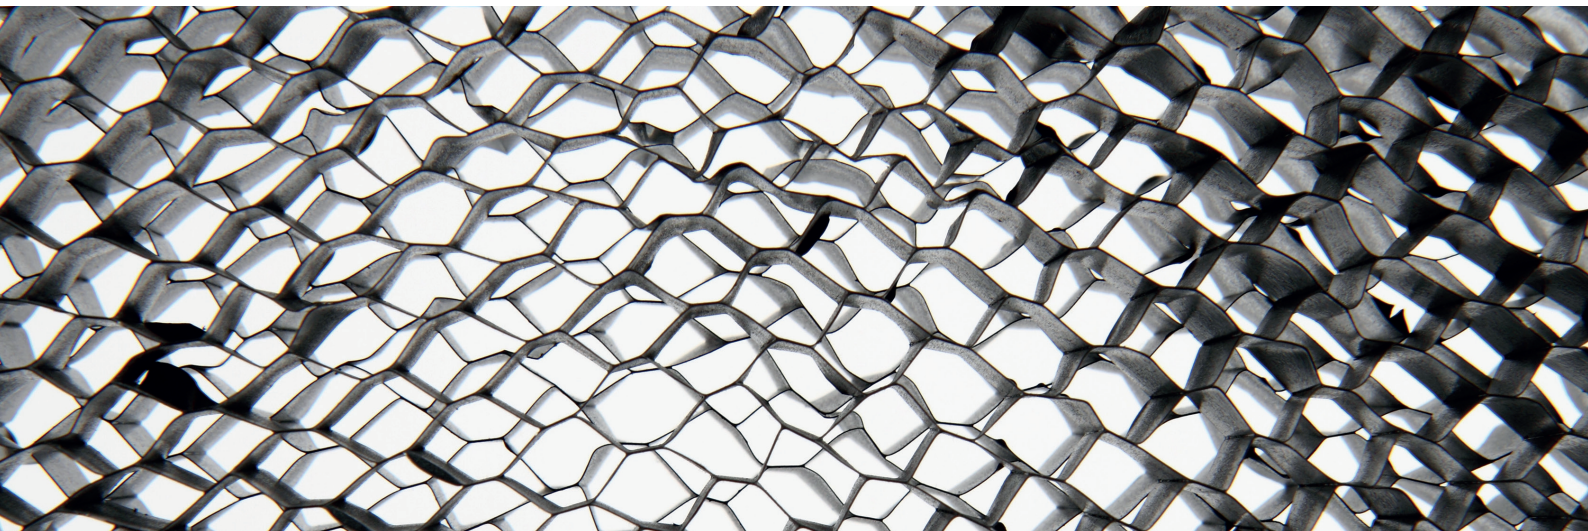



SALICRU

Performances

- AGM technology for efficient gas recombination of up to 99% and free of maintenance or adding water.
- No restrictions for air transport, compliance with IATA/ICAO Special Provision A67.
- Can be mounted in any position.
- Lead designed by computer with calcium/tin alloy rack for high energy density.
- Long service life in both float and cyclic applications.
- Maintenance-free.
- Low self-discharge





Behaviour charts

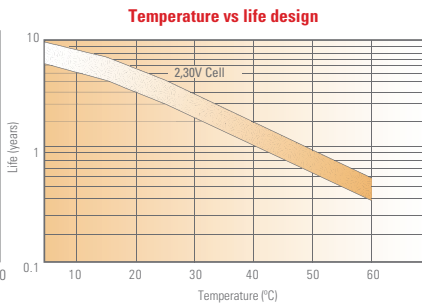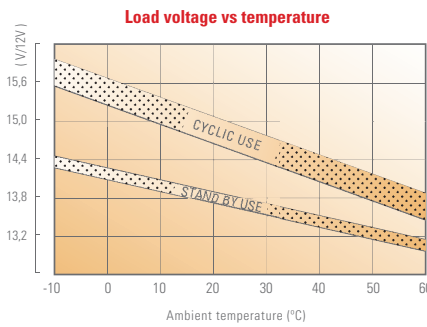

Battery Construction

| COMPONENT | RAW MATERIAL |
|----------------|-----------------|
| Negative plate | Lead |
| Container | ABS |
| Lid | ABS |
| Safety valve | Rubber |
| Terminal | Copper |
| Separator | Fibreglass |
| Electrolyte | Sulphuric acid |
| Electrolito | Ácido Sulfúrico |

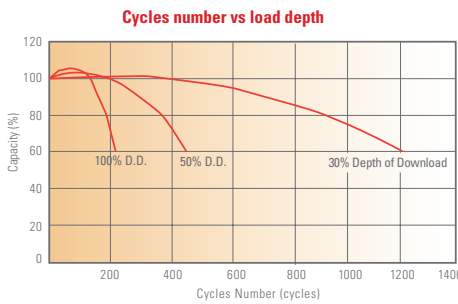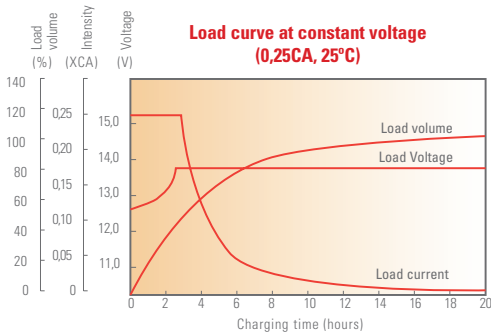

BATTERY COMPATIBILITY vs SERIES

| | UBT 12/7 | UBT 12/9 | UBT 12/12 | UBT 12/17 | UBT 12/24 |
|------------------------|----------|----------|-----------|-----------|-----------|
| SPS One | • | • | - | - | - |
| SPS Soho+ | • | • | - | - | - |
| SPS Advance T | • | • | - | - | - |
| SPS Advance R | • | • | - | - | - |
| SPS Advance RT2 | • | • | - | - | - |
| SLC Twin PRO2 0-3 kVA | • | • | • | - | - |
| SLC Twin PRO2 4-20 kVA | • | • | - | - | - |
| SLC Twin RT2 0-3 kVA | • | • | - | - | - |
| SLC Twin RT2 4-10 kVA | • | • | - | - | - |
| SLC Cube3+ | • | • | • | - | • |
| SLC Adapt / X | • | • | • | • | • |

Dimensions



UBT 12/7



UBT 12/9



UBT 12/12



UBT 12/17



UBT 12/24

Technical specifications

| MODEL | | UBT 12/7 | UBT 12/9 | UBT 12/12 | UBT 12/17 | UBT 12/24 |
|--------------------------------------|-----------|-----------------------------|----------------------------|------------------------------|------------------------------|-----------------------------|
| Nominal voltage (V) | | 12 | | | | |
| Number of cells | | 6 | | | | |
| Rated capacity at 25°C | 20 hours | 7.0 Ah (0.35 A. 10.5 V) | 9.0 Ah (0.45 A. 10.5 V) | 12 Ah (0.6 A. 10.5 V) | 17 Ah (0.85 A. 10.5 V) | 24 Ah (1.2 A. 10.5 V) |
| | 10 hours | 6.82 Ah (0.68 A. 10.5 V) | 8.2 Ah (0.82 A. 10.5 V) | 11.4 Ah (1.14 A. 10.5 V) | 16.9 Ah (1.69 A. 10.5 V) | 23.7 Ah (2.37 A. 10.5 V) |
| | 5 hours | 5.9 Ah (1.18 A. 10.5 V) | 7.7 Ah (1.54 A. 10.5 V) | 10.25 Ah (2.05 A. 10.5 V) | 16.55 Ah (3.31 A. 10.5 V) | 20.5 Ah (4.1 A. 10.5 V) |
| | 1 hour | 4.68 Ah (4.68 A. 9.6 V) | 6.0 Ah (6.0 A. 9.6 V) | 8.14 Ah (8.14 A. 9.6 V) | 13 Ah (13 A. 9.6 V) | 16 Ah (16 A. 9.6 V) |
| Internal resistance | | ≤25 mΩ ⁽¹⁾ | ≤18 mΩ ⁽¹⁾ | ≤19 mΩ ⁽¹⁾ | ≤15 mΩ ⁽¹⁾ | ≤12 mΩ ⁽¹⁾ |
| Self-discharge | | 3% ⁽²⁾ | | | | |
| Operating temperature range | Discharge | -20°C ÷ +60°C | | | | |
| | Charge | -10°C ÷ +60°C | -10°C ÷ +50°C | -10°C ÷ +60°C | | |
| | Storage | -20°C ÷ +60°C | -10°C ÷ +55°C | -20°C ÷ +60°C | | |
| Maximum discharge current | | 140 A (5s) | 180 A (3s) | 180 A (5s) | 225 A (5s) | 300 A (5s) |
| Short-circuit current | | 450 A | | 600 A | 950 A | 1200 A |
| Dimensions | Depth | 151 mm ±1 mm | | | 181 mm ±1 mm | 166 mm ±1 mm |
| | Width | 65 mm ±1 mm | | 98 mm ±1 mm | 77 mm ±1 mm | 175 mm ±1 mm |
| | Height | 93,5 mm ±1 mm | 94 mm ±1 mm | 95 mm ±1 mm | 167 mm ±1 mm | 125 mm ±1 mm |
| Overall dimensions (with connectors) | Height | 101 mm ±1 mm | 100 mm ±1 mm | 101 mm ±1 mm | 167 mm ±1 mm | 125 mm ±1 mm |
| Weight | | 2.37 Kg | 2.60 Kg | 3.67 Kg | 5.90 Kg | 8.60 Kg |
| CODE | | 013BS000001 | 013BS000002 | 013BS000003 | 013BS000004 | 013BS000005 |

(1) Fully charged battery at 25°C

(2) Reduction of capacity per month at 20°C (average)

Information subject to change without notice.



@salicru_en



www.linkedin.com/company/salicruen/