

Latitude 9430/Latitude 9430 2-in-1

Setup and Specifications

Notes, cautions, and warnings

 **NOTE:** A NOTE indicates important information that helps you make better use of your product.

 **CAUTION:** A CAUTION indicates either potential damage to hardware or loss of data and tells you how to avoid the problem.

 **WARNING:** A WARNING indicates a potential for property damage, personal injury, or death.

Contents

Chapter 1: Set up your Latitude 9430.....	4
Chapter 2: Chassis overview.....	6
Right.....	6
Left.....	6
Top.....	7
Display.....	8
Bottom.....	9
Service Tag.....	9
Modes.....	10
Battery charge and status light	12
Chapter 3: Specifications of Latitude 9430.....	13
Dimensions and weight.....	13
Processor.....	13
Chipset.....	14
Operating system.....	14
Memory.....	14
External ports.....	15
Internal slots.....	15
Wireless module.....	15
WWAN module.....	16
Audio.....	16
Storage.....	17
Media-card reader.....	17
Keyboard.....	17
Camera.....	18
Touchpad.....	19
Power adapter.....	19
Battery.....	20
Display.....	21
Fingerprint reader (optional).....	21
Sensor	22
GPU—Integrated.....	22
Multiple display support matrix.....	22
Hardware security.....	23
Operating and storage environment.....	23
Chapter 4: Keyboard shortcuts.....	24
Chapter 5: Getting help and contacting Dell.....	26

Set up your Latitude 9430

NOTE: The images in this document may differ from your computer depending on the configuration you ordered.

1. Connect the power adapter and press the power button.



NOTE: To conserve battery power, the battery might enter power saving mode. Connect the power adapter and press the power button to turn on the computer.

2. Finish operating system setup.

For Ubuntu:

Follow the on-screen instructions to complete the setup. For more information about installing and configuring Ubuntu, search in the Knowledge Base Resource at www.dell.com/support.

For Windows:

Follow the on-screen instructions to complete the setup. When setting up, Dell recommends that you:

- Connect to a network for Windows updates.

NOTE: If connecting to a secured wireless network, enter the password for the wireless network access when prompted.

- If connected to the internet, sign-in with or create a Microsoft account. If not connected to the internet, create an offline account.
- On the **Support and Protection** screen, enter your contact details.

3. Locate and use Dell apps from the Windows Start menu—Recommended.

Table 1. Locate Dell apps

Resources	Description
	Dell Product Registration Register your computer with Dell.
	Dell Help & Support Access help and support for your computer.
	SupportAssist SupportAssist is the smart technology that keeps your computer running at its best by optimizing settings, detecting issues, removing viruses and notifies when you need to make system updates. SupportAssist proactively checks the health of your system's hardware and software. When an issue is detected, the necessary system state information is sent to Dell to begin troubleshooting. SupportAssist is preinstalled on most of the Dell devices running Windows operating system. For more information, see SupportAssist for Home PCs User's Guide on www.dell.com/serviceabilitytools . NOTE: In SupportAssist, click the warranty expiry date to renew or upgrade your warranty.
	Dell Update Updates your computer with critical fixes and latest device drivers as they become available. For more information on using Dell Update, search in the Knowledge Base Resource at www.dell.com/support .
	Dell Digital Delivery Download software applications, which are purchased but not preinstalled on your computer. For more information on using Dell Digital Delivery, search in the Knowledge Base Resource at www.dell.com/support .

Chassis overview

Right



1. Antenna (WWAN only)
2. Air vents
3. USB 3.1 Gen 1 port with PowerShare

Left




1. Wedge-shaped lock slot
2. HDMI 2.0 port
3. Two Thunderbolt 4 ports with DisplayPort Alt Mode/USB4/Power Delivery
4. microSIM slot (WWAN only) change to microSD-card slot
5. microSD-card slot
6. Universal audio port
7. Antenna (WWAN only)

Top




1. Quad-array microphones
2. Power button with optional fingerprint reader
3. Right speaker
4. Touchpad
5. Left speaker

Display

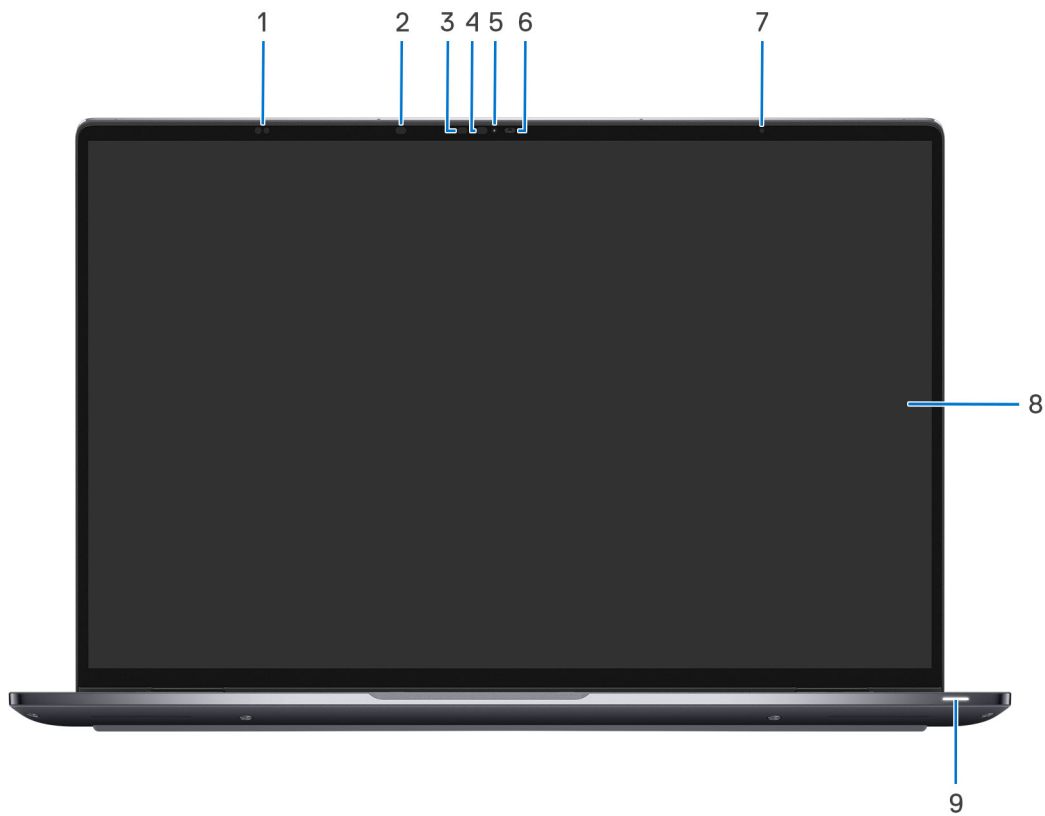

1. Proximity Sensors
2. IR LED
3. IR Camera light
4. IR LED
5. LED
6. Camera (RGB)
7. ALS
8. Display
9. Battery-status light/Diagnostic-status light

Bottom

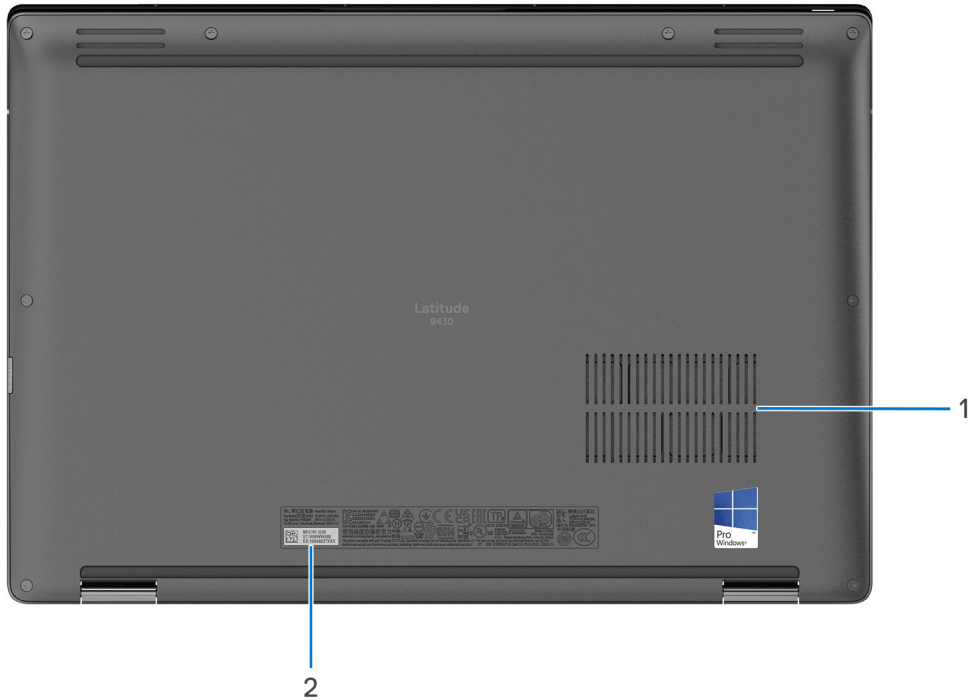

1. Air vents
2. Service tag label

Service Tag

The service tag is a unique alphanumeric identifier that allows Dell service technicians to identify the hardware components in your computer and access warranty information.



Modes

The following modes are applicable for your 2-in-1 computers.

Notebook



Tablet



Stand



Tent



Battery charge and status light

The following table lists the battery charge and status light behavior of your Latitude 9430.

Table 2. Battery charge and status light behavior

Power Source	LED Behavior	System Power State	Battery Charge Level
AC Adapter	Off	S0 - S5	Fully Charged
AC Adapter	Solid White	S0 - S5	< Fully Charged
Battery	Off	S0 - S5	11-100%
Battery	Solid Red (590+/-3 nm)	S0 - S5	< 10%

- S0 (ON) - System is turned on.
- S4 (Hibernate) - The system consumes the least power compared to all other sleep states. The system is almost at an OFF state, expect for a trickle power. The context data is written to hard drive.
- S5 (OFF) - The system is in a shutdown state.

Specifications of Latitude 9430

Dimensions and weight

The following table lists the height, width, depth, and weight of your Latitude 9430.

Table 3. Dimensions and weight

Description	Values
Height:	
Front height	8.46 mm (0.33 in.)
Rear height	13.94 mm (0.54 in.)
Width	310.59 mm (12.22 in.)
Depth	215.18 mm (8.47 in.)
Weight  NOTE: The weight of your computer depends on the configuration ordered and manufacturing variability.	- Laptop: 1.29 kg (2.84 lb) 2-in-1: 1.44 kg (3.17 lb)

Processor

The following table lists the details of the processors supported by your Latitude 9430.

Table 4. Processor

Description	Option one	Option two
Processor type	12 th Generation Intel Core i5-1245U	12 th Generation Intel Core i7-1265U
Processor wattage	15 W	15 W
Processor core count	10	10
Processor thread count	12	12
Processor speed	1.60 GHz to 4.40 GHz	1.80 GHz to 4.80 GHz
Processor cache	12 MB	12 MB
Integrated graphics	Intel Iris X ^e Graphics	Intel Iris X ^e Graphics

Chipset

The following table lists the details of the chipset supported by your Latitude 9430.

Table 5. Chipset

Description	Values
Chipset	Integrated with the processor
Processor	12 th Generation Intel Core i5/i7 vPro processors
DRAM bus width	64-bit
Flash EPROM	32 MB
PCIe bus	Up to Gen4

Operating system

Your Latitude 9430 supports the following operating systems:

- Windows 11 Home, 64-bit
- Windows 11 Pro, 64-bit
- Windows 10 Home, 64-bit
- Windows 11 Pro, 64-bit (downgrade to Windows 10)
- Ubuntu® 20.04 LTS, 64-bit

Memory

The following table lists the memory specifications of your Latitude 9430.

Table 6. Memory specifications

Description	Values
Memory slots	Integrated  NOTE: This is not upgradeable.
Memory type	LPDDR5
Memory speed	5200 MHz
Maximum memory configuration	32 GB
Minimum memory configuration	16 GB
Memory configurations supported	• 16 GB, LPDDR5, SDRAM, 5200MT/s, Dual channel, On-board • 32 GB, LPDDR5, SDRAM, 5200MT/s, Dual channel, On-board

External ports

The following table lists the external ports on your Latitude 9430.

Table 7. External ports

Description	Values
USB ports	- One USB 3.1 Gen 1 port with PowerShare - Two Thunderbolt 4 ports with DisplayPort Alt Mode/USB4/Power Delivery
Audio port	One universal audio port
Video port/ports	One HDMI 2.0 port
Media-card reader	One microSD-card slot
Power-adaptor port	Type-C power input  NOTE: The power port is one of the two onboard USB-C ports listed in the USB ports.
Security-cable slot	One wedge shaped lock slot

Internal slots

The following table lists the internal slots of your Latitude 9430.

Table 8. Internal slots

Description	Values
Integrated on the system board	On-board Wi-Fi and Bluetooth
M.2	- One M.2 3042 slot for WWAN - One M.2 2230 slot for solid-state drive (SSD)  NOTE: To learn more about the features of different types of M.2 cards, search in the Knowledge Base Resource at www.dell.com/support .

Wireless module

The following table lists the Wireless Local Area Network (WLAN) module supported on your Latitude 9430.

Table 9. Wireless module specifications

Description	Values
Model number	Intel AX211
Transfer rate	Up to 2400 Mbps
Frequency bands supported	2.4 GHz/5.0 GHz/6.0 GHz
Wireless standards	- WiFi 802.11a/b/g - Wi-Fi 4 (WiFi 802.11n) - Wi-Fi 5 (WiFi 802.11ac) - Wi-Fi 6E (WiFi 802.11ax)

Table 9. Wireless module specifications (continued)

Description	Values
Encryption	64-bit/128-bit WEP - AES-CCMP - TKIP
Bluetooth	Bluetooth 5.2
 NOTE: The wireless module is integrated and not upgradable or replaceable. The whole board needs to be replaced if defective.	

WWAN module

The following table lists the Wireless Wide Area Network (WWAN) module supported on your Latitude 9430.

Table 10. WWAN module specifications

Description	Option one	Option two
Model number	Qualcomm Snapdragon X20 Global Gigabite LTE	Qualcomm Snapdragon X55 Global Gigabite NR/LTE
Transfer rate	Up to 1 Gbps DL/150 Mbps UL (CAT 16)	Up to 3Gbps DL/250 Mbps UL (3GPP Release15 NR/LTE CAT 20)
Frequency bands supported	(1,2,3,4,5,7,8,12,13,14,17,18,19,20,25,26,28,29,30,32,38,39,40,41,42,43,46,66), HSPA+ (1, 2, 4, 5, 6, 8, 9, 19)	NR (1,2,3,5,7,8,12,20,28,38,41,66,71,77,78,79) LTE (1,2,3,4,5,7,8,12,13,14,17,18,19,20,25,26,28,29,30,32,34,38,39,40,41,42,46,48, 66) HSPA+ (1,2,4,5,6,8,9,19)

 **NOTE:** For instructions on how to find your computer's IMEI (International Mobile Station Equipment Identity) number, see the knowledge base article [000143678](https://www.dell.com/support/article/000143678) at www.dell.com/support.

Audio

The following table lists the audio specifications of your Latitude 9430.

Table 11. Audio specifications

Description	Values
Audio controller	Realtek ALC711-CG
Stereo conversion	Supported, 24-bit DAC (Digital-to-Analog) and ADC (Analog-to-Digital)
Internal audio interface	SoundWire interface
External audio interface	Universal audio jack
Number of speakers	Four
Internal-speaker amplifier	Realtek ALC1319D

Table 11. Audio specifications (continued)

Description		Values
External volume controls		Keyboard shortcut controls
Speaker output:		
	Average speaker output	8 W
	Peak speaker output	10 W
Subwoofer output		Supported
Microphone		Quad-array microphone

Storage

This section lists the storage options on your Latitude 9430.

Your computer supports M.2 2230 solid-state drive:

- One M.2 2230 solid-state drive

Table 12. Storage specifications

Storage type	Interface type	Capacity
M.2 2230, Class 35 solid-state drive	PCIe NVMe Gen4 x4	Up to 1 TB
M.2 2230, Class 35 solid-state drive, Self-encrypting drive	PCIe NVMe Gen4 x4	256 GB

Media-card reader

The following table lists the media cards supported by your Latitude 9430.

Table 13. Media-card reader specifications

Description	Values
Media-card type	One microSD-card slot
Media-cards supported	• micro-Secure Digital (mSD) • micro-Secure Digital High Capacity (mSDHC) • micro-Secure Digital Extended Capacity (mSDXC)
 NOTE: The maximum capacity supported by the media-card reader varies depending on the standard of the media card installed in your computer.	

Keyboard

The following table lists the keyboard specifications of your Latitude 9430.

Table 14. Keyboard specifications

Description	Values
Keyboard type	Backlit keyboard

Table 14. Keyboard specifications (continued)

Description	Values
Keyboard layout	QWERTY
Number of keys	• United States and Canada: 79 keys • United Kingdom: 80 keys • Japan: 83 keys
Keyboard size	X=19.05 mm key pitch Y=18.05 mm key pitch
Keyboard shortcuts	Some keys on your keyboard have two symbols on them. These keys can be used to type alternate characters or to perform secondary functions. To type the alternate character, press Shift and the desired key. To perform secondary functions, press Fn and the desired key.  NOTE: You can define the primary behavior of the function keys (F1–F12) changing Function Key Behavior in BIOS setup program. Keyboard shortcuts

Camera

The following table lists the camera specifications of your Latitude 9430.

Table 15. Camera specifications

Description	Values
Number of cameras	One
Camera type	FHD RGB Infrared camera
Camera location	Front camera
Camera sensor type	CMOS-sensor technology
Camera resolution:	
Still image	0.92 megapixel
Video	1920 x 1080 (FHD) at 30 fps
Infrared camera resolution:	
Still image	0.23 megapixel
Video	640 x 360 at 15 fps
Diagonal viewing angle:	
Camera	78 degrees
Infrared camera	78 degrees

Touchpad

The following table lists the touchpad specifications of your Latitude 9430.

Table 16. Touchpad specifications

Description		Values
Touchpad resolution:		>=300dpi
Touchpad dimensions:		
	Horizontal	116 mm (4.56 in.)
	Vertical	72 mm (2.83 in.)
Touchpad gestures		For more information about touchpad gestures available on Windows, see the Microsoft knowledge base article 4027871 at support.microsoft.com .

Power adapter

The following table lists the power adapter specifications of your Latitude 9430.

Table 17. Power adapter specifications

Description	Option one	Option two	Option three
Type	60 W AC adapter, USB-C	65 W AC adapter, USB-C	90 W AC adapter, USB-C
Input voltage	100 VAC—240 VAC	100 VAC—240 VAC	100 VAC—240 VAC
Input frequency	50 Hz—60 Hz	50 Hz—60 Hz	50 Hz—60 Hz
Input current (maximum)	1.70 A	1.70 A	1.50 A
Output current (continuous)	20 V/3 A (Continuous) 15 V/3 A (Continuous) 9.0 V/3 A (Continuous) 5.0 V/3 A (Continuous)	20 V/3.25 A (Continuous) 15 V/3 A (Continuous) 9.0 V/3 A (Continuous) 5.0 V/3 A (Continuous)	20 V/4.5 A (Continuous) 15 V/3 A (Continuous) 9.0 V/3 A (Continuous) 5.0 V/3 A (Continuous)
Rated output voltage	20 VDC/15 VDC/9 VDC/5 VDC	20 VDC/15 VDC/9 VDC/5 VDC	20 VDC/15 VDC/9 VDC/5 VDC
Temperature range:			
Operating	0 °C to 40 °C (32 °F to 104 °F)	0 °C to 40 °C (32 °F to 104 °F)	0 °C to 40 °C (32 °F to 104 °F)
Storage	-40 °C to 70 °C (-40 °F to 158 °F)	-40 °C to 70 °C (-40 °F to 158 °F)	-40 °C to 70 °C (-40 °F to 158 °F)
CAUTION: Operating and storage temperature ranges may differ among components, so operating or storing the device outside these ranges may impact the performance of specific components.			

Battery

The following table lists the battery specifications of your Latitude 9430.

Table 18. Battery specifications

Description		Option one	Option two
Battery type		2-cell, 39.7 WHr, ExpressChargeBoost	3-cell, 59.6 WHr, ExpressChargeBoost
Battery voltage		7.70 VDC	11.40 VDC
Battery weight (maximum)		0.19 kg (0.41 lb)	0.26 kg (0.57 lb)
Battery dimensions:			
	Height	250.70 mm (9.87 in.)	250.70 mm (9.87 in.)
	Width	89.18 mm (3.50 in.)	89.18 mm (3.50 in.)
	Depth	6.17 mm (0.24 in.)	6.17 mm (0.24 in.)
Temperature range:			
	Operating	- Charge: 0 °C to 50 °C (32 °F to 122 °F) - Discharge: 0°C to 70°C (32°F to 158°F)	- Charge: 0 °C to 50 °C (32 °F to 122 °F) - Discharge: 0°C to 70°C (32°F to 158°F)
	Storage	-20 °C to 60 °C (-4 °F to 140 °F)	-20 °C to 60 °C (-4 °F to 140 °F)
Battery operating time		Varies depending on operating conditions and can significantly reduce under certain power-intensive conditions.	Varies depending on operating conditions and can significantly reduce under certain power-intensive conditions.
Battery charging time (approximate)  NOTE: Control the charging time, duration, start and end time, and so on using the Dell Power Manager application. For more information on the Dell Power Manager see, <i>Me and My Dell</i> on www.dell.com .		4 hours (when the computer is off)	4 hours (when the computer is off)
Coin-cell battery		Not supported	Not supported
 CAUTION: Operating and storage temperature ranges may differ among components, so operating or storing the device outside these ranges may impact the performance of specific components.			
 CAUTION: Dell recommends that you charge the battery regularly for optimal power consumption. If your battery charge is completely depleted, connect the power adapter, turn on your computer, and then restart your computer to reduce the power consumption.			

Display

The following table lists the display specifications of your Latitude 9430.

Table 19. Display specifications

Description		Option one	Option two
Display type		14-inch, Full High Definition (FHD+)	14-inch, Quad High Definition (QHD+)
Touch options		No	Yes
Display-panel technology		Low blue light (LBL)	Low blue light (LBL)
Display-panel dimensions (active area):			
	Height	188.49 mm (7.42 in.)	188.49 mm (7.42 in.)
	Width	301.59 mm (11.87 in.)	301.59 mm (11.87 in.)
	Diagonal	355.64 mm (14.00 in.)	355.64 mm (14.00 in.)
Display-panel native resolution		1920 x 1200	2560 x 1600
Luminance (typical)		500 nits	500 nits
Megapixels		2.30	4.09
Color gamut		sRGB 100%	sRGB 100%
Pixels Per Inch (PPI)		161	216
Contrast ratio (min.)		1200	1000
Response time (max.)		35 ms	35 ms
Refresh rate		60 Hz	60 Hz
Horizontal view angle		88 degree	88 degree
Vertical view angle		88 degree	88 degree
Pixel pitch		0.1572 mm	0.1178 mm
Power consumption (maximum)		2.85 W	3.70 W
Anti-glare vs glossy finish		Anti-glare	Anti-reflection, Anti-smudge

Fingerprint reader (optional)

The following table lists the specifications of the optional fingerprint-reader of your Latitude 9430.

Table 20. Fingerprint reader specifications

Description	Values
Fingerprint-reader sensor technology	Trans-capacitive sensing
Fingerprint-reader sensor resolution	500 dpi

Table 20. Fingerprint reader specifications (continued)

Description	Values
Fingerprint-reader sensor pixel size	108 x 88

Sensor

The following table lists the sensor of your Latitude 9430.

Table 21. Sensor

Sensor support
Gyroscope
eCompass/Magnetometer (supported by Latitude 9430 2-in-1 only)
Accelerometer
GPS (via WWAN Card only)
Ambient Light Sensor
Adaptive Thermal Performance (via Gyroscope/Accelerometer)
Dell ExpressSign-In 1.0 (via Proximity Sensor)
Dell ExpressSign-in 2.0 (via Intel Camera Sensing Technology)
Wake/Power on with lid open

GPU—Integrated

The following table lists the specifications of the integrated Graphics Processing Unit (GPU) supported by your Latitude 9430.

Table 22. GPU—Integrated

Controller	External display support	Memory size	Processor
Intel Iris X ^e Graphics	HDMI 2.0, DisplayPort over USB Type-C	Shared system memory	12 th Generation Intel Core i5/i7 vPro Processors

Multiple display support matrix

The following table lists the multiple display support matrix of your Latitude 9430.

Table 23. Multiple display support matrix

Graphics Card	Supported external displays with computer internal display on	Supported external displays with computer internal display off
Integrated GPU	Up to 3	Up to 4

Hardware security

The following table lists the hardware security of your Latitude 9430.

Table 24. Hardware security

NIST 800-147 protocol
Trusted Platform Module (TPM) 2.0 FIPS-140-2 Certified/TCG Certified
Touch Fingerprint Reader (in Power Button) with Control Vault 3.0 Advanced Authentication with FIPS 140-2 Level 2 Certification (Optional)
Face IR camera (Windows Hello compliant) with ExpressSign-in 1.0 (Proximity Sensor)
Face IR camera (Windows Hello compliant) with ExpressSign-in 2.0 (Camera Sensing) (Optional)
Intel vPro Technology (iAMT 12) (optional, requires Intel WiFi Link WLAN and a vPro compatible processor)
Dell Client Command Suite available (dell.com/command), Factory Installed Dell Client Command Update, Dell Command Power Manager
Intel Platform Trust Technology
Chassis wedge-shaped security lock

Operating and storage environment

This table lists the operating and storage specifications of your Latitude 9430.

Airborne contaminant level: G1 as defined by ISA-S71.04-1985

Table 25. Computer environment

Description	Operating	Storage
Temperature range	0°C to 40°C (32°F to 104°F)	-40°C to 60°C (-40°F to 140°F)
Relative humidity (maximum)	10% to 90% (non-condensing)	0% to 95% (non-condensing)
Vibration (maximum)*	0.66 GRMS	1.30 GRMS
Shock (maximum)	140 G†	160 G†
Altitude range	-15.2 m to 3048 m (-50 ft to 10000 ft)	-15.2 m to 10668 m (-50 ft to 35000 ft)
 CAUTION: Operating and storage temperature ranges may differ among components, so operating or storing the device outside these ranges may impact the performance of specific components.		

* Measured using a random vibration spectrum that simulates user environment.

† Measured using a 2 ms half-sine pulse.

Keyboard shortcuts

 **NOTE:** Keyboard characters may differ depending on the keyboard language configuration. Keys used for shortcuts remain the same across all language configurations.

Some keys on your keyboard have two symbols on them. These keys can be used to type alternate characters or to perform secondary functions. The symbol shown on the lower part of the key refers to the character that is typed out when the key is pressed. If you press shift and the key, the symbol shown on the upper part of the key is typed out. For example, if you press **2**, **2** is typed out; if you press **Shift + 2**, **@** is typed out.

The keys F1-F12 at the top row of the keyboard are function keys for multi-media control, as indicated by the icon at the bottom of the key. Press the function key to invoke the task represented by the icon. For example, pressing F1 mutes the audio (refer to the table below).

However, if the function keys F1-F12 are needed for specific software applications, multi-media functionality can be disabled by pressing **Fn + Esc**. Subsequently, multi-media control can be invoked by pressing **Fn** and the respective function key. For example, mute audio by pressing **Fn + F1**.

 **NOTE:** You can also define the primary behavior of the function keys (F1–F12) by changing **Function Key Behavior** in BIOS setup program.

Table 26. List of keyboard shortcuts

Function key	Primary behavior	Function key	Secondary behavior
F1	Mute audio	Fn + F1	Operating system and application specific F1 behavior
F2	Decrease volume	Fn + F2	Operating system and application specific F2 behavior
F3	Increase volume	Fn + F3	Operating system and application specific F3 behavior
F4	Mic Mute	Fn + F4	Operating system and application specific F4 behavior
F5	Keyboard backlight  NOTE: Not applicable for non-backlight keyboard.	Fn + F5	Operating system and application specific F5 behavior
F6	Decrease screen brightness	Fn + F6	Operating system and application specific F6 behavior
F7	Increase screen brightness		Operating system and application specific F7 behavior
F8	Switch to external display	Fn + F8	Operating system and application specific F8 behavior
F9	Disable camera	Fn + F9	Operating system and application specific F9 behavior

Table 26. List of keyboard shortcuts (continued)

Function key	Primary behavior	Function key	Secondary behavior
F10	Print Screen	Fn + F10	Operating system and application specific F10 behavior
F11	Home	Fn + F11	Operating system and application specific F11 behavior
F12	End	Fn + F12	Operating system and application specific F12 behavior

The **Fn** key is also used with selected keys on the keyboard to invoke other secondary functions.

Table 27. Secondary behavior

Function key	Behavior
Fn + Esc	Toggle Fn-key lock
Fn + PrtScr	Turn off/on wireless
Fn + B	Pause/Break
Fn + Insert	Sleep
Fn + S	Toggle scroll lock
Fn + H	Toggle between power and battery-status light/hard-drive activity light
Fn + R	System request
Fn + Ctrl	Open application menu
Fn + PgUp	Page up
Fn + PgDn	Page down
Fn + Home	Home
Fn + End	End

Getting help and contacting Dell

Self-help resources

You can get information and help on Dell products and services using these self-help resources:

Table 28. Self-help resources

Self-help resources	Resource location
Information about Dell products and services	www.dell.com
My Dell app	
Tips	
Contact Support	In Windows search, type <code>Contact Support</code> , and press Enter.
Online help for operating system	www.dell.com/support/windows
Access top solutions, diagnostics, drivers and downloads, and learn more about your computer through videos, manuals and documents.	Your Dell computer is uniquely identified by a Service Tag or Express Service Code. To view relevant support resources for your Dell computer, enter the Service Tag or Express Service Code at www.dell.com/support. For more information on how to find the Service Tag for your computer, see Locate the Service Tag on your computer.
Dell knowledge base articles for a variety of computer concerns	1. Go to www.dell.com/support. 2. On the menu bar at the top of the Support page, select Support > Knowledge Base. 3. In the Search field on the Knowledge Base page, type the keyword, topic, or model number, and then click or tap the search icon to view the related articles.

Contacting Dell

To contact Dell for sales, technical support, or customer service issues, see www.dell.com/contactdell.

 **NOTE:** Availability varies by country/region and product, and some services may not be available in your country/region.

 **NOTE:** If you do not have an active Internet connection, you can find contact information about your purchase invoice, packing slip, bill, or Dell product catalog.