


T34w-30 Simplified service manual for dismantling

Model Name: ThinkVision T34w-30



Exploded Diagram

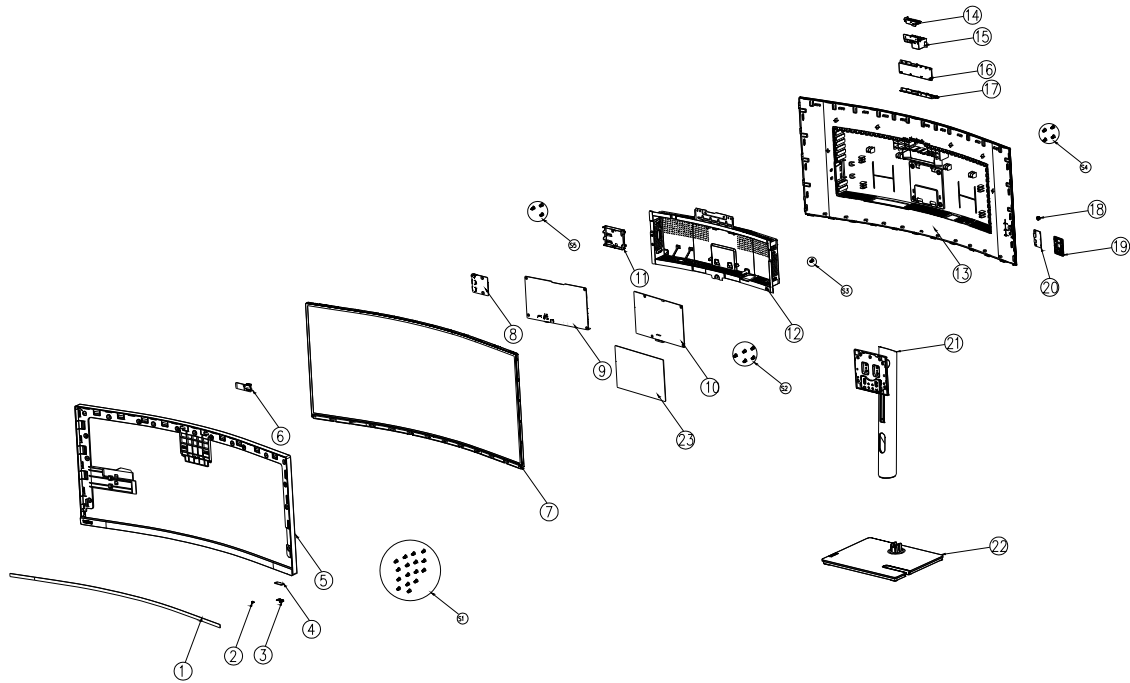

1. Precaution




Please read the precaution as follows to prevent any damages to the LCD Monitor.

Make sure all power connector is removed. Be sure that the LCD Monitor is in power off status.


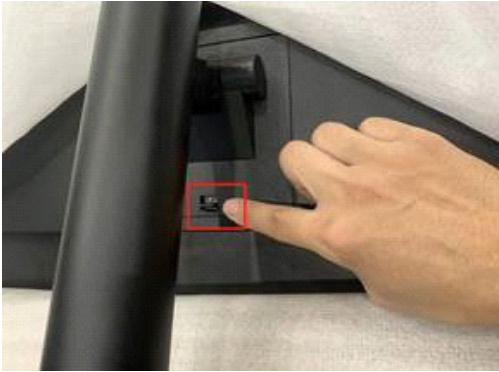

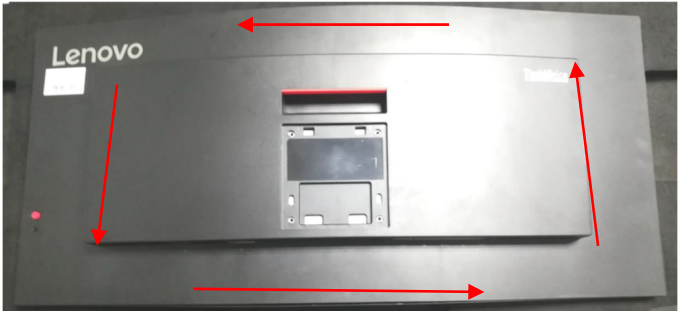
<p>Prepare soft cloth and sponge as working platform to place LCD monitor horizontally.</p>	
<p>Hold LCD by the side carefully and DON'T touch or press panel directly.</p>	

2. Appropriate tools


Select the Appropriate tools for disassembly and re-assembly.

Phillips screwdriver (#2)	
spacer screwdriver	
C/D disassembly tool	
Gloves or soft cloth	


3. Disassembly SOP

<p>Put the monitor on a flat surface</p>	
<p>Push the button to remove the stand-base assy.</p>	
<p>Remove the screw * 4pcs Tool : Screwdriver #2</p>	
<p>Use the C/D disassembly tool to release Rear cover hook.</p>	

Disconnect pins to remove the rear cover.

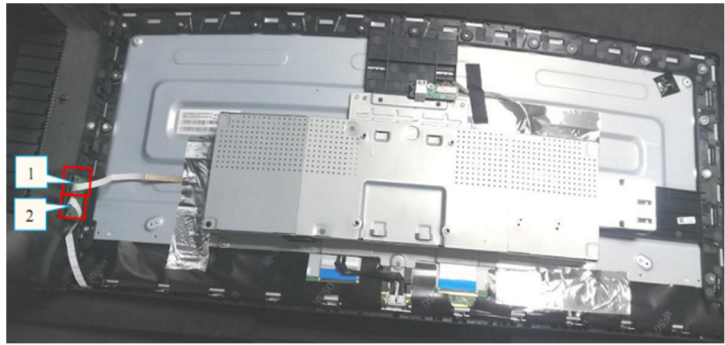


Take off the tapes

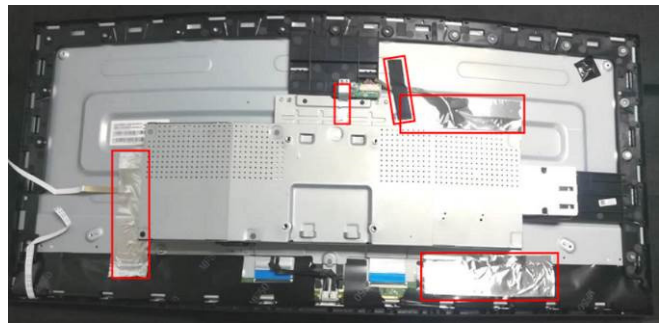

Remove the screw*3 pcs
Tool: Screwdriver #2
Disconnect pin



Disconnect the connectors to
remove the USB board and the
Audio board.


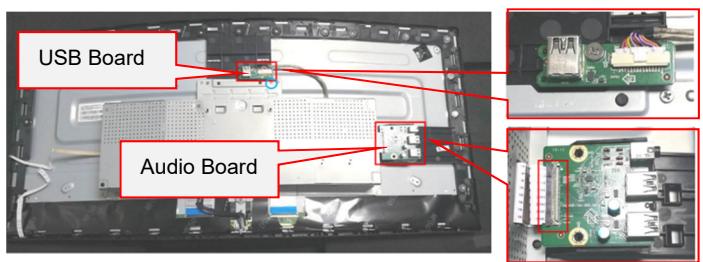


Remove the screw*6 pcs to
remove the mainframe.

Tool: Screwdriver #2





Take off the tapes and remove the Mylar. Disconnect the pin.

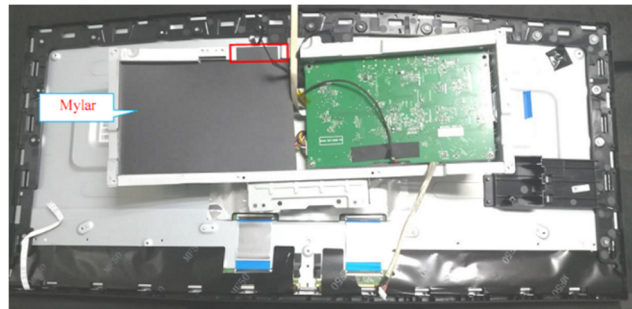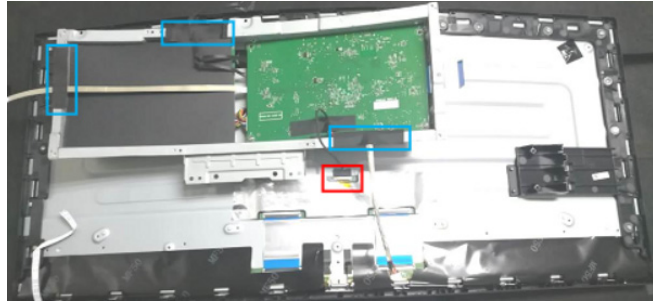




Take off the tape and remove All screws.

Tool : Screwdriver #2

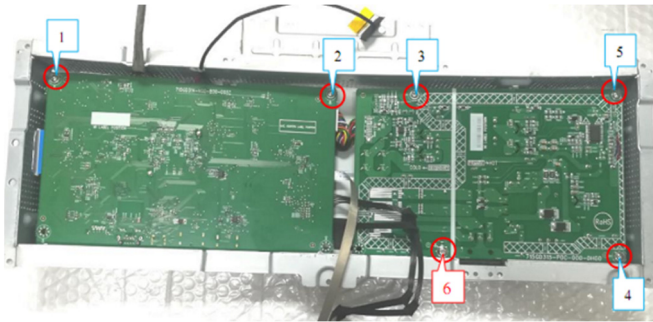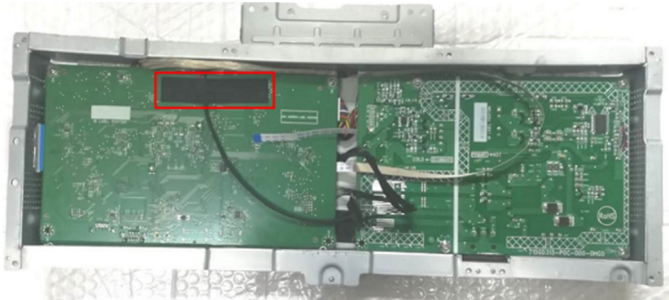


Disconnect all the pins

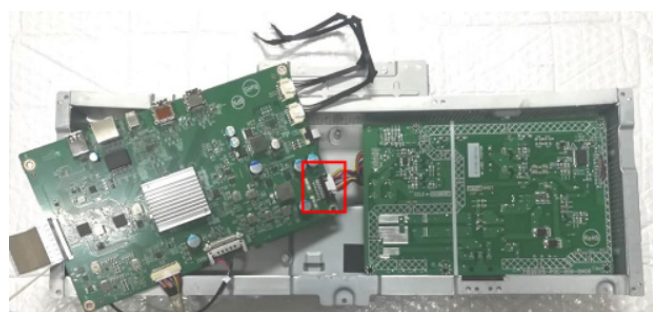


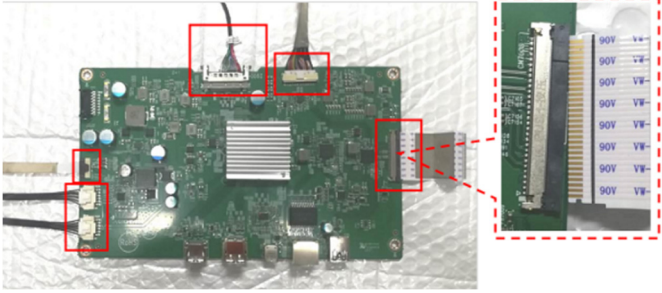


The main frame

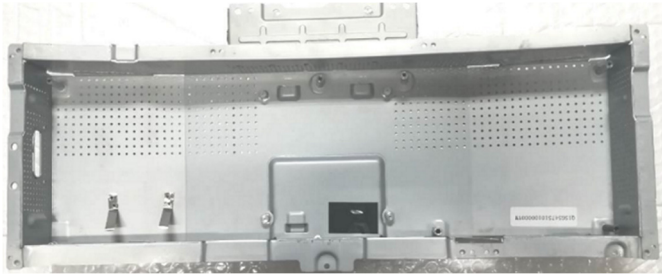

Remove the screw*11pcs
Tool: Screwdriver #2

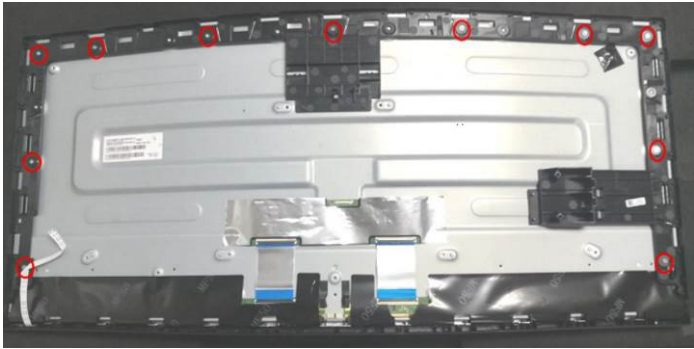


Remove the LED board

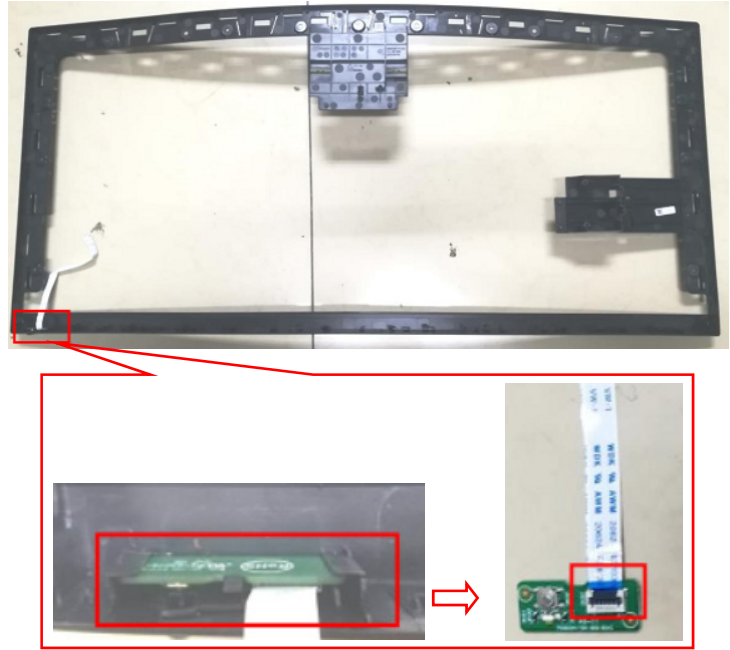


The panel




Take out key board

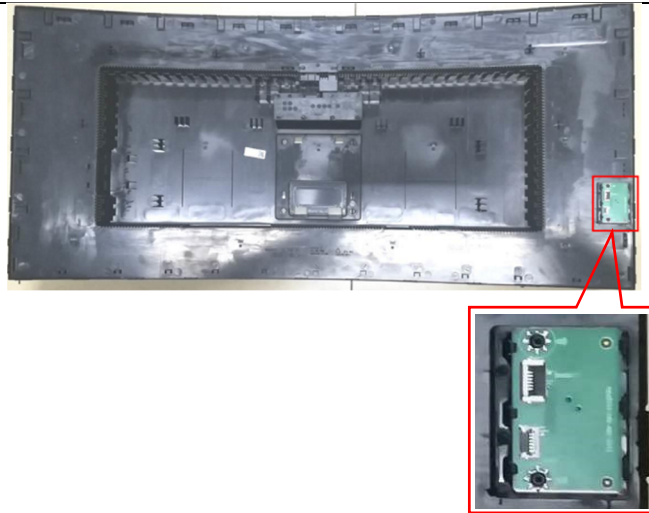

Disassemble the key

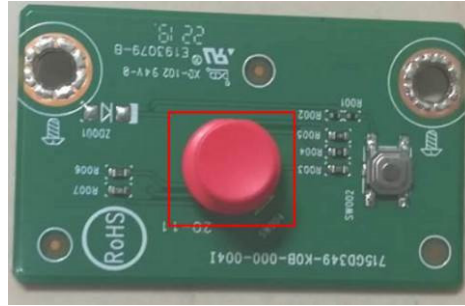

The Rear Cover

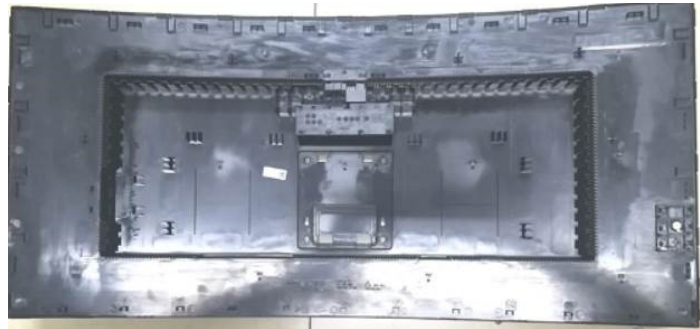

The Bezel

