

MPG Series

OLED Monitor

MPG 341CQPX QD-OLED (3DD0)

User Guide

Contents

Getting Started	3
Package Contents	3
Installing the Monitor Stand	4
Adjusting the Monitor	5
Monitor Overview	6
Connecting the Monitor to PC	9
OSD Setup	10
Navi Key	10
Hot Key	10
OSD Menus	11
G.I	12
Gaming	13
Professional	14
Image	15
Input Source	16
PIP/PBP	17
Navi Key	18
Settings	18
MSI OLED Care	19
Specifications	22
Preset Display Modes	24
Troubleshooting	28
Safety Instructions	29
TÜV Rheinland Certification	31
Regulatory Notices	32

Revision

V1.1, 2024/10

Getting Started

This chapter provides you with the information on hardware setup procedures. While connecting devices, be careful in holding the devices and use a grounded wrist strap to avoid static electricity.

Package Contents

Monitor	MPG 341CQPX QD-OLED			
Documentation	Quick Start Guide			
	Stand			
Accessories	Stand Base with Screw(s)			
Accessories	Screw(s) for Wall Mount Bracket(s)			
	Power Cord			
	Ultra High Speed HDMI™ Cable (Optional)			
Cables	DisplayPort Cable (Optional)			
	USB Upstream Cable (Optional) (for USB Type-B Upstream Port)			




/ Important

- Contact your place of purchase or local distributor if any of the items is damaged or missing.
- Package contents may vary by country and model.
- The included power cord is exclusively for this monitor and should not be used with other products.

Installing the Monitor Stand

- 1. Leave the monitor in its protective packaging. Align the stand to the monitor groove.
- 2. Push the stand towards the monitor groove until it locks in place.
- 3. Connect the base to the stand and tighten the base screws to secure the base.
- Make sure the stand assembly is properly installed before setting the monitor upright.

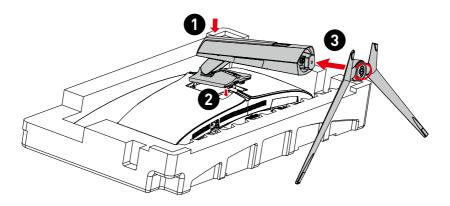



Important


- Place the monitor on a soft, protected surface to avoid scratching the display panel.
- Do not use any sharp objects on the panel.
- The groove for installing the stand bracket can also be used for wall mount. Please contact your dealer for proper wall mount kit.

Adjusting the Monitor

This monitor is designed to maximize your viewing comfort with its adjustment capabilities.




• Avoid touching the display panel when adjusting the monitor.

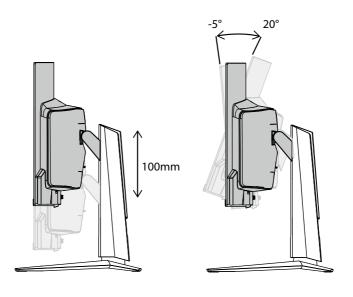



Monitor Overview

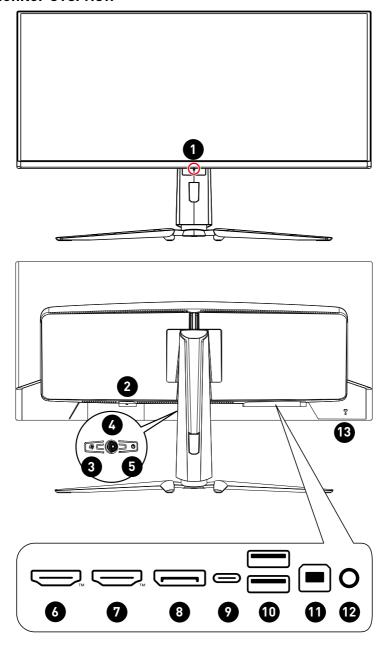

1 Power LED

Lit in white after the monitor is turned on. If no signal input, the LED will turn into orange. Lit in orange when the monitor is in Stand-by mode.

2 Power Jack

Macro Key

To activate OSD Application.

4 Navi Key

5 Power Button

HDMITM Connector HIGH-DEFINITION MULTIMEDIA INTERFACE

Supports HDMI™ CEC, 3440x1440@240Hz as specified in HDMI™ 2.1.



Important

To ensure optimal performance and compatibility, please use only $HDMI^{TM}$ cables certified with the official $HDMI^{TM}$ logo when connecting this monitor. For more information, please visit $\frac{https://www.hdmi.org/resource/cables}{https://www.hdmi.org/resource/cables}$.

HDMITM Connector HIGH-DEFINITION MULTIMEDIA INTERFACE

Supports 3440x1440@240Hz as specified in HDMI™ 2.1.



Important

To ensure optimal performance and compatibility, please use only $HDMI^{TM}$ cables certified with the official $HDMI^{TM}$ logo when connecting this monitor. For more information, please visit $\frac{https://www.hdmi.org/resource/cables}{https://www.hdmi.org/resource/cables}$.

BisplayPort
Supports 3440x1440@240Hz as specified in DisplayPort 1.4.

USB Type-C Port

This port supports DisplayPort Alternate (DP Alt) Mode and up to 20V/4.9A (98W) power delivery.



Important

Your USB-C signal source and cable must support DisplayPort Alternate Mode to enable video output to the monitor USB Type-C Power Delivery

5V / 3A

9V / 3A

12V / 3A


15V / 3A

20V / 4.9A

10	USB 2.0 Type-A Port	
10	USB 2.0 Type-B Upstream Port For USB Upstream Cable. Important Check the package for USB Upstream Cable and connect it to the PC and monitor. Once this cable is connected, the USB Type-A Downstream Ports on the monitor will be ready for use.	To Monitor To PC
12	Headphone Jack	
13	Kensington Lock	


Connecting the Monitor to PC

- 1. Turn off your computer.
- 2. Connect the video cable from the monitor to your computer.
- **3.** Connect the power cord to the monitor power jack. (Figure A)
- 4. Plug the power cord into the electrical outlet. (Figure B)
- **5.** Turn on the monitor. (Figure C)
- **6.** Power on the computer and the monitor will auto detect the signal source.

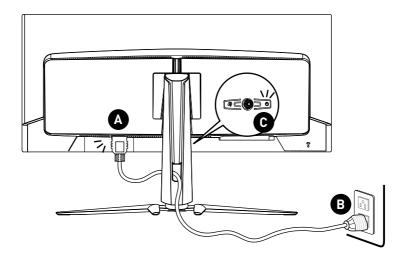



For optimal performance, please remove the protective film from the display panel before use.

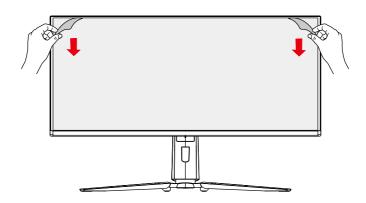

OSD Setup

This chapter provides you with essential information on OSD Setup.




Important

All information is subject to change without prior notice.

Navi Key

The monitor comes with a Navi Key, a multi-directional control that helps navigate the On-Screen Display (OSD) menu.

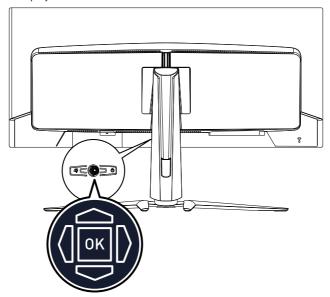

Up/Down/Left/Right:

- selecting function menus and items
- adjusting function values
- entering into/exiting from function menus


Press (OK):

- launching the On-Screen Display (OSD)
- entering submenus
- confirming a selection or setting

Hot Key

- Users may enter into preset function menus by moving the Navi Key up, down, left or right when the OSD menu is inactive.
- Users may customize their own Hot Keys to enter into different function menus.

OSD Menus

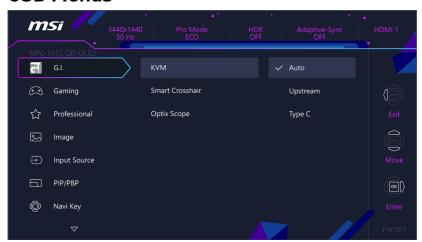



The following settings will be grayed out when HDR signals are received:

- Night Vision
- Low Blue Light
- Brightness
- Contrast

- Color Temperature
- Optix Scope
- PIP/PBP
- Al Vision

<u>G.I.</u>

1st Level Menu	2nd/3rd Level Menu		Description	
KVM	Auto Upstream		Auto allows the monito between USB input sou mice or other USB devi	ırces, such as keyboards,
	Type C		Users can also designa Type-C as the only USE	ite Upstream port or USB 3 signal source.
Smart Crosshair	Icon	None	Through AI algorithm, the visibility of in-game Users can select the cocrosshair.	e crosshair.
	Color	White		
		Red		
	Desiries	Auto		
	Position Reset			
Optix Scope	Scope Size	Small	The center point will zo	
		Medium	is enabled, user can ad the "Scope Size" and "S	ljust the details through Scope Ratio" settings.
	Scope Ratio	x1.5	Smart Crosshair and 0	ptix Scope can be
	x2		enabled at the same time. • Activating Optix Scope will affect:	
		x3	Affected Function	Function Status
	OFF ON		» Adaptive-Sync » PIP/PBP	Set to OFF
			» Screen Size 1:1	Set to Auto

Gaming

1st Level Menu	2nd/3rd Level Menu		Description	
Game Mode	Premium Color		Use Up or Down Button to select and preview	
	User		mode effects.	
	FPS		Press the OK Button to confirm and apply your mode type.	
	Racing			
	RTS			
	RPG			
Night Vision	OFF		This function optimizes background brightness	
	Normal		and is recommended for FPS games.	
	Strong			
	Strongest			
	A.I.			
Al Vision	OFF		Al Vision enhances image quality by optimizing	
	ON		the contrast of images and background brightness.	
			Activating Al Vision will affect:	
			Affected Function Function Status	
			» Night Vision Unable to select	
Refresh Rate	Location	Left Top	Location is adjustable in OSD Menu. Press the	
		Right Top	OK Button to confirm and apply your Refresh Rate Location.	
		Left Bottom	This monitor follows and works at the Operating	
		Right Bottom	System's preset Screen Refresh Rate.	
		Customize		
	OFF			
	ON			
Alarm Clock	Location	Left Top	After setting the time, press the OK Button to	
		Right Top	activate the timer. • Users have to manually restore their preset	
		Left Bottom	Alarm Clock after any AC power loss and	
	Right Botton Customize		reconnection.	
	OFF			
	15:00	00:01 ~ 99:59		
	30:00			
	45:00			
	60:00			

1st Level Menu	2nd/3rd Level Menu	Description
Adaptive-Sync	OFF ON	Adaptive-Sync prevents screen tearing. Activating Adaptive-Sync will affect:
		Affected Function Function Status » PIP/PBP » Optix Scope » Screen Size 1:1/24.5"/27" Set to Auto
DSC	OFF ON	Users can toggle DSC (Display Stream Compression) on/off. For more DSC timing information, please check Preset Display Modes for DSC On/Off timing tables. Activating DSC will affect:
		Affected Function Function Status PIP/PBP Unable to select
НДМІ™ 2.1	PC PC	To reach resolution of 2160P@30Hz/60Hz/120Hz, user have to set HDMI™ 2.1 to Console.

Professional

1st Level Menu	2nd Level Menu	Description
Pro Mode	Eco	Use Up or Down Button to select and preview mode effects.
	User	Press the OK Button to confirm and apply your mode
	Anti-Blue	type. The default setting "Eco" mode meets the
	Movie	requirements of TÜV Rheinland's "Low Blue Light" standard and Eyesafe certification.
	Office	Activating sRGB, Adobe RGB, Display P3 will affect:
	sRGB	Affected Function Function Status
	SKOD	» Color Temperature
	Adobe RGB	» Low Blue Light Unable to select
	Display P3	» Contrast

1st Level Menu	2nd Level Menu	Description
Low Blue Light	OFF	Low Blue Light protects your eyes against blue light.
	ON	When enabled, Low Blue Light adjusts the screen color temperature to a more yellow glow.
		When Pro Mode is set to Anti-Blue, it is mandatory to enable Low Blue Light.
		This monitor is a Low Blue Light backlight monitor, it would decrease the blue light emitted without adjusting OSD function.
Image Enhancement	OFF	Image Enhancement enhances image edges to improve
	Weak	their acutance.
	Medium	
	Strong	
	Strongest	

Image

1st Level Menu	2nd/3rd Level Menu		De	Description	
Brightness	0-100		Properly adjust Brightness according to the surrounding lighting.		
Contrast	0-100		• 1	Properly adjust Contras	t to relax your eyes.
Sharpness	0-5		Sharpness improves clarity and details of images.		rity and details of
Color Temperature	Cool			Jse Up or Down Button	to select and preview
	Normal			mode effects.	confirm and apply your
	Warm		 Press the OK Button to confirm and apply your mode type. 		
	Customization	R (0-100)		Jsers can adjust Color	Temperature in
		G (0-100)] '	Customization mode.	
	B (0-100)		1		
Screen Size	Auto		Users can adjust Screen Size in any mode, as		
	4:3		resolution and any screen refresh rate.		
	16:9	,	• /	Activating Screen Size 1	
	21:9		1	Affected Function	Function Status
	1:1	-	- I,		
				Set to OFF	
	24.5"			» Optix Scope	
	27"				
DisplayHDR	True Black 400		Users can set the DisplayHDR to True Black		ayHDR to True Black
Peak 1000 nits		400 or Peak 1000 nits.			

Input Source

1st Level Menu	2nd Level Menu	Description
HDMI™ 1		Users can adjust Input Source in any mode.
HDMI™ 2		
DP		
Туре С		
Auto Scan	OFF	Users can use the Navi Key to select Input Source at
	ON	below status: While "Auto Scan" is set to "OFF" with the monitor at power saving mode; While "No Signal" message box is shown on the monitor.

PIP/PBP

1st Level Menu	2nd/3rd Level Menu		D	escription		
OFF	OFF		•	PIP (Picture in Picture) allows users to		
PIP	Source	HDMI™ 1	one screen. Une program is displayed o			
		HDMI™ 2				
		DP].			
		Type C	PBP (Picture by Picture) is a similar fe displays two input sources side-by-sid			
	PIP Size	Small	١.	screen. Display Switch allows use	rs to switch hatwaan	
		Medium		primary and secondary in		
		Large	•	If there is only one signal and Audio Switch will be o		
	Location	Left Top		Users can adjust the ratio		
		Right Top		switching Mode 1/2/Cust	omize.	
		Left Bottom	•	Activating PIP/PBP will af		
		Right Bottom	Right Bottom » Adaptive-Sy	Affected Function	Function Status	
		Customize		» Optix Scope	Set to OFF	
	Display Swi	tch		» DisplayHDR	Unable to select	
	Audio Switc	h		» HDMI™ 2.1	Unable to select	
PBP	Mode 1			» HDMI™ CEC	Set to OFF & unable to select	
	Mode 2		» PIP: Screen Size 1:1 Set to Auto 8	Set to Auto &		
	Customize			» PBP: Screen Size	unable to select	
	Source 1	HDMI™ 1		» PIP: Screen Size	Set to Auto	
		HDMI™ 2		24.5"/27"	Set to Auto	
		DP				
		Type C				
	Source 2	HDMI™ 1				
		HDMI™ 2				
		DP				
		Type C				
	Display Switch Audio Switch					

Navi Key

1st Level Menu	2nd Level Menu	Description
Up	OFF	All Navi Key items can be adjusted via OSD Menus.
Down	Brightness	
Left	Game Mode	
Right	Smart Crosshair	
	Alarm Clock	
	Input Source	
	PIP/PBP Mode	
	Refresh Rate	
	Info. On Screen	
	Night Vision	
	Optix Scope	
	KVM	

Settings

1st Level Menu	2nd Level Menu	Description				
Language	繁體中文	Users have to press the OK Button to confirm and				
	English	 apply the Language setting. Language is an independent setting. Users' own 				
	Français	language setting will override the factory default.				
	Deutsch	When users set Reset to Yes, Language will not be changed.				
	Italiano					
	Español					
	한국어					
	日本語					
	Русский					
	Português					
	简体中文					
	Bahasa Indonesia					
	Türkçe					
	(More languages coming soon)					
Transparency	0~5	Users can adjust Transparency in any mode.				
OSD Time Out	5~30s	Users can adjust OSD Time Out in any mode.				
Power Button	OFF	When set to OFF, users can press the power button to turn off the monitor.				
	Standby	When set to Standby, users can press the power button to turn off the panel and backlight.				

1st Level Menu	2nd Level Menu	Description
Info. On Screen	OFF	The information of the monitor status will be shown
	ON	on the right side of the screen.
HDMI™ CEC	OFF	HDMI™ CEC (Consumer Electronics Control) supports Sony PlayStation®, Nintendo® Switch™,
	ON	Xbox Series X S consoles and various audio-visual devices that are CEC-capable.
		If HDMI™ CEC is set to 0N:
		The monitor will automatically power on when the CEC device is turned on.
		The CEC device will enter power saving mode when the monitor is turned off.
		 When Sony PlayStation®, Nintendo® Switch™, or Xbox Series XIS console is connected, Game Mode and Pro Mode will be automatically set to default Eco mode and can be adjusted to users' preferred modes later.
Type C PD Charge	OFF	Type C PD Charge enables users to charge their
	ON	devices through a USB Type-C connector, which can deliver up to 98W (20V/4.9A).
Power LED	OFF	Users can toggle the Power LED on/off.
	ON	During the Panel Protect process, the power LED indicator will blink orange until the process is complete.
Reset	YES	Users can Reset and restore settings to original
	NO	OSD Default in any mode.

MSI OLED Care

1st Level Menu	2nd/3rd Level Menu	Description		
Pixel Shift	Slow	Pixel Shift moves the pixels of your screen at		
	Normal	regular intervals to reduce the possibility of screen burn-in or image retention.		
	Fast	j		
Panel Protect		To maintain panel image quality, panel protect function will automatically activate when monitor using over 4 hours.		
		This protect function may take several minutes to complete.		
		The power indicator will blink orange color until process done.		
		During process executing, please do not unplug the power cord from monitor.		
		During process executing, press power button again to cancel this function.		

1st Level Menu	2nd/3rd Level M	enu	De	scriptio	n		
Protect Notice	Auto Usage 16 hrs		When set to Auto, Protect Notice will pop up when the panel exceeds 4 hours of cumulative usage.			4 hours of cumulative	
				pop up v		s, Protect Notice will acceeds 16 hours of	
			•		anel Protect is int vill pop up upon n	terrupted, Protect lext power-up.	
Static Screen Detection	OFF		•	If Static	Screen Detection	is set to ON:	
	ON			perio	detecting static ds of time, the mo tness to prevent		
						visuals, the monitor rightness setting.	
	Starting in	50 Sec				ne a static image	
	100 S		remains on the screen.				
	Time required	120 Sec		Time required specifies the time for bright			
	240 Sec		reduction after detecting a static image for 50/100 seconds.				
			The brightness reduction level depends on the setting of Reducing Level.				
	Reducing Level	1-7	Users can select a level for brightness reduction.			or brightness	
			Reducing effect depends on Brightness/ DisplayHDR setting.				
Multi Logo Detection	OFF		This function helps prevent image sticking phenomenon. When set to ON, brightness				
	ON			reduction of multi logo areas will kick in are detected.		reas will kick in if logos	
			•			k when the monitor is Refresh Rate) content.	
				VRR*	VRR Content**	Multi Logo Detection	
				ON	YES	Set to OFF & Unable to select	
				ON	NO	- Adjustable	
		r		OFF	N0	_	
	Reducing Level	1-2		Users ca reductio	an select a level f in.	or brightness	
			Reducing effect depends on Brightness/ DisplayHDR setting.				

1st Level Menu	2nd/3rd Level M	enu	De	Description			
Taskbar Detection	OFF ON		•	This function helps prevent image sticking phenomenon. When set to ON, brightness reduction of taskbar areas will kick in if taskbars are detected. This function will not work when the monitor receiving VRR (Variable Refresh Rate) conten			
				VRR* VRR Content** Taskbar Detection			
				ON	YES	Set to OFF & Unable to select	
				ON	N0	Adjustable	
				0FF	N0	Aujustabie	
	Reducing Level 1-3			Users can select a level for brightness reduction. Reducing effect depends on Brightness/DisplayHDR setting.			
Boundary Detection	OFF ON		This function helps prevent image sticking phenomenon. When set to ON, brightness reduction of boundary areas will kick in if boundaries, such as letters, pillars and ver lines, are detected. This function will not work when the monit receiving VRR (Variable Refresh Rate) cont				
				VRR*	VRR Content**	Boundary Detection	
				ON	YES	Set to OFF & Unable to select	
				ON	N0	Adimetable	
				OFF	N0	Adjustable	
	Reducing Level 1-3		Users can select a level for brightness reduction. Reducing effect depends on Brightness/DisplayHDR setting.				
OLED Panel Info.			This field shows the information of MSI OLED Care.				

^{*} HDMITM VRR (Variable Refresh Rate) synchronizes with Adaptive-Sync (ON/ OFF). For VRR ON/OFF status, please check Adaptive-Sync.

^{**} When VRR is set to ON, the monitor scaler will detect whether the graphics card is sending VRR content.

Specifications

Monitor	MPG 341CQPX QD-OLED			
Size	34.18 inch			
Curvature	1800R			
Panel Type	QD-OLED			
Resolution	3440 x 1440 (UWQHD)			
Aspect Ratio	21:9			
Brightness	• Typical SDR: 250 nits			
	• Peak HDR: 1000 nits			
Contrast Ratio	1500000:1			
Refresh Rate	240Hz			
Response Time	0.03ms (GtG)			
1/0	HDMI™ Connector x 2			
	DisplayPort x 1			
	USB Type-C Port x 1			
	USB 2.0 Type-A Port x2			
	• USB 2.0 Type-B Upstream Port x1			
	• Headphone Jack x1			
View Angles	178°(H) , 178°(V)			
DCI-P3*/ sRGB	99.3%/ 139.1%			
Surface Treatment	Anti-Reflection			
Display Colors	1.07B (10 bits)			
Monitor Power Options	100-240V~, 50/60Hz 3.5A			
	Power On < 250W			
Power Consumption (Typical)	Standby < 0.5W			
(1) (1)	Power Off < 0.3W			
Adjustment (Height)	0 ~ 100mm			
Adjustment (Tilt)	-5° ~ 20°			
Adjustment (Swivel)	-30° ~ 30°			
Kensington Lock	Yes			

Monitor		MPG 341CQPX QD-OLED		
VESA Mounting		• Plate Type: 100 x 100 mm		
		• Screw Type: M4 x 10 mm		
		• Thread Diameter: 4 mm		
		• Thread Pitch: 0.7 mm		
		Thread Length: 10 mm		
Dimension (W x	D x H)	812 x 318 x 427 mm		
Weight	Net	8.9 kg		
weight	Gross	12.7 kg		
Environment	Operating	• Temperature: 0°C to 40°C		
		Humidity: 20% to 90%, non-condensing		
		• Altitude: 0 ~ 5000m		
	Storage	• Temperature: -20°C to 60°C		
		• Humidity: 10% to 90%, non-condensing		

^{*} Based on CIE1976 test standards.

Preset Display Modes

1mportant

- All information is subject to change without prior notice.
- HDMI™ VRR (Variable Refresh Rate) synchronizes with Adaptive-Sync (ON/ OFF). For VRR ON/OFF status, please check Adaptive-Sync.

Class dans d	Standard Resolution		HDMI™ 2.1 - PC + DSC On			
Standard			HDMI™	DP	USB-C	
QHD	2560x1440	@60Hz	٧	٧	V	
		@120Hz	٧	٧	V	
WQHD	3440x1440	@50Hz	V			
		@60Hz	٧	V	V	
		@100Hz	٧	٧	V	
		@120Hz	٧	٧	V	
		@165Hz	٧	٧	V	
		@240Hz	V	٧	V	
Video Timing	720P		V	٧	V	
Resolution	1080P	@60Hz	V	V	V	
		@120Hz	V	V	V	
	HDMI™ VRR f	or PS	V			

Chandand	Desclution		HDMI™ 2.1 -	PC + DSC Off	
Standard	Resolution		HDMI™	DP	USB-C
QHD	2560x1440	@60Hz	٧	٧	V
		@120Hz	٧	٧	V
WQHD	3440x1440	@50Hz	٧		
		@60Hz	٧	٧	٧
		@100Hz	٧	٧	٧
		@120Hz	٧	٧	٧
		@165Hz	٧	٧	٧
		@240Hz	٧		
Video Timing	720P		٧	٧	٧
Resolution 1	1080P	@60Hz	٧	٧	٧
		@120Hz	٧	٧	٧
	HDMI™ VRR f	or PS5	٧		

6			HDMI™ 2.1	l - Console +	DSC On
Standard	Resolution		HDMI™	DP	USB-C
QHD	2560x1440	@60Hz	٧	V	V
		@120Hz	٧	V	V
WQHD	3440x1440	@50Hz	٧		
		@60Hz	٧	V	٧
		@100Hz	٧	V	V
		@120Hz	V	V	V
		@165Hz	V	V	V
		@240Hz	V	V	V
Video Timing	720P		٧	V	V
Resolution	1080P	@60Hz	٧	V	V
		@120Hz	V	V	V
	2160P	@30Hz	V		
		@60Hz	V		
		@120Hz	V		
	2560x1080P	@60Hz	٧	V	V
		@120Hz	V	V	V
	HDMI™ VRR f	or PS5	V		

Chandand	Decelution		HDMI™ 2.1 -	Console + DSC	Off
Standard	Resolution		HDMI™	DP	USB-C
QHD	2560x1440	@60Hz	٧	٧	V
		@120Hz	٧	٧	V
WQHD	3440x1440	@50Hz	٧		
		@60Hz	٧	٧	V
		@100Hz	٧	٧	V
		@120Hz	٧	٧	V
		@165Hz	٧	٧	V
		@240Hz	٧		

Chandand	David di		HDMI™ 2.1 -	Console + DSC	Off
Standard	Resolution		HDMI™	DP	USB-C
Video Timing	720P		٧	٧	V
Resolution	1080P	@60Hz	٧	٧	٧
		@120Hz	٧	٧	٧
	2160P	@30Hz	٧		
		@60Hz	٧		
		@120Hz	٧		
	2560x1080P	@60Hz	٧	٧	٧
		@120Hz	٧	٧	V
	HDMI™ VRR fo	or PS5	٧		

Chandand	Resolution		Standard Mode		
Standard			HDMI™	DP	USB-C
QHD	2560x1440	@60Hz	٧	٧	٧
		@120Hz	٧	٧	٧
WQHD	3440x1440	@50Hz	٧		
		@60Hz	٧	٧	٧
		@100Hz	٧	٧	٧
		@120Hz	٧	٧	٧
		@165Hz	٧	٧	٧
		@240Hz	٧	٧	٧
Video Timing	720P		٧	٧	٧
Resolution	1080P	@60Hz	٧	٧	٧
		@120Hz	٧	٧	٧
	2160P	@30Hz	٧		
		@60Hz	٧		
		@120Hz	٧		
	2560x1080P	@60Hz	٧	٧	٧
		@120Hz	٧	٧	٧
	HDMI™ VRR for PS5		٧		

Clarida de	Resolution		PIP Mode (Not Support HDR)		
Standard			HDMI™	DP	USB-C
Full HD	1920x1080	@60Hz	٧	V	V
QHD	2560x1440	@60Hz	٧	V	V
		@120Hz	٧	V	V
WQHD	3440x1440	@50Hz	٧		
		@60Hz	٧	V	V
Video Timing Resolution	720P		٧	V	V
	1080P	@60Hz	٧	V	V
		@120Hz	٧	V	V
	2160P	@30Hz	V	V	
		@50Hz	٧	V	
		@60Hz	V	V	

Standard	Resolution		PBP Mode 1 (Not Support HDR)			
			HDMI™	DP	USB-C	
Video Timing Resolution	720P		V	V	V	
Used for PBP Full Screen	2560x1440	@60Hz	٧	٧	٧	
	880x1440	@60Hz	٧	٧	٧	

Standard	Resolution		PBP Mode 2/ Customize (Not Support HDR)		
			HDMI™	DP	USB-C
Video Timing Resolution	720P		V	V	V
Used for PBP Full Screen	1720x1440	@60Hz	V	V	V

Troubleshooting

The power LED is off.

- Press the monitor power button again.
- Check if the monitor power cable is properly connected.

No image.

- Check if the computer graphics card is properly installed.
- Check if the computer and monitor are connected to electrical outlets and are turned on.
- Check if the monitor signal cable is properly connected.
- The computer may be in Standby mode. Press any key to activate the monitor.

The screen image is not properly sized or centered.

 Refer to Preset Display Modes to set the computer to a setting suitable for the monitor to display.

No Plug & Play.

- Check if the monitor power cable is properly connected.
- Check if the monitor signal cable is properly connected.
- Check if the computer and graphics card are Plug & Play compatible.

The icons, font or screen are fuzzy, blurry or have color problems.

- · Avoid using any video extension cables.
- Adjust brightness and contrast.
- Adjust RGB color or tune color temperature.
- Check if the monitor signal cable is properly connected.
- Check for bent pins on the signal cable connector.

The monitor starts flickering or shows waves.

- Change the refresh rate to match the capabilities of your monitor.
- Update your graphics card drivers.
- Keep the monitor away from electrical devices that may cause electromagnetic interference (EMI).

Safety Instructions

- Read the safety instructions carefully and thoroughly.
- All cautions and warnings on the device or User Guide should be noted.
- Refer servicing to qualified personnel only.

Power

- Make sure that the power voltage is within its safety range and has been adjusted properly to the value of 100~240V before connecting the device to the power outlet.
- If the power cord comes with a 3-pin plug, do not disable the protective earth pin from the plug. The device must be connected to an earthed mains socket-outlet.
- Please confirm the power distribution system in the installation site shall provide the circuit breaker rated 120/240V, 20A (maximum).
- Always disconnect the power cord or switch the wall socket off if the device would be left unused for a certain time to achieve zero energy consumption.
- Place the power cord in a way that people are unlikely to step on it. Do not place anything on the power cord.
- If this device comes with an adapter, use only the MSI provided AC adapter approved for use with this device.

Environment

- To reduce the possibility of heat-related injuries or of overheating the device, do not place the device on a soft, unsteady surface or obstruct its air ventilators.
- Use this device only on a hard, flat and steady surface.
- To prevent the device from tipping over, secure the device to a desk, wall or fixed object with an anti-tip fastener that helps to properly support the device and keep it safe in place.
- To prevent fire or shock hazard, keep this device away from humidity and high temperature.
- Do not leave the device in an unconditioned environment with a storage temperature above 60°C or below -20°C, which may damage the device.
- The maximum operating temperature is around 40°C.
- When cleaning the device, be sure to remove the power plug. Use a piece of soft cloth rather than industrial chemical to clean the device. Never pour any liquid into the opening; that could damage the device or cause electric shock.
- Always keep strong magnetic or electrical objects away from the device.

- If any of the following situations arises, get the device checked by service personnel:
 - The power cord or plug is damaged.
 - Liquid has penetrated into the device.
 - The device has been exposed to moisture.
 - The device does not work well or you can not get it working according to the User Guide.
 - The device has dropped and damaged.
 - The device has obvious sign of breakage.

TÜV Rheinland Certification

TÜV Rheinland Low Blue Light Certification

Blue light has been shown to cause eye fatigue and discomfort. MSI now offers monitors with TÜV Rheinland Low Blue Light certification to ensure users' eye comfort and well-being. Please follow the instructions below to reduce the symptoms from extended exposure to the screen and blue light.



- Place the screen 20 28 inches (50 70 cm) away from your eyes and a little below eye level.
- Consciously blinking the eyes every now and then will help to reduce eye strain after extended screen time.
- Take breaks for 20 minutes every 2 hours.
- Look away from the screen and gaze at a distant object for at least 20 seconds during breaks.
- Make stretches to relieve body fatigue or pain during breaks.

TÜV Rheinland Flicker Free Certification

- TÜV Rheinland has tested this product to ascertain whether the display produces visible and invisible flicker for the human eye and therefore strains the eyes of users.
- TÜV Rheinland has defined a catalogue of tests, which sets out minimum standards at various frequency ranges. The test catalogue is based on internationally applicable standards or standards common within the industry and exceeds these requirements.
- The product has been tested in the laboratory according to these criteria.
- The keyword "Flicker Free" confirms that the device has no visible and invisible flicker defined in this standard within the range of 0 3000 Hz under various brightness settings.
- The display will not support Flicker Free when Anti Motion Blur/MPRT is enabled. (The availability of Anti Motion Blur/MPRT varies by products.)

Regulatory Notices

CE Conformity

This device complies with the requirements set out in the Council Directive on the Approximation of the Laws of the Member States relating to Electromagnetic Compatibility (2014/30/EU), Low-voltage Directive (2014/35/EU), ErP Directive (2009/125/EC) and RoHS directive (2011/65/EU). This product has been tested and found to comply with the harmonized standards for Information Technology Equipment published under Directives of Official Journal of the European Union.

FCC-B Radio Frequency Interference Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the measures listed below:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected
- Consult the dealer or an experienced radio/television technician for help.

Notice 1

The changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Notice 2

Shielded interface cables and AC power cord, if any, must be used in order to comply with the emission limits.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- 1. This device may not cause harmful interference, and
- 2. This device must accept any interference received, including interference that may cause undesired operation.

MSI Computer Corp.

901 Canada Court, City of Industry, CA 91748, USA (626) 913-0828

www.msi.com

WEEE Statement

Under the European Union ("EU") Directive on Waste Electrical and Electronic Equipment, Directive 2012/19/EU, products of "electrical and electronic equipment" cannot be discarded as municipal waste anymore and manufacturers of covered electronic equipment will be obligated to take back such products at the end of their useful life.



Chemical Substances Information

In compliance with chemical substances regulations, such as the EU REACH Regulation (Regulation EC No. 1907/2006 of the European Parliament and the Council), MSI provides the information of chemical substances in products at: https://csr.msi.com/global/index

RoHS Statement

Japan JIS C 0950 Material Declaration

A Japanese regulatory requirement, defined by specification JIS C 0950, mandates that manufacturers provide material declarations for certain categories of electronic products offered for sale after July 1, 2006.

https://csr.msi.com/global/Japan-JIS-C-0950-Material-Declarations

India RoHS

This product complies with the "India E-waste (Management and Handling) Rule 2016" and prohibits use of lead, mercury, hexavalent chromium, polybrominated biphenyls or polybrominated diphenyl ethers in concentrations exceeding 0.1 weight % and 0.01 weight % for cadmium, except for the exemptions set in Schedule 2 of the Rule.

Turkey EEE Regulation

Conforms to the EEE Regulations of the Republic Of Turkey

Ukraine Restriction of Hazardous Substances

The equipment complies with requirements of the Technical Regulation, approved by the Resolution of Cabinet of Ministry of Ukraine as of 10 March 2017, \mathbb{N}^2 139, in terms of restrictions for the use of certain dangerous substances in electrical and electronic equipment.

Vietnam RoHS

As from December 1, 2012, all products manufactured by MSI comply with Circular 30/2011/TT-BCT temporarily regulating the permitted limits for a number of hazardous substances in electronic and electric products.

Green Product Features

- Reduced energy consumption during use and stand-by
- Limited use of substances harmful to the environment and health
- Easily dismantled and recycled
- Reduced use of natural resources by encouraging recycling
- · Extended product lifetime through easy upgrades
- Reduced solid waste production through take-back policy

Environmental Policy

- The product has been designed to enable proper reuse of parts and recycling and should not be thrown away at its end of life.
- Users should contact the local authorized point of collection for recycling and disposing of their end-of-life products.



- Visit the MSI website and locate a nearby distributor for further recycling information.
- Users may also reach us at gpcontdev@msi.com for information regarding proper disposal, take-back, recycling, and disassembly of MSI products.

Warning!

Overuse of screens is likely to affect eyesight.

Recommendations:

- 1. Take a 10-minute break for every 30 minutes of screen time.
- 2. Children under 2 years of age should have no screen time. For children aged 2 years and over, screen time should be limited to less than one hour per day.

Copyright and Trademarks Notice

MSI 微星





Copyright © Micro-Star Int'l Co., Ltd. All rights reserved. The MSI logo used is a registered trademark of Micro-Star Int'l Co., Ltd. All other marks and names mentioned may be trademarks of their respective owners. No warranty as to accuracy or completeness is expressed or implied. MSI reserves the right to make changes to this document without prior notice.



The terms HDMI™, HDMI™ High-Definition Multimedia Interface, HDMI™ Trade dress and the HDMI™ Logos are trademarks or registered trademarks of HDMI™ Licensing Administrator, Inc.

Technical Support

If a problem arises with your product and no solution can be obtained from the user's manual, please contact your place of purchase or local distributor. Alternatively, please visit https://www.msi.com/support/ for further guidance.