



Core VESA  
Assembly Instructions

Tools Required:





- Pencil
  - Electric Drill
  - 2.5mm Drillbit
  - Socket Driver
- \*if fixing to a surface*

Sheet Code: BP-IM-085\_REV0  
Release Date: 14/08/2024

Copyright 2024 Spotspot Ltd. (T/A Bouncepad) all rights reserved. Confidential, no part of this publication may be reproduced or transmitted in any form without the written permission of the copyright holder.

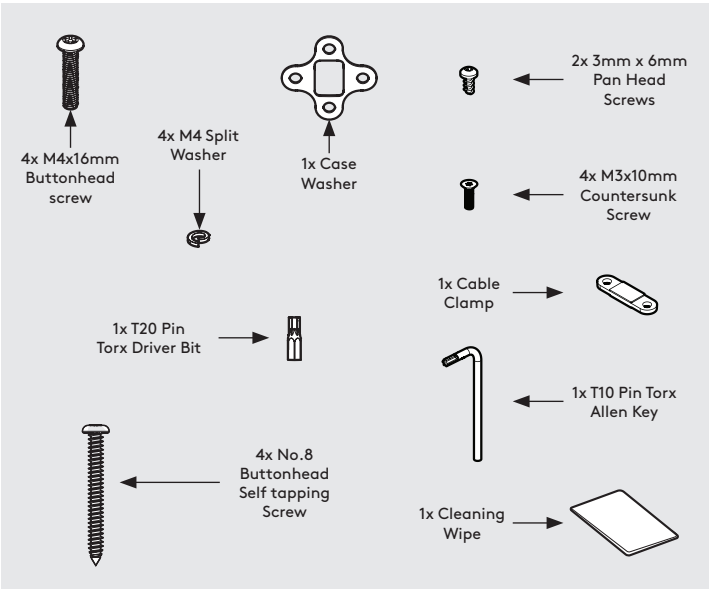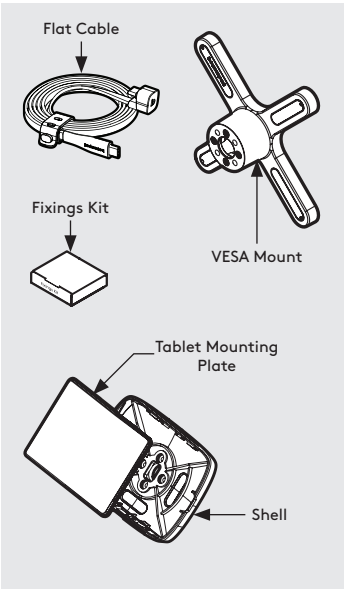

*\* Due to the modular nature of our product range you may receive additional fixings in the fixings kit*

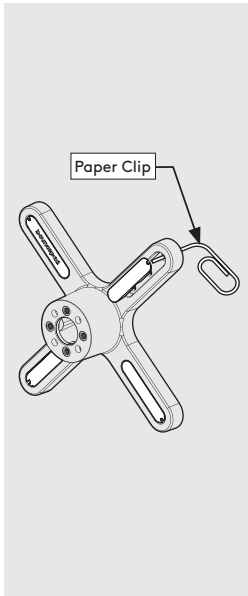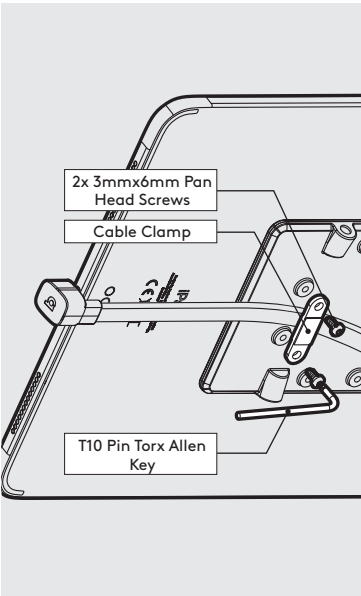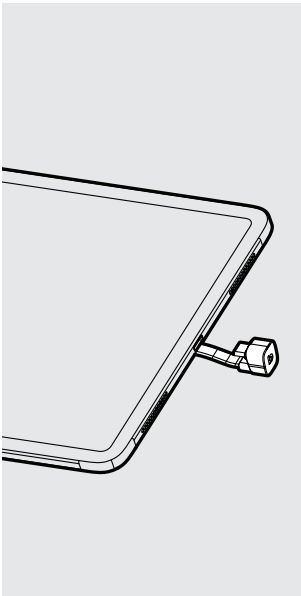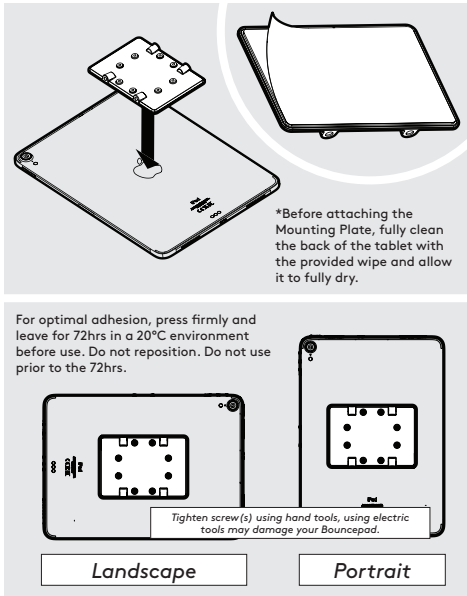


**1** Remove the Mounting Plate adhesive backing. Attach level & centrally to the Tablet back as shown.


**2** Attach the Flat Cable to the Tablet with the U-Bend Head.

**3** Secure the Flat Cable to the Mounting Plate with the Cable Clamp as shown.

**4** Remove the VESA Fixing Covers with a Paper Clip.

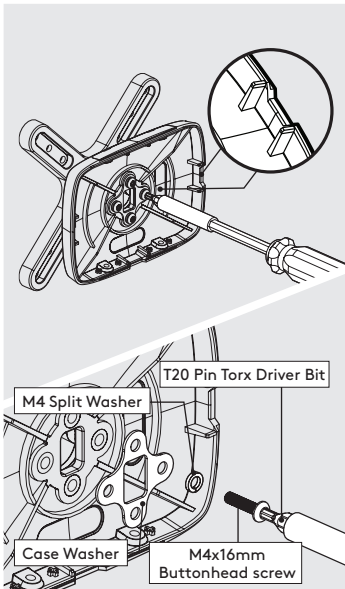


**5** Locate & attach the Shell to the Wallmount in the correct orientation.

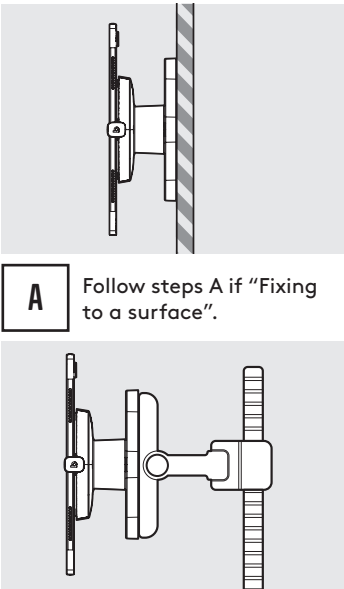


**A** Follow steps A if "Fixing to a surface".




**B** Follow steps B if "Fixing to a VESA Mount".

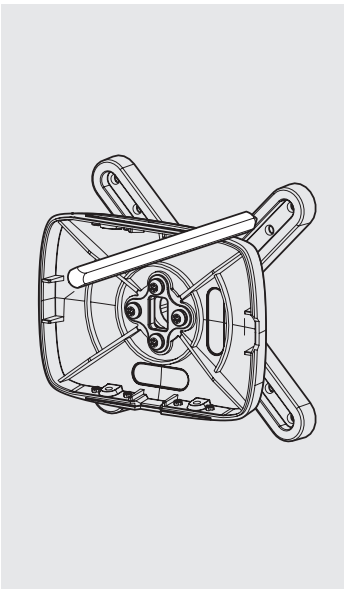

**A1** Position & mark where the VESA is to be located. Ensure the VESA is level.


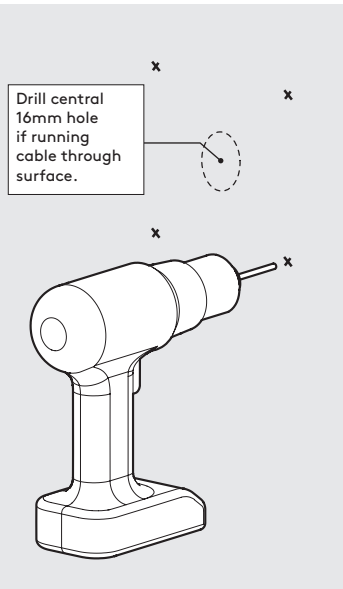


**A2** Drill the fixing holes into your surface.

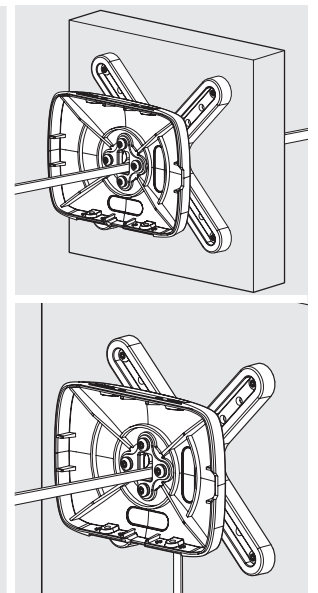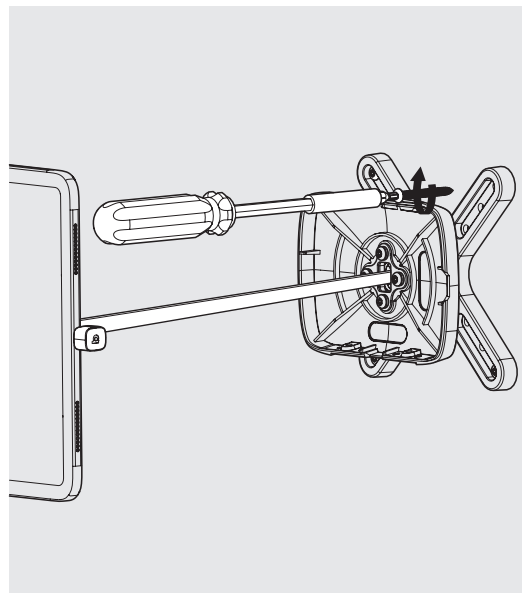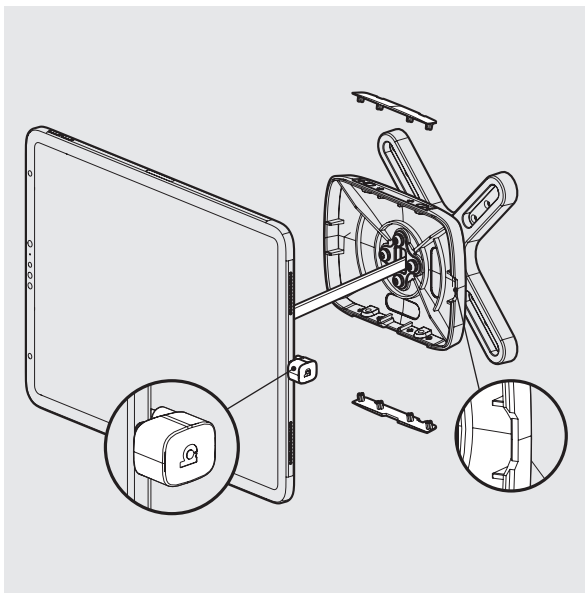

**A3** Remove the Shell Fixing Covers. Feed the Flat Cable into the assembly & locate the Tablet in the chosen orientation.

**A4** Attach the VESA to the surface with your chosen cable management.

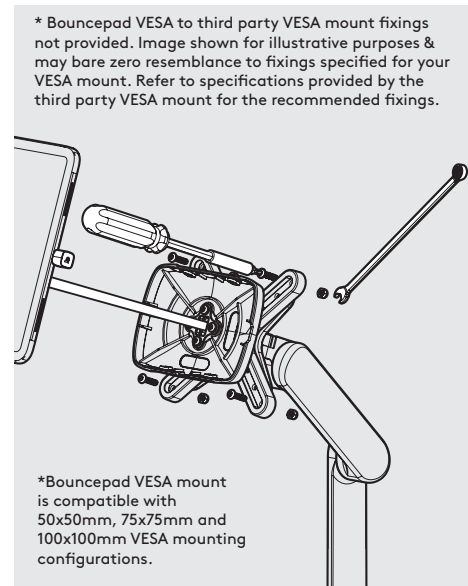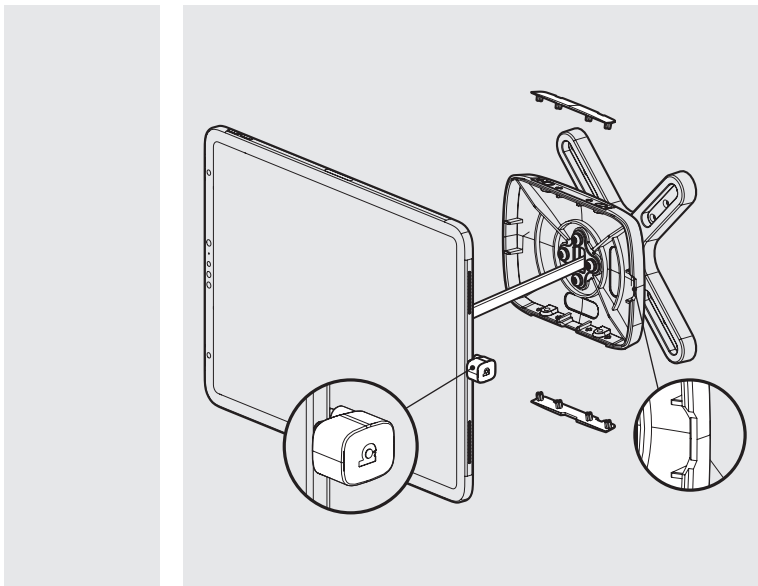

\* Bouncepad VESA to third party VESA mount fixings not provided. Image shown for illustrative purposes & may bare zero resemblance to fixings specified for your VESA mount. Refer to specifications provided by the third party VESA mount for the recommended fixings.




\*Bouncepad VESA mount is compatible with 50x50mm, 75x75mm and 100x100mm VESA mounting configurations.

**A5** Go to step 6.

**B1** Remove the Shell Fixing Covers. Feed the Flat Cable into the assembly & locate the Tablet in the chosen orientation.

**B2** Secure the Bouncepad VESA mount to VESA mounting bracket

**B3** Go to Step 6.

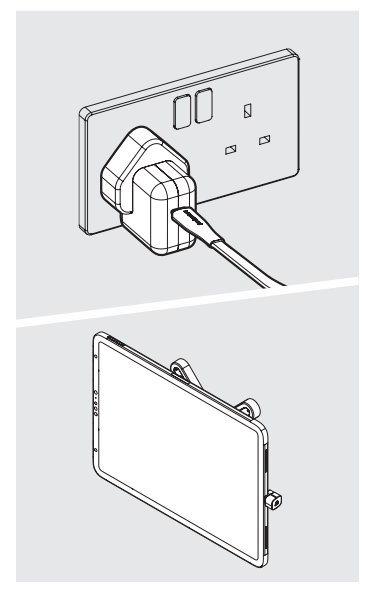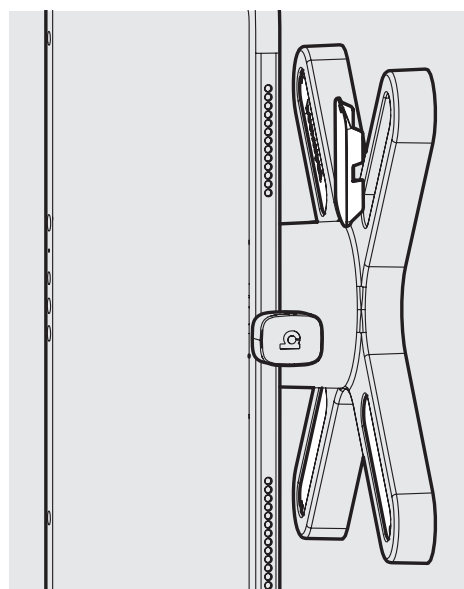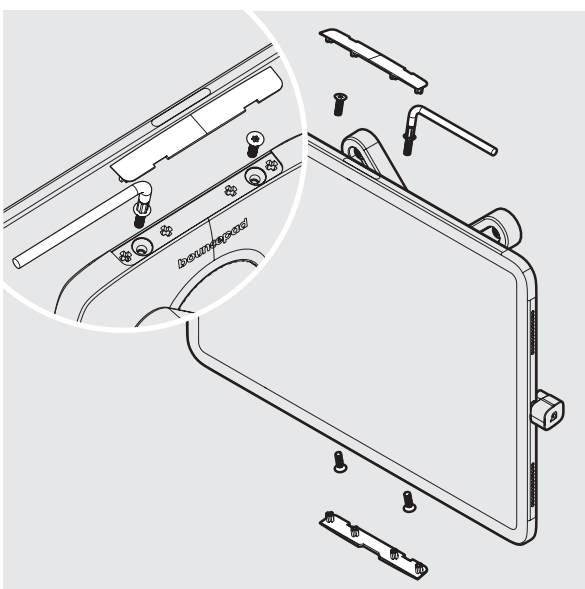

**6** Secure the Tablet to the Shell & attach the Shell Fixing Covers as shown.

**7** Attach the VESA Fixing Covers to the VESA.

**8** Connect tablet to power & installation is now complete.