


AC-NUC-T1

VENDOR
FORTINET

SUPPORTED MODELS
FS-110G

COLOR
WHITE

DIMENSIONS
(HxWxD)
6 x 140 x 253 / 200 mm
0.24 x 5.51 x 9.96 / 7.87 inch

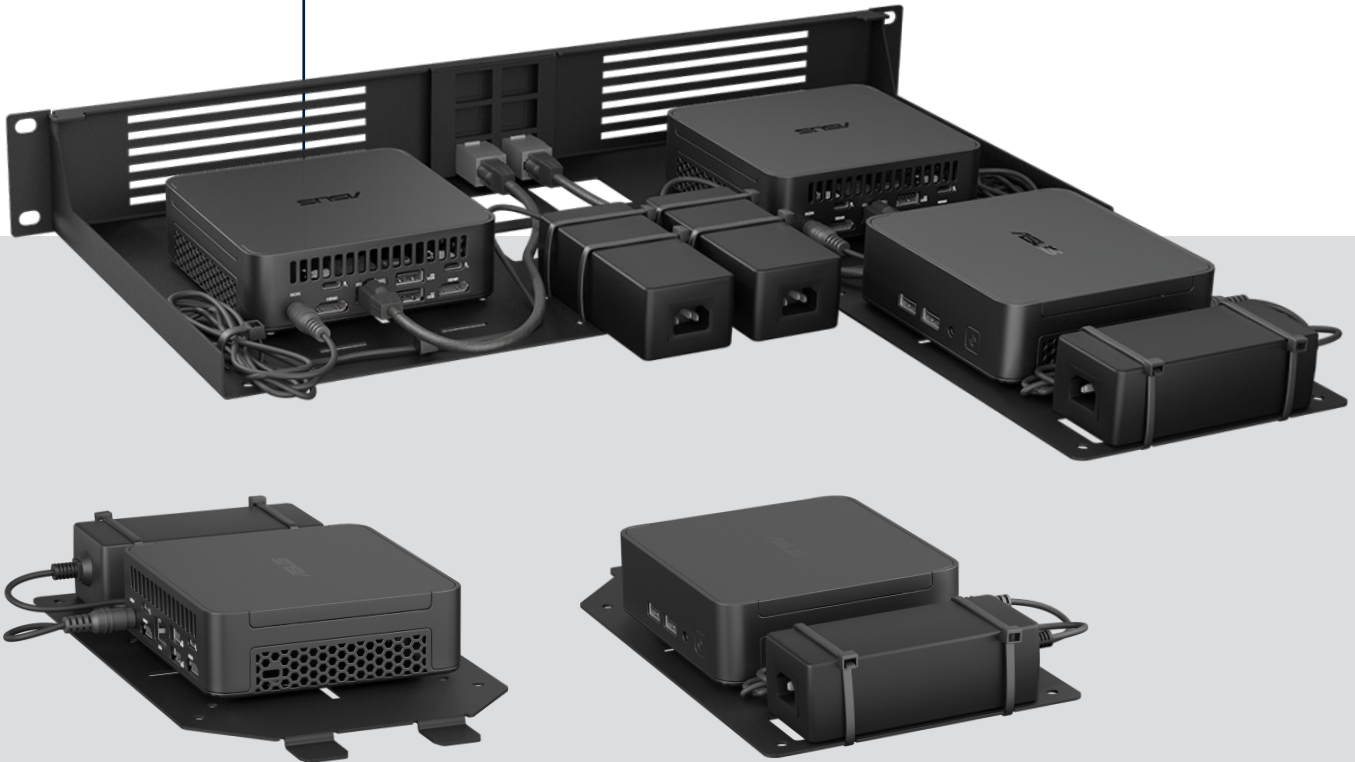

MOUNTING INSTRUCTIONS

The NUC can be installed directly onto the rackmount or using a VESA mount. With both methods, the NUC can be oriented in any direction. When placed directly on the rack, it can also be repositioned along the X or Y axis.

VESA Installation

1. Place the VESA mount on the rack. Insert 4 silver screws from the bottom of the rack through the rack and the VESA mount, then secure it with 4 nuts.
2. Slide the NUC onto the VESA mount and continue with step 3.

Direct Installation

1. Place the NUC on the rack with the mounting holes aligned above the slots. Secure it with 2 black screws.
3. Place the power supply on the rack and secure it with 2 zip ties. Connect the power supply to the appliance.
4. Hinge the extension plate in the rackmount kit.

Please ensure proper ventilation according to the network appliance manufacturer's guidelines.

PACKAGE CONTENTS

- 1 Extension plate
- 4 Nut M3
- 4 Screw silver M3 6mm
- 3 Screw black M3 8mm
- 3 Zip ties
- 1 Allen key

Appliance not included.



**CONSIDER THE ENVIRONMENT,
RECYCLE WHERE APPLICABLE**

QUESTIONS

Email support@rackmount.it or contact your reseller.

RACKMOUNT.IT

Install Guide - 07-08-2025