


S27i-30 Simplified service manual for dismantling

Model Name: ThinkVision S27i-30

Exploded Diagram

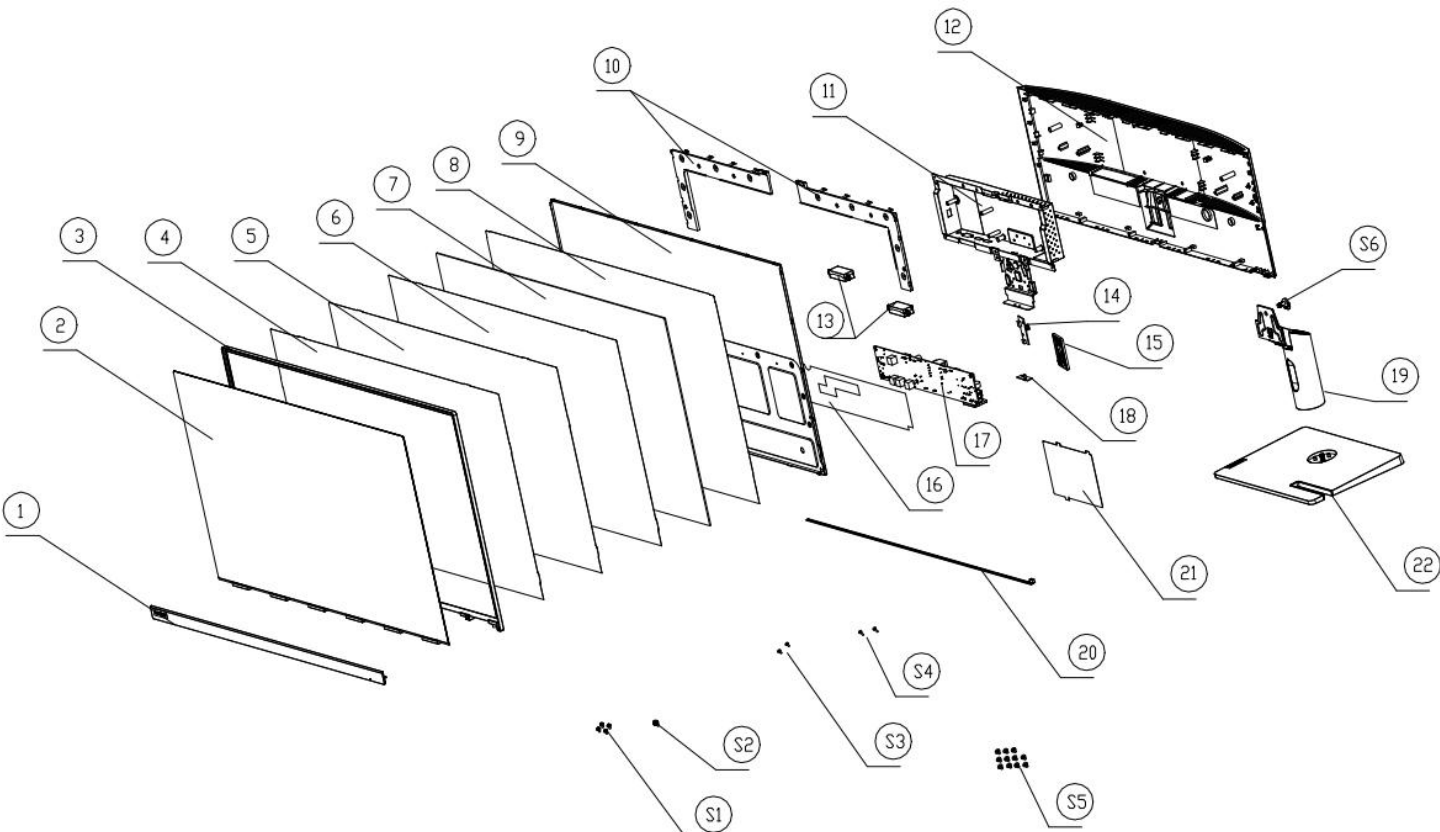

NO	P/N	NAME	COLOR	Q'ty
01		DECO		1
02		PANEL		1
03		BEZEL		1
04		PRISMATIC SHEET		1
05		DIFFUSER_1		1
06		DIFFUSER_2		1
07		LGP		1
08		REFLECTOR		1
09		BACKPLANE		1
10		CONNECTOR		1
11		MAINF RAME		1
12		REAR COVER		1
13		LOUDSPEAKER		1
14		KEY BOARD_1		1
15		SOURCE KEY		1
16		TCON_MYLAR		1
17		POWER BOARD		1
18		KEY BOARD_2		1
19		STAND		1
20		LIGHT BAR		1
21		POWER MYLAR		1
22		BASE		1
				6

NO.	PART NO.	QTY.	UNIT	
S1	200-00300611RY	4	PCS	SCREW M3X6
S2	200-09400805RB	1	PCS	SCREW M4X8
S3	200-01250601RB	2	PCS	SCREW M2.5X6
S4	200-01250902RY	2	PCS	SCREW M2.5X9.2
S5	200-05300501RY	11	PCS	SCREW M3X5
S6	200-09400805RB	1	PCS	SCREW M6X8

1. Precaution

Please read the precaution as follows to prevent any damages to the LCD Monitor.

Make sure all power connector is removed. Be sure that the LCD Monitor is in power off status.

Prepare soft cloth and sponge as working platform to place LCD monitor horizontally.



Hold LCD by the side carefully and DON'T touch or press panel directly.



2. Appropriate tools

Select the Appropriate tools for disassembly and re-assembly.


Phillips screwdriver	
spacer screwdriver	
C/D Disassembly Tool	
Gloves or soft cloth	

3. Disassembly SOP



1. Remove the stand assy

Starting from the back of the monitor, remove the screws and press button to remove the stand.


Remove the DECO and then open the rear cover.

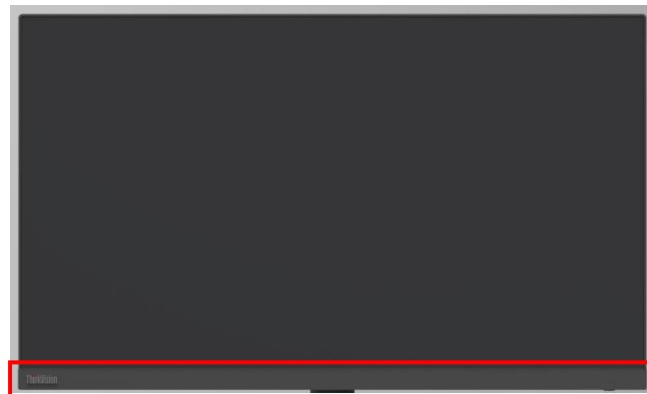


2. Separated the rear cover and disconnect the connectors.

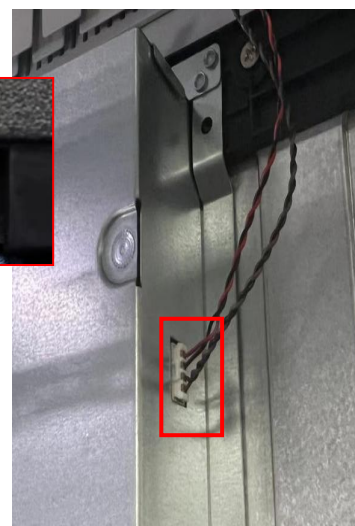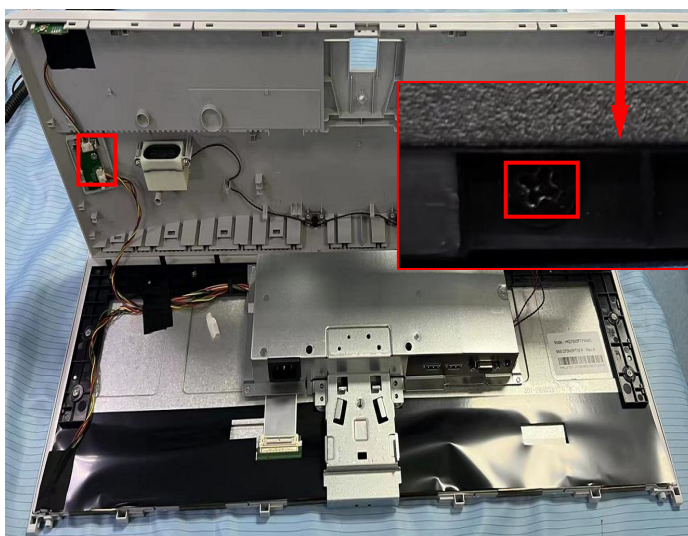

3. Tape the tapes as below and screws.





4. Panel

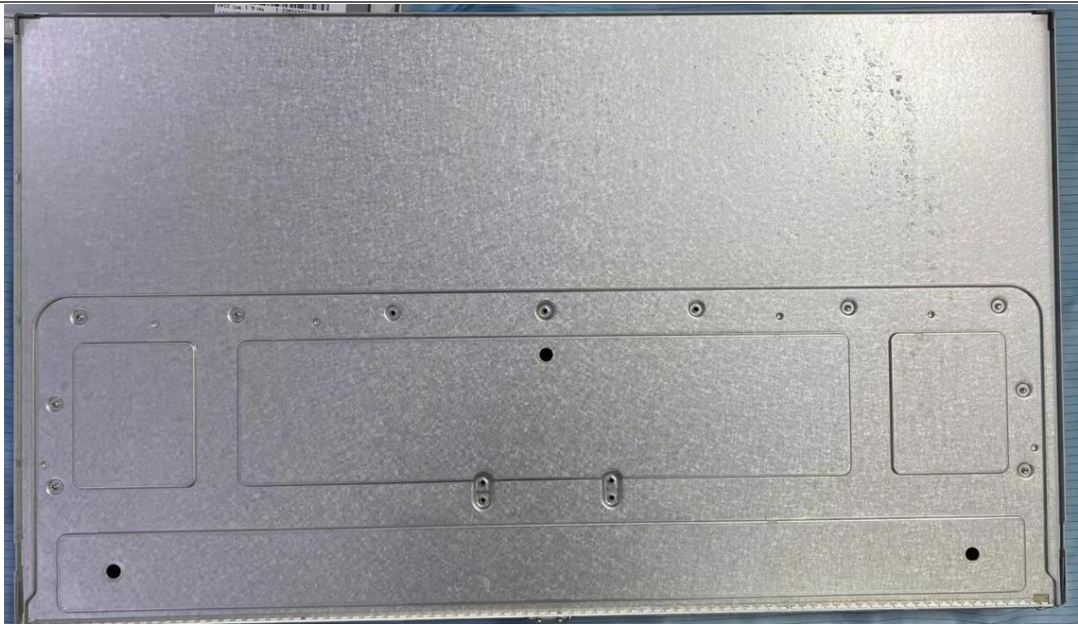

5. Remove the boards

Unscrew the screws

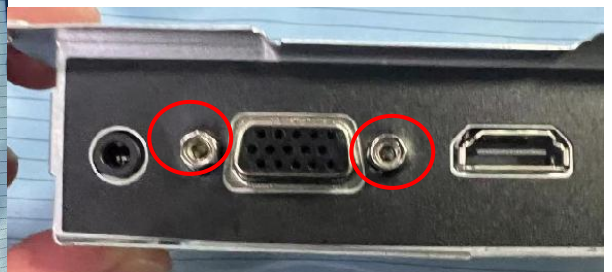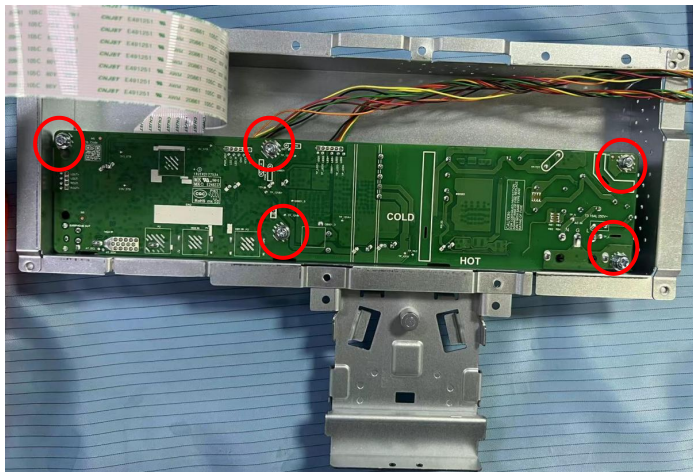

Main 、 Power board

