

NEC DISPLAY SOLUTIONS

NaViSet ADMINISTRATOR 2

UNIFIED DISPLAY DEVICE CONTROL AND ASSET MANAGEMENT SOFTWARE



All-in-one support system for NEC Desktops, Projectors and Large Format Displays

IDEAL FOR ANY MULTI-DEVICE INSTALLATION

NaViSet Administrator 2 is an all-in-one remote support solution that manages the majority of NEC display devices and Windows computers. It is ideal for multi-device installations over larger infrastructures, for example in the corporate/large businesses, transportation, energy and utility, leisure and museum, finance, retail industries. Through an easy to use and sophisticated graphical user interface (GUI), businesses can reduce their administration effort and costs by remotely diagnosing and correcting technology issues with connected display devices.

The NaViSet Administrator 2 software is designed to run from a central location and provides monitoring, asset management and control functionality of remote displays via LAN or serial connections. It can run continuously to provide automatic monitoring and control of devices while alerts can be set when specified parameters within the display device change.

NAVISET ADMINISTRATOR BENEFITS

All in one remote support for the majority of NEC Desktop monitors, Large Format Displays, Projectors as well as Windows computers.

Reduces administration effort, workload and costs.

Greatly eases administration of larger display installations.

Allows detailed analysis of connected devices.


Supports ECO policies (e.g. switches off displays automatically or adapts brightness to ambient conditions etc.).

Easy to install, easy to integrate display devices, easy to operate.

NaViSet ADMINISTRATOR 2

How it works

- NaviSet Administrator 2 can perform various commands on one or many devices; e.g. change settings, perform operations on devices as well as reading settings and parameters (manually or automatically).
- Devices can be scheduled or updated at any time to poll basic or advanced information.
- Information gathered from devices can be exported to the clipboard, an Excel spreadsheet or a delimited text file.
- NaviSet Administrator 2 can periodically query connected devices to check for abnormal conditions, detect failures and identify changes to critical control settings.

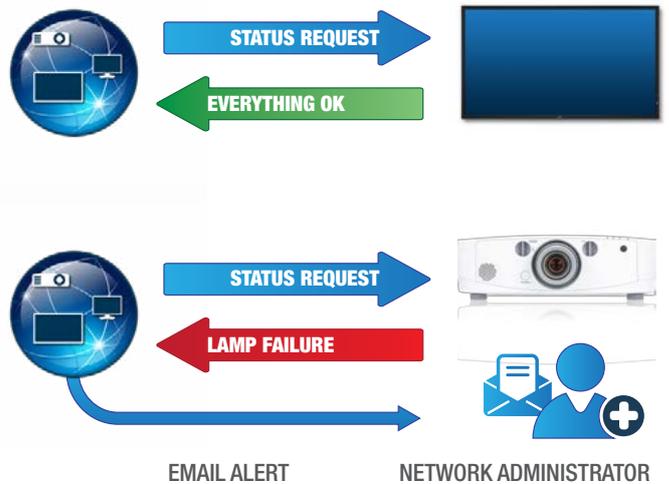

MANAGE ALL CONNECTED DISPLAY DEVICES FROM A CENTRALISED LOCATION

Control

Tie all products together and manage from a centralised location:

- **Adjust almost any parameter or setting** in a display from a remote location
- **Gather valuable information** pertaining to a Windows computer such as model name, operating system version, memory and CPU

Remote Monitoring

Remotely Query display information and controls:

- **Store all information** about connected devices in a local database
- **Run reports** that gather information on almost any parameter or setting
- **Assign an electronic Asset Tag** that is permanently stored within the display's memory to provide a secure method of asset tracking over a network

Task Management

Query or perform commands on one or more devices simultaneously:

- **Schedule periodic polling** at particular times or on demand
- **Issue email alerts automatically** if a diagnostic error is reported by a device or a setting has been changed
- **Monitor and perform** Command, Conditional and Informational tasks

SYSTEM REQUIREMENTS

Supported Display Devices:

- All NEC Desktop Display Models
- NEC Large Format Displays, Series: S, V, P, X and LCDXX20
- NEC Projector Models with a LAN or RS232 connection
- Supported features and functionality depend on model

Please see NEC website for up to date compatible models
www.nec-display-solutions.com/naviset

SPECIFICATIONS	MICROSOFT WINDOWS
Operating System	32 and 64 bit versions of MicroSoft Windows XP, Server 2003, Vista, Windows 7 and Windows 8
LAN	Standard TCP/IP LAN interface. Static IP addresses required for most display devices connected directly to LAN, unless name resolution (hostname) support is provided
System Resources	At least 64MB hard disk space available for installation Approximately 50MB per 100 devices hard disk space required for database storage At least 96MB RAM (192MB recommended)
Software	Adobe reader X or higher is recommended for viewing the User's Guide. Open Hardware Monitor (optional) for monitoring computer temperature and fan status

This document is © Copyright 2013 NEC Display Solutions Europe GmbH. All rights are reserved in favour of their respective owners. The document, or parts thereof, should not be copied, adapted, redistributed, or otherwise used without the prior written permission of NEC Display Solutions Europe GmbH. This document is provided "as is" without warranty of any kind whatsoever, either express or implied. Errors and omissions are excepted. NEC Display Solutions Europe GmbH may make changes, revisions or improvements in, or discontinue the supply of any product described or referenced in this document at any time without notice.



NEC Display Solutions Europe GmbH – HQ
 Landshuter Allee 12-14, D-80637 München
 info@mail@nec-displays.com
 Phone: +49 (0) 89 99 699-0
 Fax: +49 (0) 89 99 699-500
www.nec-display-solutions.com

Document Name:	NaViSet Leaflet
Document Revision:	Version 1
Document Date:	05/13

Empowered by Innovation

