W1B
Welcome Guide



support.arctic.ac/w1b

Dear Customer,

Thank you for choosing the ARCTIC's W1B.

In order to assist you better, we launched a support platform for Smartphones (support.arctic.ac).

I hope you enjoy this monitor arm and we at ARCTIC look forward to further enriching your life with our products. If you would like to share how you use ARCTIC's products please do so at https://www.facebook.com/ARCTIC.en


ARCTIC is a fully carbon neutral company and your support helps us to compensate every kilogram of CO_2 we produce.
Thank You

Sincerely,

Magnus Huber
ARCTIC CEO

Thank you for selecting ARCTIC W1B-Monitor Wall Mount with Quick-Fix System.

Compatibility



13" - 32" Monitor



Load up to 20kg



VESA 75 / 100


Quick Start Guide

The information in this booklet will guide you through the mounting process and included all you need to know on our product. This user guide included the following:


- Packaging contents
- Installation
- Warning
- Support
- Warranty

Accessories

Ⓐ Monitor Mount x 1

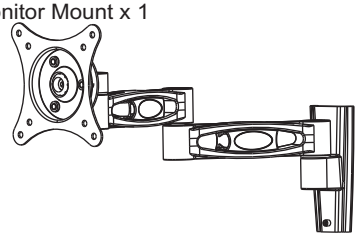

Ⓑ Wall Mount x 1



Ⓒ Hey Key (4 mm) x 1



Ⓓ Hey Key (3 mm) x 1



Ⓔ Spacer x 4



Ⓘ M4 (30 mm) x 4



Ⓙ M5 (12 mm) x 4



Ⓚ M5 (30 mm) x 4



Ⓕ Plastic Peg x 2



Ⓖ Wood Screw x 2




Ⓗ M4 (12 mm) x 4




Installation

1 Position and screw the mount on the wall


For Wooden wall, use
Wood Screw Ø6 x 50 mm x 2

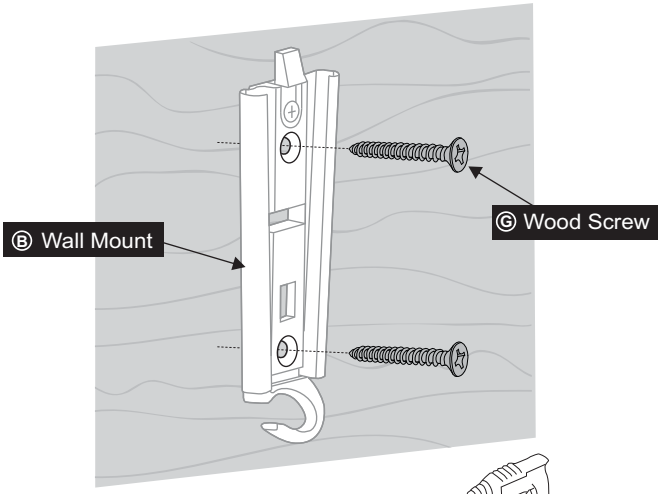



Depth of screws in the wall: 20 mm (0.8”)
Diameter: Ø3 mm (0.12”)


For Brick wall, use Plastic Peg x 2.
Insert into the brick wall and fix mounting with
Wood Screw Ø6 x 50 mm

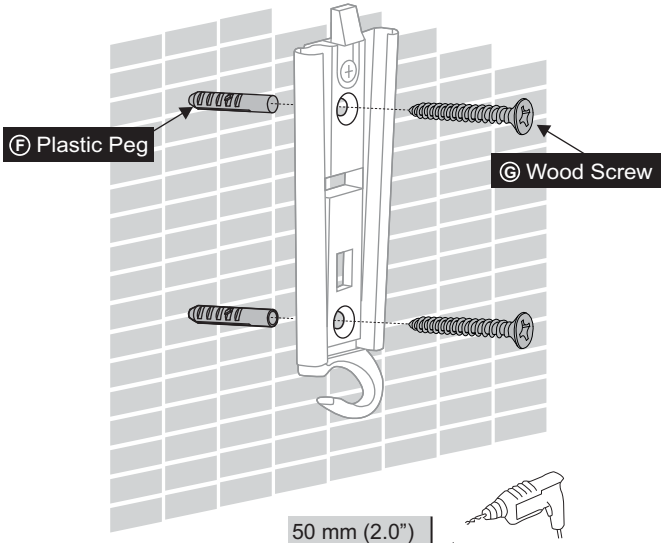


Depth of screws in the wall: 50 mm (2”)
Diameter: Ø8 mm (0.31”)

2 Choose the right screws according to the size and depth of the holes at the back of the monitors. Spacers are used to fill the gap between the mounting bracket and the holes if any.

Extended version

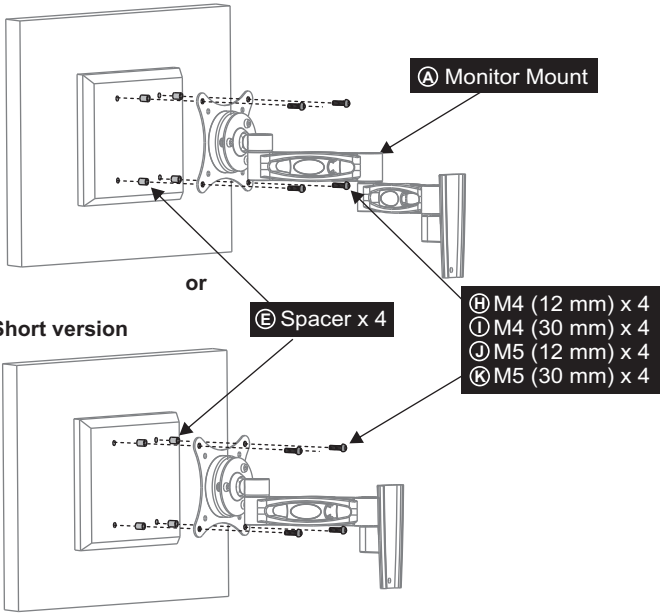

VESA 100
Distance 100 mm



VESA 75
Distance 75 mm






Table of VESA Mounting Interface Standard

Designation	Width × Height	Screw	Compatible
MIS-D 75	75 mm × 75 mm	M4, M5	Yes
MIS-D 100	100 mm × 100 mm	M4, M5	Yes
MIS-E	200 mm × 100 mm	M4	No
MIS-F	200 mm × 200 mm 400 mm × 400 mm 600 mm × 200 mm 600 mm × 400 mm 800 mm × 400 mm 280 mm × 150 mm	M6, M8	No

3 Slip the TV mount into the wall mount.
Turn and tighten screws to lock the mounting.

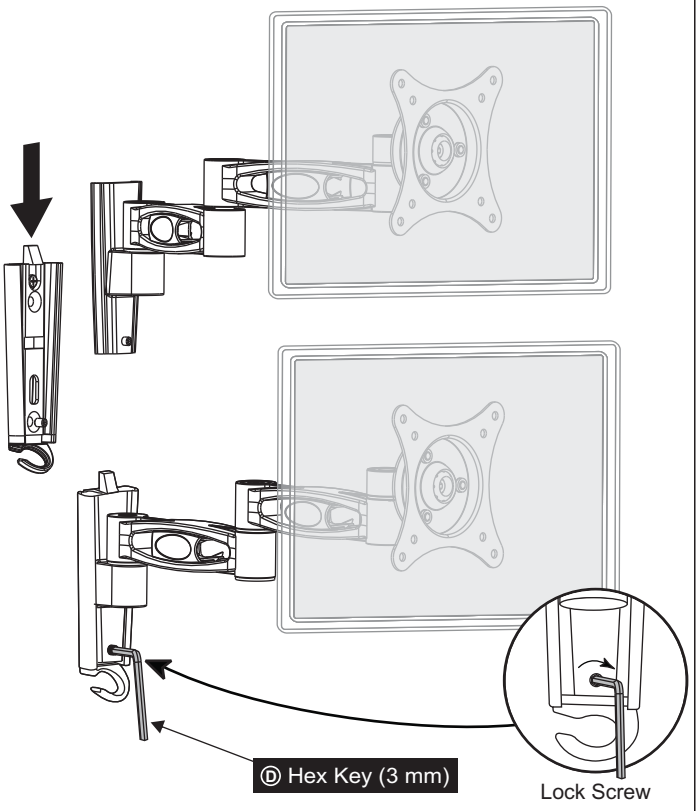



7 Adjust the flexibility of the hinges with the hex key and the lockable screw.

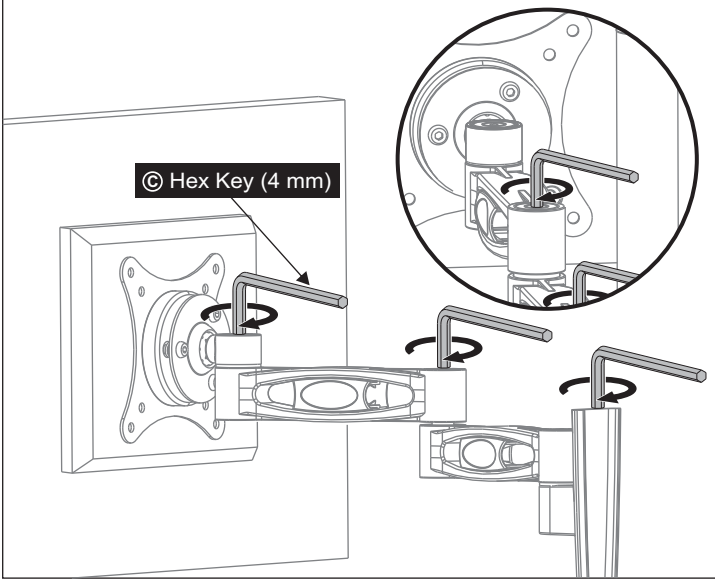

4 The mounting is now set, you can make 360° rotation, 180° swivel or ±15°tilt to adjust to a perfect positioning.


Extended version




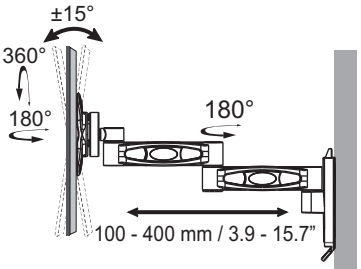

or


Short version






Adjust the Tightness of the Monitors

Slightly loosen or tighten the screw by a 4 mm hex key when the monitor is too tight or loose

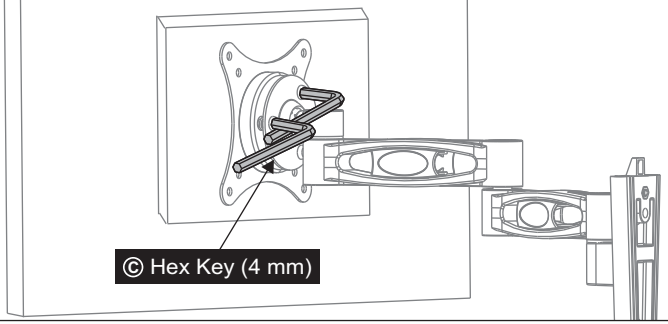

Cable Management

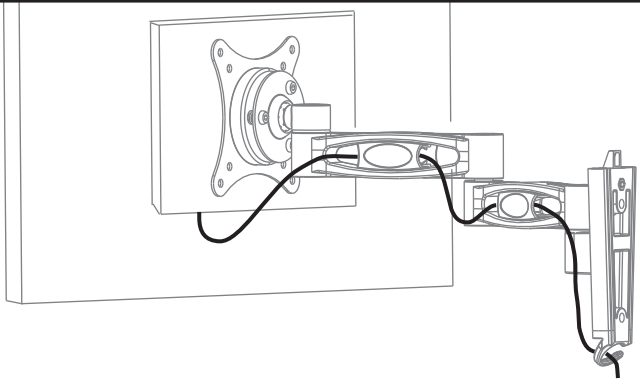

Specifications	
Material	Aluminum Alloy ADC12
Number of Mountable Monitors	1
Screen Size	13 " - 32 "
Maximum Monitor Weight	20 kg / 44 lbs per mount
Vesa Standard	75 / 100
Rotation	360 °
Swivel	180 °
Tilt	+/- 15 °
Weight	1.16 kg

Warning

- The wall structure must be capable of supporting the combined weight of the mount and the display; otherwise the structure must be reinforced.
- Safety measures must be practiced at all times during the installation of this product. Use proper safety gear and tools for the installation procedure to prevent personal injury.
- Prior to the installation of this product, the installation instructions should be read and completely understood. The installation instruction must be read to prevent personal injury and property damage. Keep these installation instructions in an easily accessible location for future reference.
- A secure structure must support the weight or load of the display. When mounting to a wall that contains wooden studs, dead centre of the wooden stud must be confirmed prior to installation.
- Do not install on a structure that is prone to vibration, movement or chance of impact. Failure to do so could result in damage to the mounting surface.
- Do not install near heater, fireplace, direct sunlight, air conditioning or any other source of direct heat energy. Failure to do so may result in damage to the display and could increase risk of fire.
- Recommended mounting surface: wooden studs and solid-flat concrete. If the mount is to be installed on any surface other than wooden studs, use suitable hardware (which is commercially available).

Support

For support and more information on the W1B - Monitor Wall Mount with Quick-Fix System, please visit http:\\w1b.arctic.ac

Warranty

This ARCTIC Product includes a two-year limited warranty.
Please visit http://warranty.arctic.ac for further details.

© 2016 ARCTIC (HK) Ltd. All rights reserved.

No part of this manual including the products described in it, may be reproduced, transmitted, stored in a retrieval system, or translated into any language in any form or by any means, except documentation kept by the purchaser for backup purpose, without the express written permission of ARCTIC (HK) Ltd. In no event shall ARCTIC, its directors or employees be liable for any indirect damages, incidental or consequential damages arising from any defect or error in this manual or product.

PKMNL00026C