


B442 Conettix Plug-in GPRS Cellular Communicator

www.boschsecurity.com



BOSCH
Invented for life

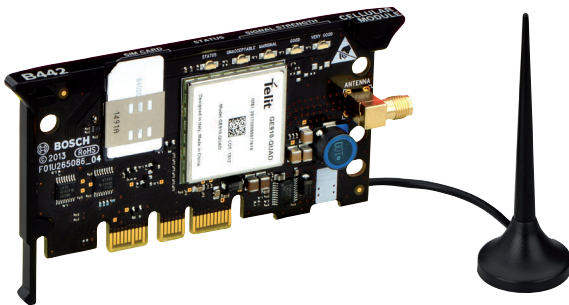

- ▶ Secure Conettix IP alarm communication for Latin America
- ▶ Remote programming and monitoring of compatible Bosch control panels
- ▶ Personal SMS message and e-mail notification options
- ▶ Configured directly from Bosch Remote Programming Software eliminating the need for separate configuration

The B442 provides IP communication over a GSM (GPRS) cellular network by plugging into a B Series control panel or B450 Conettix Plug-in Communicator Interface. Typical applications are:

- Alarm reporting to a central station
- Remote control panel programming through Remote Programming Software
- Remote monitoring and control through a mobile application
- Personal notification using SMS


The B442 is built for a wide variety of secure commercial and industrial applications. Flexible end-to-end path supervision, 128-bit to 256-bit AES encryption, and anti-substitution features make B442 desirable for high security and fire monitoring applications.



Notice

Cellular capability requires an appropriate SIM card and data plan.

System overview

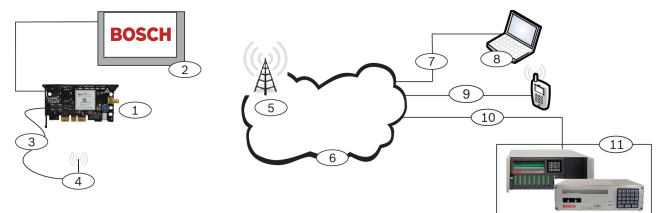

Callout — Description	Callout — Description
1 — B442 Conettix Plug-in GPRS Cellular Communicator	7 — Remote PC's network connection
2 — Compatible control panel	8 — Remote PC running RPS
3 — Antenna cable	9 — Personal SMS notification
4 — Magnetic base antenna	10 — Ethernet connection
5 — Base station on wireless carrier's network	11 — Central monitoring station
6 — IP network cloud	

Functions

Conettix IP communication via Cellular

In addition to the security provided by the network operator, the B442 uses our Conettix IP protocol that supports:

- Flexible polling intervals
- Resistance to Denial of Service attacks
- Anti-replay/anti-substitution keys

Easy Installation, troubleshooting, and maintenance

- No networking expertise required at field site (no firewall or router settings)
- No computer or special tools required for installation and troubleshooting
- Manage service plans and settings through RPS (Bosch Cellular service only)
- Diagnostic LEDs for on-site troubleshooting

LED	Function
Blue (STATUS)	System status Indicator
Red	Unacceptable signal strength
Yellow	Marginal signal strength
1 Green	Good signal strength
2 Green	Very good signal strength

Remote programming of Bosch control panels

The B442 supports secure, remote programming of the compatible Bosch control panels.

Personal notification and control

The B442 supports the Bosch Remote Security Control mobile application and can be configured for SMS personal notification reports to mobile phones.

Certifications and approvals

Region	Agency	Certification
US	FCC	FCC, Part 15 Class B Radiated/Conducted Emissions
	UL	UL 365 - Police Station Connected Burglar Alarm Units and Systems
		UL 636 - Holdup Alarm Units and Systems
		UL 864 - Control Units and Accessories for Fire Alarm Systems
		UL 985 - Household Fire Warning System Units
		UL 1023 - Household Burglar-Alarm System Units
UL 1076 - Proprietary Burglar Alarm Units and Systems		
		UL 1610 - Central Station Burglar Alarm Units
Canada	ULC	ULC C1023 - Household Burglar-Alarm System Units

		ULC C1076 - Proprietary Burglar Alarm Units and Systems
		ULC S303 - Local Burglar Alarm Units and Systems
		ULC S304 - Central and Monitoring Station Burglar Alarm Units
		ULC S545 - Residential Fire Warning System Control Units
	IC	ICES-003
Europe	CE	Certified

Region	Certification	
Europe	CE	2014/30/EU EMC Directive (EMC); 2014/35/EU Low-Voltage Directive (LVD); 1999/5/EC Radio equipment and Telecommunications Terminal Equipment (R&TTE); 2011/65/EU Restriction of the use of certain hazardous substances in electrical and electronic equipment (RoHS)
Brazil	ANATEL	1338-14-1855

Installation/configuration notes

Mounting considerations

The cellular communicator plugs directly into any B Series control panel via the on-board plug-in connection, or other compatible control panels via a B450 Conettix Plug-in Communicator Interface.

Wiring considerations

The cellular communicator connects to the B Series control panel without tools or physical wiring for power.

When used with the B450 Conettix Plug-in Communicator Interface, the B450 is wired to the SDI2, SDI, or option bus control panel.

The antenna is attached to the module via the threaded SMA connector.

Cellular Service Considerations

The B442 requires an active cellular service on a GSM supported cellular network.

Parts included

Quantity	Component
1	B442 Conettix Plug-in GPRS Cellular Communicator
1	Antenna
1	Literature pack

Technical specifications

Electrical

Current (operating)	Standby: 35 mA Alarm: 150 mA
Voltage (operating)	12 VDC nominal

Environmental

Environment	Environmental Class III - Indoor
Relative humidity	5 – 93% at +32°C (+90°F) non-condensing
Operating temperature	-10°C to +55°C (+14°F to +131°F)

Mechanical

Board Dimensions	50 mm x 93.5 mm x 15.25 mm (2 in x 3.68 in x 0.60 in)
Antenna (included)	<ul style="list-style-type: none"> • Magnetic base omni-directional • 2.5 m (8.2 ft) cable with SMA connector
SIM card	<ul style="list-style-type: none"> • 3V/1.8V SIM (compliant with GSM 11.12 recommendation)

Compatibilities

Control panels	<p>B5512/B5512E/B4512/B4512E/B3512/B3512E control panel with firmware v2.03 or higher (direct insertion)</p> <p>The B442 is compatible with most Bosch control panels when used with a B450 Conettix Plug-in Communicator Interface. Refer to the B450 datasheet for complete control panel compatibility listings.</p>
SIM card	3V/1.8V SIM (compliant with GSM 11.12 recommendation)
Cellular	4 Bands GPRS: 850/900/1800/1900 MHz

Ordering information

B442 Conettix Plug-in GPRS Cellular Communicator
 Multi-function cellular communicator. For use in Latin America.
 Order number **B442**

Represented by:

Americas:
 Bosch Security Systems, Inc.
 130 Perinton Parkway
 Fairport, New York, 14450, USA
 Phone: +1 800 289 0096
 Fax: +1 585 223 9180
 security.sales@us.bosch.com
 www.boschsecurity.us

Europe, Middle East, Africa:
 Bosch Security Systems B.V.
 P.O. Box 80002
 5617 BA Eindhoven, The Netherlands
 Phone: + 31 40 2577 284
 Fax: +31 40 2577 330
 emea.securitysystems@bosch.com
 www.boschsecurity.com

Asia-Pacific:
 Robert Bosch (SEA) Pte Ltd, Security Systems
 11 Bishan Street 21
 Singapore 573943
 Phone: +65 6571 2808
 Fax: +65 6571 2699
 apr.securitysystems@bosch.com
 www.boschsecurity.asia

China:
 Bosch (Shanghai) Security Systems Ltd.
 201 Building, No. 333 Fuquan Road
 North IBP
 Changning District, Shanghai
 200335 China
 Phone +86 21 22181111
 Fax: +86 21 22182398
 www.boschsecurity.com.cn

America Latina:
 Robert Bosch Ltda Security Systems Division
 Via Anhanguera, Km 98
 CEP 13065-900
 Campinas, Sao Paulo, Brazil
 Phone: +55 19 2103 2860
 Fax: +55 19 2103 2862
 latam.boschsecurity@bosch.com
 www.boschsecurity.com