

QUICK MAINTENANCE WITHOUT POWER INTERRUPTION

Easy switching to utility power during UPS maintenance


Designed for Uninterruptible Power Supply (UPS), the Maintenance Bypass PDU (MBP) Series allows utility power to bypass the UPS, so that users can perform quick and safe maintenance without having to shut down power system and connected equipment. The MBPs can be attached to the rear of UPS without taking up any space in the rack.

SERIES FEATURES

- 2U Rackmount
- Metal Housing
- Multiple Mounting Options
- Rack Ears Included
- Cascading Design

PRODUCT CALLOUTS

- 1 . Maintenance Bypass Switch
- 2 . UPS Input Connector
- 3 . UPS Output Connector
- 4 . Input Terminal Block
- 5 . Output Terminal Block
- 6 . AC Outlet
- 7 . Output Circuit Breaker

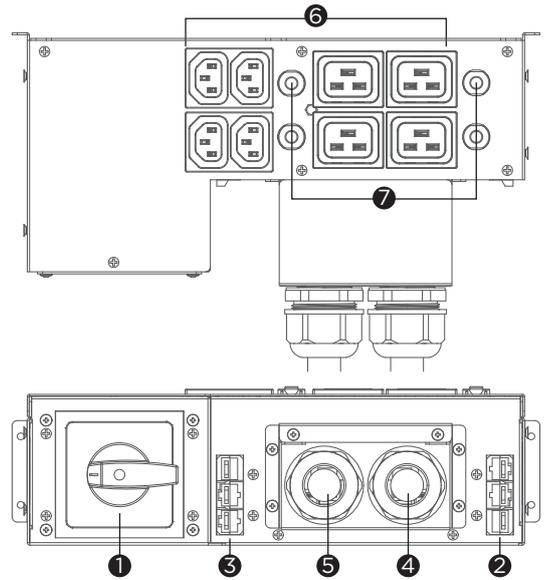

TECHNICAL SPECIFICATIONS

Model Name	MBP60AHVIEC82U
General	
Compatible Models	OLS6000ERT6U, OLS10000ERT6U, BPSE240V75ART3U, BPSE240V75ART3UOA
Input	
Input Voltage Range (Vac)	220 - 240
Rated Input Current (A)	60
MBP Socket to Utility Power	Hardwire Terminal Block
MBP Socket to UPS Power Input	AC Connector
MBP Socket to UPS Outlet	AC Connector
Output	
Outlet Type	Hardwire Terminal Block x 1, IEC C13 x 4, IEC C19 x 4
Typical Transfer Time (ms)	0
Cascading	Yes, Hardwire Terminal Block Outlet
Physical	
Form Factor	2U Rackmount
Physical Size	
Dimensions (WxHxD) (mm.)	288 x 88 x 141
Weight (kg.)	2.8
Environmental	
Operating Temperature (°C)	0 - 40
Operating Relative Humidity (Non-condensing) (%)	0 - 90
Certifications	
Certifications*	CE
RoHS	Yes

*Certifications may vary according to different regions. Visit www.cyberpower.com for more information.
#All specifications are subject to change without notice.