



# MASTER PL-S 2 Pin

## MASTER PL-S 11W/830/2P 1CT/5X10BOX

MASTER PL-S is an efficient low-wattage compact fluorescent lamp, typically used for decorative and orientation purposes. The original Philips-invented bridge technology guarantees optimum performance in the application, enabling more light and higher efficacy than the bended technology. The 2-pin version is designed for operation on electromagnetic gear and is provided with a plug-in/pull-out lamp base

### Product data

General Information	
Cap base	G23 [ G23]
Life to 10% failures (nom.)	6500 h
Life to 50% failures (nom.)	10000 h
LSF 2000 h Rated	99 %
LSF 4000 h Rated	98 %
LSF 6000 h Rated	95 %
LSF 8000 h Rated	86 %
Light Technical	
Colour code	830 [ CCT of 3,000 K]
Luminous flux (nom.)	900 lm
Luminous flux (rated) (nom.)	893 lm
Colour designation	Warm white (WW)
Correlated colour temperature (nom.)	3000 K
Luminous efficacy (rated) (nom.)	77 lm/W
Color rendering index (nom.)	82
LLMF 2000 h Rated	94 %
LLMF 4000 h Rated	91 %
LLMF 6000 h Rated	89 %
Operating and Electrical	
LLMF 8000 h Rated	86 %
Temperature	
Power (Rated) (Nom)	11.6 W
Lamp current (nom.)	0.155 A
Design temperature (nom.)	28 °C
Controls and Dimming	
Dimmable	no
Mechanical and Housing	
Cap base information	2P
Approval and Application	
Energy efficiency label (EEL)	A
Mercury (Hg) content (nom.)	1.4 mg
Energy Consumption kWh/1000 h	14 kWh

# MASTER PL-S 2 Pin

## Product Data


Full product code	871150026106970
Order product name	MASTER PL-S 11W/830/2P 1CT/5X10BOX
EAN/UPC – product	8711500261069
Order code	26106970
Local Code	PLS118302P
Numerator – quantity per pack	1

Numerator – packs per outer box	50
Material no. (12NC)	927936483011
Net weight (piece)	43.000 g
ILCOS Code	FSD-11/30/1B-I-G23

## Warnings and Safety

- Use only with electromagnetic control gear
- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position
- Dimming is not possible
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.



## Dimensional drawing



Product	D (max)	D1 (max)	A (max)	B (max)	C (max)
MASTER PL-S 11W/830/2P 1CT/5X10BOX	28 mm	13 mm	198 mm	214 mm	235.8 mm

PL-S 11W/830/2P LM

## Photometric data

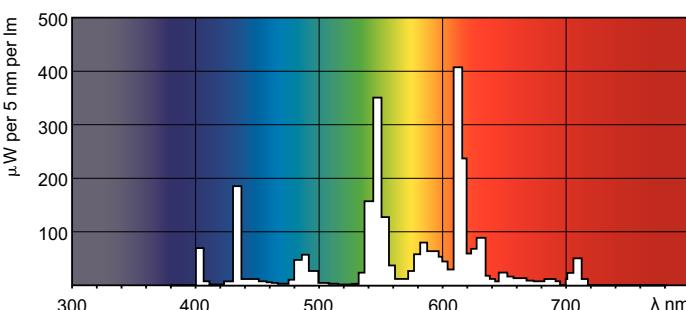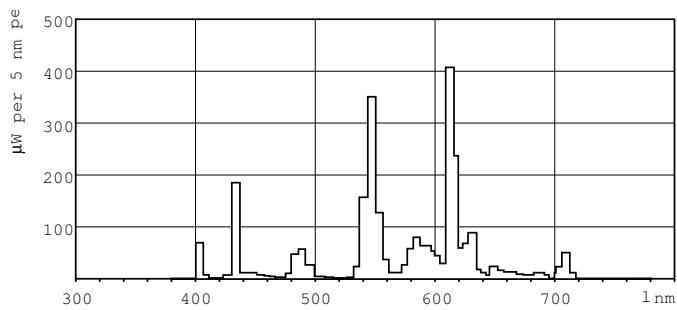

Lightcolour /830

Lightcolour /830

## MASTER PL-S 2 Pin

### Lifetime

