

SFP10G-SR

10GBASE, SFP+, SR, MMF TRANSCEIVER
850nm, 300m REACH, DUPLEX LC CONNECTOR

Features

- Up to 11.1Gbps Data Links
- Up to 300m transmission on MMF
- Power dissipation < 1W
- VSCSEL laser and PIN receiver
- Metal enclosure, for lower EMI
- 2-wire interface with integrated Digital Diagnostic monitoring
- Hot-pluggable SFP+ footprint
- Specifications compliant with SFF 8472
- Compliant with SFP+ MSA with LC connector
- Single 3.3V power supply
- Commercial case operating temperature range: 0°C to +70°C



Applications

- 10GBASE-SR/SW & 10G Ethernet

Standard

- Compliant to SFF-8431
- Compliant to 802.3ae 10GBASE-SR
- RoHS Compliant.

1. Absolute Maximum Ratings

Any stress beyond the maximum ratings can result in permanent damage. The device specifications are guaranteed only under the recommended operating conditions.

Parameter	Symbol	Min	Typ	Max	Unit
Storage Temperature	Ts	-40	-	85	°C
Relative Humidity	RH	5	-	95	%
Power Supply Voltage	VCC	-0.3	-	4	V
Signal Input Voltage		Vcc-0.3	-	Vcc+0.3	V

2. Recommended Operating Conditions

Parameter	Symbol	Min	Typ	Max	Unit	Notes
Case Operating Temperature	Tcase	0	-	70	°C	Commercial
Power Supply Voltage	VCC	3.14	3.3	3.47	V	

SFP10G-SR

10GBASE, SFP+, SR, MMF TRANSCEIVER
850nm, 300m REACH, DUPLEX LC CONNECTOR

Power Supply Current	ICC	-		300	mA	
Data Rate	BR		10.3125		Gbps	
Transmission Distance	TD		-	300	m	
Coupled fiber	Multi-mode fiber					9/125um SMF

3. Optical Characteristics

Parameter	Symbol	Min	Typ	Max	Unit	Note
Transmitter						
Average Launched Power	Pout	-6		-0.5	dBm	1
Extinction Ratio	ER	3.0			dB	
Optical Wavelength	λ	840	850	860	nm	
RIN	RIN			-128	dB/Hz	
Output Eye Mask	Compliant with IEEE 802.3ae					
Receiver						
Input Optical Wavelength	λ_c	1270		1610	nm	
Receiver Sensitivity	Psen			-10	dBm	2
Input Saturation Power (Overload)	Psat	0.5			dBm	
LOS Assert	LOSA	-30			dBm	
LOS De-assert	LOSD			-12	dBm	
LOS Detect Hysteresis	PHYS	0.5			dB	

Notes:

1. Launched power (avg.) is power coupled into a single mode fiber with master connector.
2. Measured with conformance test signal for BER = 10^{-12} .@10.3125Gbps, PRBS=2³¹-1,NRZ

4. Electrical Characteristics

Parameter	Symbol	Min	Typ	Max	Unit	Notes
Supply Voltage	Vcc	3.14	3.3	3.46	V	
Supply Current	Icc			300	mA	
Transmitter						
Input differential impedance	Rin		100		Ω	1
Single ended data input swing	Vin,pp	180		700	mV	
Transmit Disable Voltage	VD	Vcc-1.3		Vcc	V	
Transmit Enable Voltage	VEN	Vee		Vee+ 0.8	V	2
Transmit Disable Assert Time				10	us	

SFP10G-SR


10GBASE, SFP+, SR, MMF TRANSCEIVER
 850nm, 300m REACH, DUPLEX LC CONNECTOR

Receiver						
Differential data output swing	Vout,pp	300		850	mV	3
Data output rise time	tr	28			ps	4
Data output fall time	tf	28			ps	4
LOS Fault	VLOS fault	Vcc-1.3		VccHOST	V	5
LOS Normal	VLOS norm	Vee		Vee+0.8	V	5
Power Supply Rejection	PSR	100			mVpp	6

Notes:

2. Connected directly to TX data input pins. AC coupled thereafter.
3. Or open circuit.
4. Into 100 ohms differential termination.
5. 5. 20 – 80 %.
6. Loss Of Signal is LVTTTL. Logic 0 indicates normal operation; logic 1 indicates no signal detected. Receiver sensitivity is compliant with power supply sinusoidal modulation of 20 Hz to 1.5 MHz up to specified value applied through the recommended power supply filtering network.

5. Mechanical Diagram

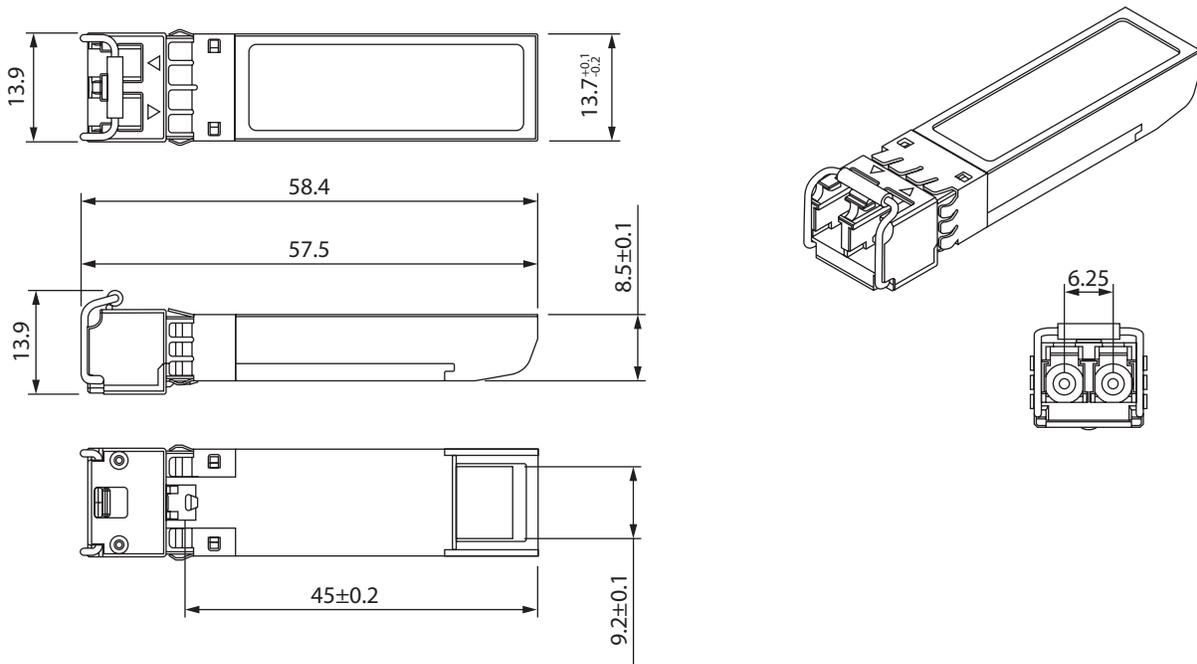

Note: External physical characteristics are subject to variation. This may include, but is not limited to, external case designs, pull tab colors and/or shapes, removal latch styles or colors, and label sizes and placement. These variations do not affect the function or characteristics of the transceivers.

SFP10G-SR

10GBASE, SFP+, SR, MMF TRANSCEIVER
850nm, 300m REACH, DUPLEX LC CONNECTOR

6. Ordering Information

OEM	Part Number	OEM	Part Number
Accedian	7SM-400-L	Dell	407-BBEF-L
Accedian	7SM-500-L	Enterasys	10GBASE-SR-SFPP-L
Adtran	1700485F1-L	Extreme	10301-L
Adtran	1442401G1-L	F5 Networks	F5-UPG-SFP+-R-L
Adva	1061701855-01-L	F5 Networks	FS-TRAN-SFP+SR-L
Adva	1061701865-02-L	Finisar	FTLX8574D3BCL-L
Adva	1061701855-02-L	Finisar	FTLX8574D3BCV-L
Alcatel	3FE63264AA-L	Finisar	FTLF8528P2BNV-L
Alcatel	3HE04824AA-L	Finisar	FTLX8571D3BCV-L
Alcatel	1AB410040001-L	Fortinet	FG-TRAN-SFP+SR-L
Alcatel	3HE0482AA-L	Fortinet	FN-TRAN-SFP+SR-L
Alcatel	SFP-10G-GIG-SR-L	Fujitsu	SFPP-SR-L
Alcatel	3HE11023AA-L	HP	JW091A-L
Alcatel	SFP-10G-SR-ALCATEL-L	Huawei	OMXD30000-L
Alcatel	3FE65608AA-L	Huawei	34060494-L
Allied Telesis	SP10SR-L	Infinera	TRX100103-L
Arista	SFP-10G-SR-AN-L	Intel	FTLX8573D3BTL-L
Arista	SFP-10G-SRL-AN-L	Intel	E10GSFPPSR-L
Aruba	SFP-10GE-SR-ARUBA-L	JDSU	PLRXPL-SE-S43-22-N-L
Avago	AFBR-709SMZ-L	Juniper	SRX-SFP-10GE-SR-L
Avago	AFBR-700SDZ-L	Juniper	SFP-10GE-SR-L
Avaya	AA1403015-E6-L	Juniper	QFX-SFP-10GE-SR-L
Brocade	XBR-000148-L	Juniper	SFPP-10GE-SR-L
Brocade	XBR-000180-L	Juniper	EX-SFP-10GE-SR-L
Brocade	10G-SFPP-SR-L	Juniper	QFX-SFP-10GE-USR-L
Brocade	10G-SFPP-USR-L	Juniper	SRX-SFPP-10G-SR-ET-L
Calix	100-01514-L	Mellanox	MFM1T02A-SR-L
Calix	100-01515-L	Meraki	MA-SFP-10GB-SR-L
Ciena	XCVR-S00Z85-L	Meraki	SFP-10GB-SR-L
Ciena	160-9116-900-L	MRV	SFP-10GD-SX-L
Cisco	ONS-SC+-10G-SR-L	MSA	L-SFP10G-SR-I

SFP10G-SR

10GBASE, SFP+, SR, MMF TRANSCEIVER

850nm, 300m REACH, DUPLEX LC CONNECTOR

Cyan	280-0330-00-L	MSA	L-SFP10G-SR
Dell	407-BCBN-L	Nokia	473842A-L
Dell	407-BBZM-L	Nokia	3AL82027AA-L
Dell	331-5311-L	OnePort	OP-SFP10G-SR
Dell	407-BBOU-L	PaloAlto	PAN-SFP-PLUS-SR-L
Dell	330-2410-L	Samsung	SFG-AFE000DAVZ-L
Dell	330-2405-L	Transition Networks	TN-SFP-10G-SR-L
Dell	330-8721-L		