SIEMENS

Data sheet 3RU2126-1EJ0



Overload relay 2.8...4.0 A Thermal For motor protection Size S0, Class 10 Contactor mounting Main circuit: Ring cable lug Auxiliary circuit: ring cable lug Manual-Automatic-Reset

product brand name	SIRIUS
product designation	thermal overload relay
product type designation	3RU2
General technical data	
size of overload relay	S0
size of contactor can be combined company-specific	S0
power loss [W] for rated value of the current at AC in hot operating state	5.7 W
• per pole	1.9 W
insulation voltage with degree of pollution 3 at AC rated value	690 V
surge voltage resistance rated value	6 kV
maximum permissible voltage for protective separation in networks with grounded star point	
 between auxiliary and auxiliary circuit 	440 V
 between auxiliary and auxiliary circuit 	440 V
 between main and auxiliary circuit 	440 V
between main and auxiliary circuit	440 V
shock resistance according to IEC 60068-2-27	8g / 11 ms
type of protection according to ATEX directive 2014/34/EU	Ex II (2) GD
certificate of suitability according to ATEX directive 2014/34/EU	DMT 98 ATEX G 001
reference code according to IEC 81346-2	F
Substance Prohibitance (Date)	10/01/2009
SVHC substance name	Blei - 7439-92-1
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
 during operation 	-40 +70 °C
during storage	-55 +80 °C
during transport	-55 +80 °C
temperature compensation	-40 +60 °C
relative humidity during operation	10 95 %
Main circuit	
number of poles for main current circuit	3
adjustable current response value current of the current- dependent overload release	2.8 4 A
operating voltage	
• rated value	690 V
at AC-3e rated value maximum	690 V
operating frequency rated value	50 60 Hz
operational current rated value	4 A
operational current at AC-3e at 400 V rated value	4 A

operating power	
• at AC-3	
— at 400 V rated value	1.5 kW
— at 500 V rated value	2.2 kW
— at 690 V rated value	3 kW
• at AC-3e	
— at 400 V rated value	1.5 kW
— at 500 V rated value	2.2 kW
— at 690 V rated value	3 kW
Auxiliary circuit	
design of the auxiliary switch	integrated
number of NC contacts for auxiliary contacts	1
• note	for contactor disconnection
number of NO contacts for auxiliary contacts	1
• note	for message "Tripped"
number of CO contacts for auxiliary contacts	0
operational current of auxiliary contacts at AC-15	
• at 24 V	3 A
• at 110 V	3 A
• at 120 V	3 A
• at 125 V	3 A
• at 230 V	2 A
• at 400 V	1 A
• at 690 V	0.75 A
operational current of auxiliary contacts at DC-13	0.10 A
• at 24 V	2 A
• at 60 V	0.3 A
• at 110 V	0.22 A
• at 125 V	0.22 A
• at 220 V	0.11 A
contact rating of auxiliary contacts according to UL	B600 / R300
Protective and monitoring functions	5000 / 10000
trip class	CLASS 10
design of the overload release	thermal
UL/CSA ratings	uoma.
full-load current (FLA) for 3-phase AC motor	
ian road current (i 27) for a phase it a motor	
at 480 V rated value	4 A
at 480 V rated value at 600 V rated value	4 A
at 600 V rated value	4 A 4 A
at 600 V rated value Short-circuit protection	
at 600 V rated value Short-circuit protection design of the fuse link	4 A
 at 600 V rated value Short-circuit protection design of the fuse link for short-circuit protection of the auxiliary switch required 	
at 600 V rated value Short-circuit protection design of the fuse link for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions	4 A fuse gG: 6 A, quick: 10 A
at 600 V rated value Short-circuit protection design of the fuse link for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position	4 A fuse gG: 6 A, quick: 10 A any
at 600 V rated value Short-circuit protection design of the fuse link for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method	4 A fuse gG: 6 A, quick: 10 A any Contactor mounting
at 600 V rated value Short-circuit protection design of the fuse link for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height	4 A fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm
at 600 V rated value Short-circuit protection design of the fuse link for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width	fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm
at 600 V rated value Short-circuit protection design of the fuse link for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth	4 A fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm
at 600 V rated value Short-circuit protection design of the fuse link for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and	fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm
at 600 V rated value Short-circuit protection design of the fuse link for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit	fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm 85 mm
at 600 V rated value Short-circuit protection design of the fuse link for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection	fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm 85 mm
at 600 V rated value Short-circuit protection design of the fuse link for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection for main current circuit	fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm 85 mm No Ring cable lug connection
at 600 V rated value Short-circuit protection design of the fuse link for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection for main current circuit for auxiliary and control circuit	fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm 85 mm No Ring cable lug connection ring terminal lug connection
at 600 V rated value Short-circuit protection design of the fuse link for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection for main current circuit	fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm 85 mm No Ring cable lug connection
at 600 V rated value Short-circuit protection design of the fuse link for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection for main current circuit for auxiliary and control circuit arrangement of electrical connectors for main current	fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm 85 mm No Ring cable lug connection ring terminal lug connection
at 600 V rated value Short-circuit protection design of the fuse link for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection for main current circuit for auxiliary and control circuit arrangement of electrical connectors for main current circuit	fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm 85 mm No Ring cable lug connection ring terminal lug connection
at 600 V rated value Short-circuit protection design of the fuse link for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection for main current circuit for auxiliary and control circuit arrangement of electrical connectors for main current circuit tightening torque	fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm 85 mm No Ring cable lug connection ring terminal lug connection Top and bottom
at 600 V rated value Short-circuit protection design of the fuse link of r short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection of or main current circuit of or auxiliary and control circuit arrangement of electrical connectors for main current circuit tightening torque of or main contacts for ring cable lug	fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm 85 mm No Ring cable lug connection ring terminal lug connection Top and bottom
at 600 V rated value Short-circuit protection design of the fuse link of r short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection of or main current circuit of or auxiliary and control circuit arrangement of electrical connectors for main current circuit tightening torque of or main contacts for ring cable lug of or auxiliary contacts for ring cable lug	fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm 85 mm No Ring cable lug connection ring terminal lug connection Top and bottom 2.5 2 N·m 0.8 1.2 N·m
at 600 V rated value Short-circuit protection design of the fuse link of r short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection of or main current circuit of or auxiliary and control circuit arrangement of electrical connectors for main current circuit tightening torque of or main contacts for ring cable lug outer diameter of the usable ring cable lug maximum	fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm 85 mm No Ring cable lug connection ring terminal lug connection Top and bottom 2.5 2 N·m 0.8 1.2 N·m 7.5 mm

design of the thread of the connection screw	
• for main contacts	M4
 of the auxiliary and control contacts 	M3
Safety related data	
failure rate [FIT] with low demand rate according to SN 31920	50 FIT
MTTF with high demand rate	2 280 a
T1 value for proof test interval or service life according to IEC 61508	20 a
protection class IP on the front according to IEC 60529	IP00
Display	
display version for switching status	Slide switch
Approvals Certificates	

General Product Approval

For use in hazardous locations



Confirmation









Declaration of Conformity

Test Certificates

Marine / Shipping





Type Test Certificates/Test Report

Special Test Certific-





Marine / Shipping













Confirmation

other

Railway

Vibration and Shock

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RU2126-1EJ0

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RU2126-1EJ0

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RU2126-1EJ0


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RU2126-1EJ0&lang=en


Characteristic: Tripping characteristics, I2t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RU2126-1EJ0/chai

Further characteristics (e.g. electrical endurance, switching frequency)
http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RU2126-1EJ0&objecttype=14&gridview=view1

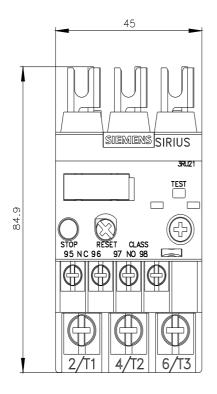

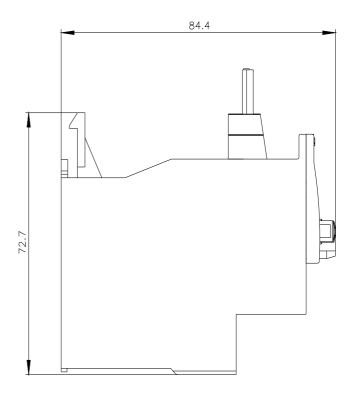

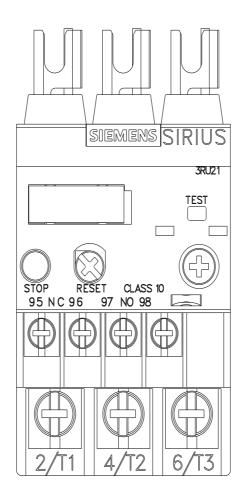

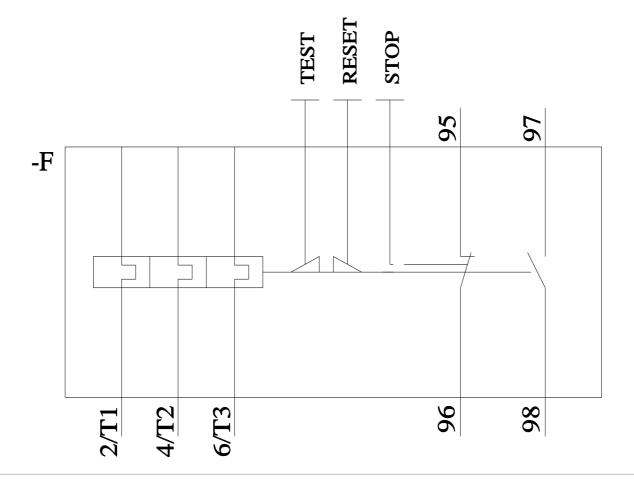

last modified: 9/5/2023 🖸