



## USB-C™ HDMI Tablet and Smartphone Docking Station - iPad Pro & Android - HDMI

### Product Diagram (DK30CHPH)


Front View

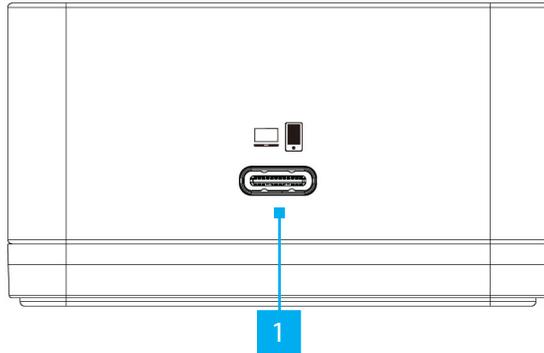

Rear View

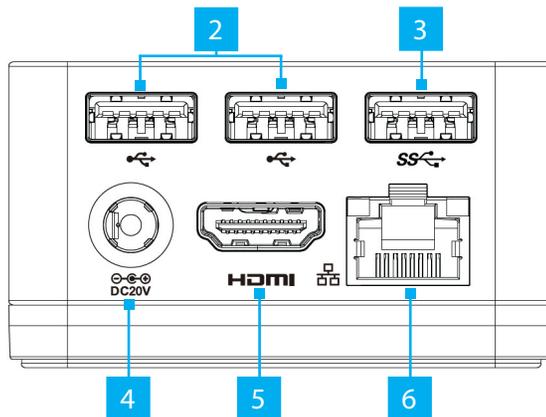

Side View

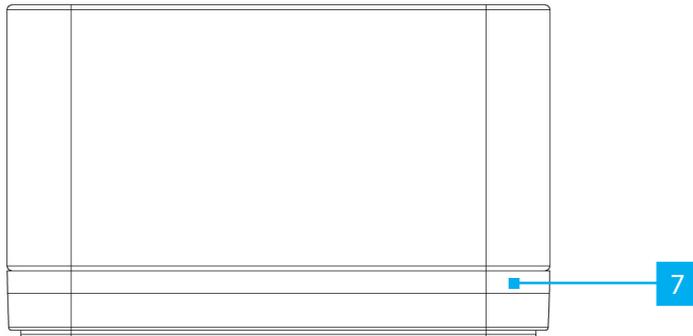

Port	Function
1 USB-C Host Port	<ul style="list-style-type: none"> <li>• SuperSpeed USB 5Gbps (USB 3.2 Gen 1)</li> <li>• DP 1.2 Alt Mode</li> <li>• Charge the <b>Host Device</b> while using the <b>Docking Station</b> <ul style="list-style-type: none"> <li>• PD3.0 5/9/12/15V</li> </ul> </li> <li>• Connect to a <b>Phone</b> or a <b>Tablet</b></li> </ul>
2 USB 2.0 Ports	<ul style="list-style-type: none"> <li>• USB 2.0</li> <li>• Connect a <b>USB-A Storage Device</b> (e.g. flash drive), or a <b>USB-A Peripheral Device</b></li> </ul>
3 SuperSpeed USB Port	<ul style="list-style-type: none"> <li>• SuperSpeed USB 5Gbps (USB 3.2 Gen 1)</li> <li>• Connect a <b>USB-A Storage Device</b> (e.g. flash drive), or a <b>USB-A Peripheral Device</b></li> </ul>
4 DC Power Input Port	<ul style="list-style-type: none"> <li>• Type-N barrel connector</li> <li>• 45W (20V 2.25A)</li> <li>• Connect the <b>Universal Power Adapter</b> to supply power to the <b>Docking Station</b></li> </ul>
5 HDMI Output Port	<ul style="list-style-type: none"> <li>• HDMI 2.0b</li> <li>• 4K @ 30Hz</li> <li>• Connect an <b>HDMI Display Device</b></li> </ul>
6 RJ45 Port	<ul style="list-style-type: none"> <li>• 10/100/1000 Mbps</li> <li>• Connect a <b>Network Cable</b> to establish a network connection</li> </ul>
7 LED Indicator	<ul style="list-style-type: none"> <li>• <b>Green</b> indicates the <b>Host Device</b> and <b>Power Source</b> are connected</li> </ul>

### Requirements

For the latest requirements and to view the full manual, please visit: [www.startech.com/DK30CHPH](http://www.startech.com/DK30CHPH).

- Host Computer with USB-C Port
  - DP-Alt Mode Compatible
  - USB PD Support

# Installation

**Notes:** Installation is automatic for all modern Operating Systems.

Shutting down the iPad Pro® (not sleep mode or restart) and leaving it connected to the Docking Station before powering it back on, may result in no HDMI video output. If this happens, disconnect and reconnect the 1M USB-C Cable (included) from the USB-C Host Port on the front of the Docking Station.

## Windows 7 (and earlier) Driver Installation

1. If the **Found New Hardware** dialog box appears on the screen, close the dialog box or click **Cancel**.

**Note:** Once the Docking Station is connected to the Host Device, and if no existing Drivers are found, the Docking Station will load a CD-ROM Device that contains an executable file that can be used to install the Driver.

2. After the CD-ROM Device finishes loading, run the **Installation File**.
3. Complete the on-screen instructions to finish the installation.

**Note:** Download the latest software from the StarTech.com website, [www.StarTech.com/DK30CHPH](http://www.StarTech.com/DK30CHPH).

## Connect a Host Device

- Connect the 1M USB-C Cable (included) to the **USB-C Host Port** on the front of the Docking Station and to the **USB-C Port** on a Laptop, Computer, Phone, or a Tablet.

## Connect USB Peripherals

- Connect up to two **USB 2.0 Peripherals** to the **USB 2.0 Ports** on the rear of the Docking Station.

### FCC Compliance Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Changes or modifications not expressly approved by StarTech.com could void the user's authority to operate the equipment.

### Industry Canada Statement

This Class B digital apparatus complies with Canadian ICES-003.

Cet appareil numérique de la classe [B] est conforme à la norme NMB-003 du Canada.

CAN ICES-3 (B)/NMB-3(B)

This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions: (1) This device may not cause interference, and (2) This device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

(1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

### Use of Trademarks, Registered Trademarks, and other Protected Names and Symbols

This manual may make reference to trademarks, registered trademarks, and other protected names and/or symbols of third-party companies not related in any way to StarTech.com. Where they occur these references are for illustrative purposes only and do not represent an endorsement of a product or service by StarTech.com, or an endorsement of the product(s) to which this manual applies by the third-party company in question. StarTech.com hereby acknowledges that all trademarks, registered trademarks, service marks, and other protected names and/or symbols contained in this manual and related documents are the property of their respective holders.

iPad Pro® is a trademark of Apple Inc., registered in the U.S. and other countries.

- and/or -

- Connect a **SuperSpeed USB 5Gbps (USB 3.2 Gen 1) Peripheral** to the **SuperSpeed USB Port** on the rear of the Docking Station.

## Connect a Display

- Connect an **HDMI M/M Cable** to the **HDMI Output Port** on the Docking Station and to the **HDMI Input Port** on the rear of the HDMI Display Device.

## Connect to a Network

- Connect a **Network Cable** to the **RJ45 Port** on the rear of the Docking Station and to the **Network Device**.

## Connect a Power Source

- Connect the **Universal Power Adapter** to the **DC Power Input Port** on the rear of the Docking Station and to an **AC Electrical Outlet**.

# Operation

## RJ45 Port LED Indicators

LED Color	Status	Indication
Green	Solid	• Link speed is either 1000 Mbps (1 GbE), 100 Mbps, or 10 Mbps
	Off	• No connection established
Amber	Flashing	• Network traffic detected
	On	• Link detected

### Warranty Information

This product is backed by a three-year warranty.

For further information on product warranty terms and conditions, please refer to [www.startech.com/warranty](http://www.startech.com/warranty).

### Limitation of Liability

In no event shall the liability of StarTech.com Ltd. and StarTech.com USA LLP (or their officers, directors, employees or agents) for any damages (whether direct or indirect, special, punitive, incidental, consequential, or otherwise), loss of profits, loss of business, or any pecuniary loss, arising out of or related to the use of the product exceed the actual price paid for the product. Some states do not allow the exclusion or limitation of incidental or consequential damages. If such laws apply, the limitations or exclusions contained in this statement may not apply to you.

### Safety Measures

- If product has an exposed circuit board, do not touch the product under power.

### Mesures de sécurité

- Si l'un des circuits imprimés du produit est visible, ne pas touchez le produit lorsqu'il est sous tension.

### 安全対策

- 製品に露出した状態の回路基盤が含まれる場合、電源が入っている状態で製品に触らないでください。

### Misure di sicurezza

- Se il prodotto ha un circuito stampato visibile, non toccare il prodotto quando è acceso.

### Säkerhetsåtgärder

- Rör aldrig vid enheter med oskyddade kretskort när strömmen är påslagen.

**StarTech.com Ltd.**  
45 Artisans Cres  
London, Ontario  
N5V 5E9  
Canada

**StarTech.com LLP**  
4490 South Hamilton  
Road  
Groveport, Ohio  
43125  
U.S.A.

**StarTech.com Ltd.**  
Unit B, Pinnacle 15  
Gowerton Rd,  
Brackmills  
Northampton  
NN4 7BW  
United Kingdom

FR: fr.startech.com  
DE: de.startech.com  
ES: es.startech.com  
NL: nl.startech.com  
IT: it.startech.com  
JP: jp.startech.com