




# HP Latex 3600 Printer

The horsepower you need for dedicated application production

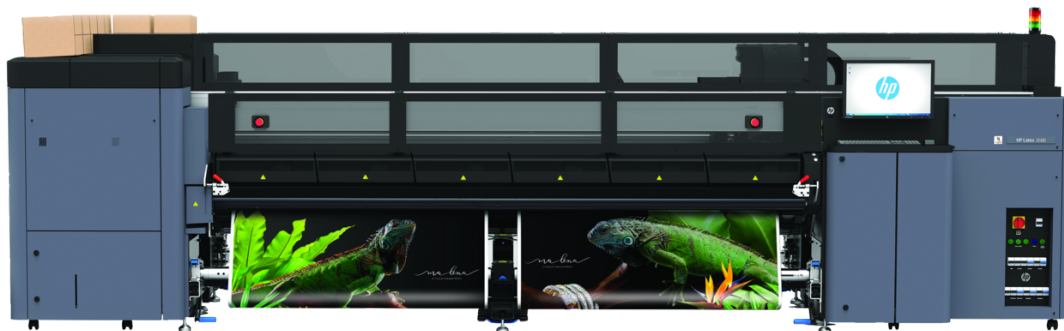

## See robust quality at every speed

- Print at high speeds—1290 ft<sup>2</sup>/hour<sup>1</sup>—and suppress banding with HP Dynamic Swath Alignment, OMAS technology.
- Superior indoor quality beats UV<sup>2</sup>—smooth transitions, sharp image quality, and preserve media texture.
- Handle demanding tiling jobs with confidence—color consistency  $\leq 1$  dE2000 (95% of colors) in tiling mode.<sup>3</sup>

## Maximize uptime, stay in control

- HP helps keep you up and running with direct support, including HP remote diagnostics.<sup>4</sup>
- Handle production peaks, without risk—this printer is designed and tested to support up to 350,000 ft<sup>2</sup>/mo.<sup>5</sup>
- Stay in control in-plant and online—HP Print Beat application<sup>4</sup> and printer status beacon.

## Help drive down costs

- You can save time and money—with automatic maintenance, no daily printhead maintenance is required.
- Minimize labor costs—a single operator can manage up to four printers at the same time.
- Help further reduce cost—heavy-duty rolls for fewer roll changes.

For more information, please visit <http://www.hp.com/go/latex3600>

Join the community, find tools, and talk to experts. Visit the HP Latex Knowledge Center at <https://lkc.hp.com/>

<sup>1</sup> Printed in Outdoor mode (3-pass, 6-color, 80%).

<sup>2</sup> Based on HP internal testing of prints produced using Indoor High Quality mode (6-pass, 6-color, 100%) at 830 ft<sup>2</sup>/hr (77 m<sup>2</sup>/hr) compared to similar performance of select UV printers under \$400,000 USD as of March 2017.

<sup>3</sup> The color variation inside a printed job, when printed with tiling optimized media, has been measured to be with maximum color difference  $\leq 1$  dE2000 (95% of colors) in "Optimize for tiling" mode. Tested on Ahlstrom 5087 wallpaper with stable printing condition within a stable media and a nominal printer. Reflective measurements on a 943 color target under CIE standard illuminant D50, and according to the standard CIEDE2000 as per CIE Draft Standard DS 014-6/E:2012. 5% of colors may experience variations above the specs mentioned. Backlit substrates measured in transmission mode may yield different results.

<sup>4</sup> HP remote monitoring and diagnostics—including access to the HP Print Beat application—requires an upgrade to the service contract with HP.

<sup>5</sup> Based on HP internal testing, the HP Latex 3600 Printer can reliably handle production peaks up to 350,000 ft<sup>2</sup> (35,000 m<sup>2</sup>) per month (in 6-pass print mode). Repeat monthly production at this volume is not recommended and may require additional maintenance.

Technical specifications

Print	
Printing modes	27 m²/hr - High Saturation Backlits (18p 6c 230%) 44 m²/hr - Textiles and Canvas (10p 6c 170%) 77 m²/hr - Indoor High Quality (6p 6c 100%) 120 m²/hr - Outdoor (3p 6c 80%) 180 m²/hr - Billboard (2p 4c 70%)
Print resolution	Up to 1200 x 1200 dpi
Ink types	Water-based HP Latex inks
Ink cartridges	7 (black, cyan, light cyan, light magenta, magenta, yellow, HP Latex Optimizer)
Cartridge size	5 L
Printheads	7 (2 cyan/black, 2 magenta/yellow, 2 light cyan/light magenta, HP Latex Optimizer)
Long-term print-to-print repeatability	Maximum color difference (95% of colors) ≤ 2 dE2000; ≤ 1 dE2000 in Tiling mode¹
Media	
Handling	Roll-to-roll, roll-to-freefall, roll-to-collector, dual-roll, double sided blackout, double-sided backlit (optional), ink collector (optional)
Media types	Banners, self-adhesive vinyls, films, papers, wallcoverings, canvas, synthetics, fabrics, mesh, textiles²
Roll size	Up to 3.2 m (single roll); Up to 2 x 1.55 m (dual roll)
Maximum roll weight	Up to 300 kg (single roll); Up to 2 x 200 kg (dual roll)
Maximum roll diameter	40 cm
Thickness	Up to 0.4 mm (default); up to 2.0 mm (with custom carriage height setting)
Applications	Banners; Displays; Exhibition and event graphics; Exterior signage; Indoor posters; Light boxes - film; POP/POS; Textile; Vehicle graphics
Connectivity	
Interfaces	Gigabit Ethernet (1000Base-T)
Dimensions (W x D x H)	
Printer	598 x 172 x 187 cm
Shipping	586 x 193 x 216 cm
Weight	
Printer	1880 kg
Shipping	2640 kg
What's in the box	HP Latex 3600 Printer, HP 881 Latex Printheads, HP 881 Latex Cleaning Roll, 126-in spindles (x2), HP Latex Dual Roll Split Spindles (x4), HP Latex dual roll center support and docking plate, HP Internal Print Server, documentation software, user manual, media edge holders (x4), in-line slitters (x4), Original HP sample media, cleaning supplies, spindle supports (x2), pneumatic gun
Environmental ranges	
Operating temperature	15 to 30°C
Operating humidity	20 to 70% RH (non-condensing)
Acoustics	
Sound pressure	<67 dB(A) (operating), <60 dB(A) (idle)
Power	
Consumption	10-13 kW (printing), 550 W (ready), 150 W (shutdown)
Certification	
Safety	IEC 60950-1+A1+A2 compliant; United States and Canada (CSA listed); EU (LVD and MD compliant, EN60950-1, EN12100-1, EN ISO13849-1, EN60204-1, and EN1010-1); Russia, Belarus and Kazakhstan (EAC); Australia, New Zealand (RCM)
Electromagnetic	Compliant with Class A requirements, including: USA (FCC rules), Canada (ICES), EU (EMC Directive), Australia (ACMA), New Zealand (RSM), Korea (KCC)
Environmental	WEEE; EU RoHS; China RoHS; REACH; CE marking compliant
Warranty	Two-year limited hardware warranty

Ordering information

Product	
1HA07B	HP Latex 3600 Printer
Accessories	
1ML40A 4J0X0A 4R4W4A CZ059A CZ065A F1V49A G1K80B J8J14A L2E28A L5E74C M2J33A T4E58B Z3R55A	HP Latex 3000 Edge Holder Kit Day Night Compatible HP 126-in Dual Roll Kit HP 126-in Spindle HP Series 1000/3000 126-in Carbon Fiber Spindle HP Latex 3000 Ink Collector Kit HP Latex 3000 Ink Collector Foams Kit HP 126-in Dual Roll Spindle HP Latex 3000 Double-sided Day Night Kit HP Latex Jumbo Dual Roll Split Spindles HP Large Format Caldera Grand RIP Software HP Latex In-line Slitters HP Latex Media Saver Kit HP Latex 3000 Day Night Edge Holder Kit
Original HP printing supplies	
CR327A CR328A CR329A CR330A CR331A CR332A CR333A CR334A CR335A CR336A CR337A CR339B	HP 881 Yellow/Magenta Latex Printhead HP 881 Cyan/Black Latex Printhead HP 881 Light Magenta/Light Cyan Latex Printhead HP 881 Latex Optimizer Printhead HP 881 5-liter Cyan Latex Ink Cartridge HP 881 5-liter Magenta Latex Ink Cartridge HP 881 5-liter Yellow Latex Ink Cartridge HP 881 5-liter Black Latex Ink Cartridge HP 881 5-liter Light Cyan Latex Ink Cartridge HP 881 5-liter Light Magenta Latex Ink Cartridge HP 881 5-liter Latex Optimizer Cartridge HP 881 Latex Cleaning Roll
Original HP large format printing materials	
HP Permanent Gloss Adhesive Vinyl (REACH certified³) HP Backlit Polyester Film⁴ HP PVC-free Durable Smooth Wall Paper (REACH³, FSC⁵, UL GREENGUARD GOLD certified⁶) HP Premium Poster Paper⁴ (FSC® certified⁵)	
For the entire HP Large Format Printing Materials portfolio, please see HPLFMedia.com.	
Service and Support	
1UH14A/1HA07-67066 HP Latex 3000 Standard Uptime Kit 1VT19A /1HA07-67008 HP Latex 3000 Maintenance Kit For HP Care Packs and extend the service coverage visit options https://cpc.ext.hp.com	

¹ Reflective measurements on a 943 color target under CIE standard illuminant D50, and according to the standard CIEDE2000 as per CIE Draft Standard DS 014-6/E:2012. Backlit substrates measured in transmission mode may yield different results.

² Performance may vary depending on media—for more information, see <http://www.hp.com/go/mediasolutionslocator>. For best results, use textiles that do not stretch. The optional ink collector is required for porous textiles.

³ This product does not contain substances listed as SVHC (155) per Annex XIV of the EU REACH directive published as of June 16, 2014 in concentrations exceeding 0.1%. To determine the status of SVHC in HP products, see the HP REACH Declaration published at HP Printing Products and Consumable Supplies.

⁴ HP Large Format Media take-back program availability varies. Some recyclable HP papers can be recycled through commonly available recycling programs. Recycling programs may not exist in your area. See <http://www.HPLFMedia.com/hp/ecosolutions> for details.

⁵ BMG trademark license code FSC®-C115319, see <http://www.fsc.org>. HP trademark license code FSC®-C017543, see <http://www.fsc.org>. Not all FSC®-certified products are available in all regions.

⁶ UL GREENGUARD GOLD Certification to UL 2818 demonstrates that products are certified to UL's GREENGUARD standards for low chemical emissions into indoor air during product usage. For more information, visit <http://www.ul.com/gg> or <http://www.greenguard.org>.

