


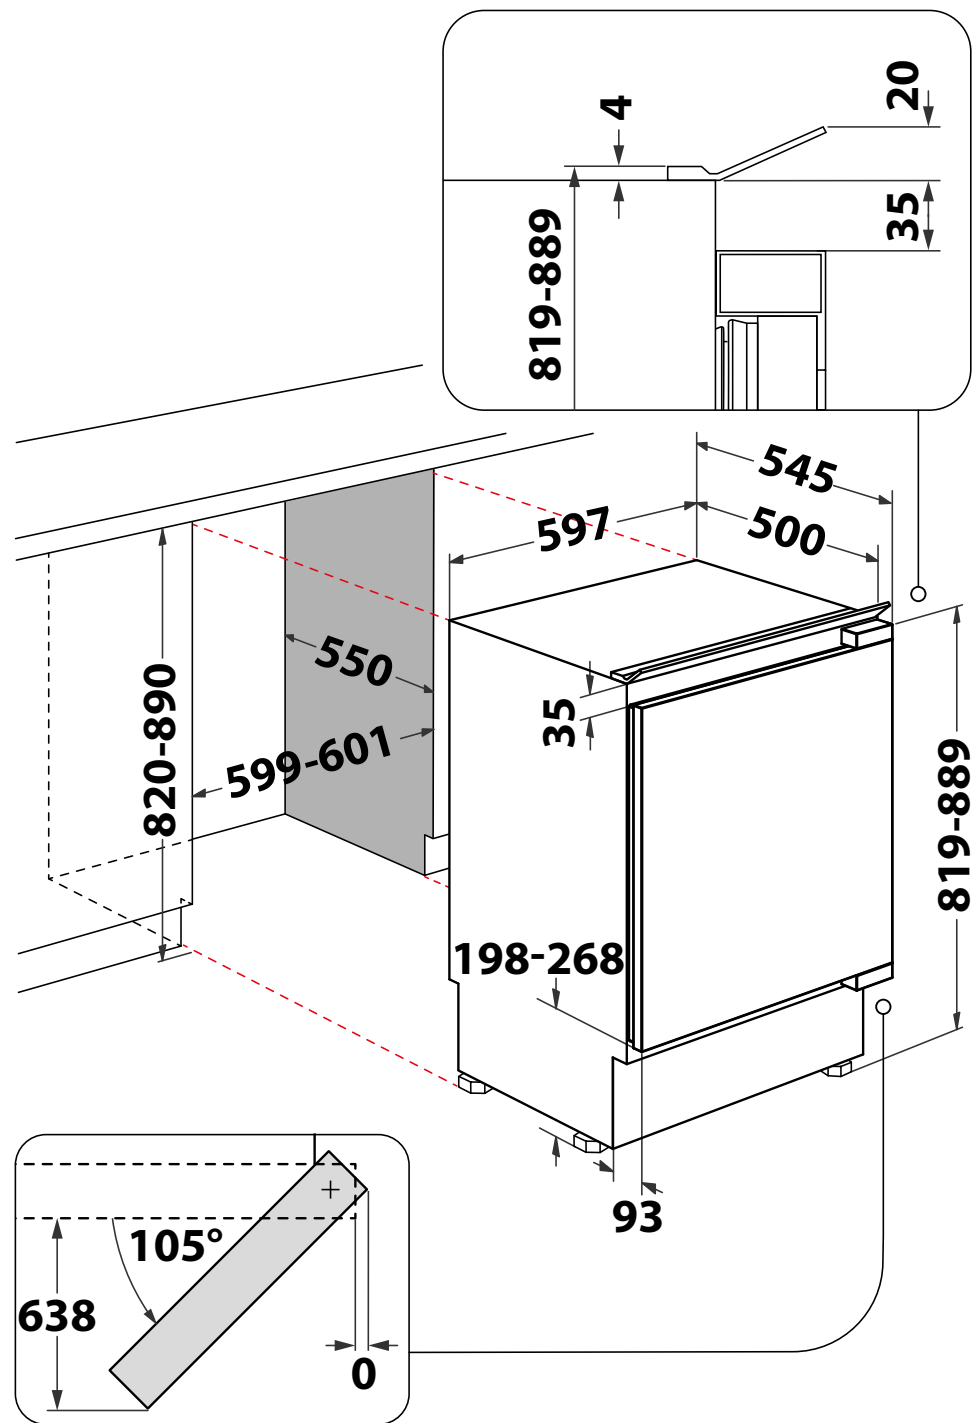

| DIMENSION                                                                                                                        | MEASURE |    | DIMENSION                                                                                                                        | MEASURE          |    |
|----------------------------------------------------------------------------------------------------------------------------------|---------|----|----------------------------------------------------------------------------------------------------------------------------------|------------------|----|
| WOODEN CABINET - Overall Wooden Cabinet - BI                                                                                     |         |    | APPLIANCE                                                                                                                        |                  |    |
| 01. Height MIN of the tall cabinet Niche, including all required space for installation or ventilation (HMIN_T)                  | 820     | mm | Overall Appliance                                                                                                                |                  |    |
| 02. Height MAX of the tall cabinet Niche, including all required space for installation or ventilation (HMAN_T)                  | 890     | mm | 01. Height MIN Product, watch the detail drawing for the exact position of the dimension line (HMIP)                             | 819              | mm |
| 03. Width MIN of the tall cabinet Niche, including all required space for installation or ventilation (WMIN_T)                   | 600     | mm | 02. Height MAX product, watch the detail drawing for the exact position of the dimension line (HMAP)                             | 889              | mm |
| 04. Width MAX of the tall cabinet Niche, including all required space for installation or ventilation (WMAN_T)                   | 600     | mm | 03. Width product, watch the detail drawing for the exact position of the dimension line (WP)                                    | 597              | mm |
| 05. Depth of the tall cabinet Niche, including all required space for installation or ventilation (DN_T)                         | 550     | mm | 04. Depth product without front, watch the detail drawing for the exact position of the dimension line (DP)                      | 500              | mm |
| 06. Height MIN of the base cabinet Niche, including all required space for installation or ventilation (HMIN_B)                  | 820     |    | 05. Depth product, watch the detail drawing for the exact position of the dimension line (D)                                     | 545              | mm |
| 07. Height MAX of the base cabinet Niche, including all required space for installation or ventilation (HMAN_B)                  | 890     |    | 06. Depth MIN plinth return front (DMIPRF)                                                                                       | 0                | mm |
| 08. Width MIN of the base cabinet Niche, including all required space for installation or ventilation (WMIN_B)                   | 599     |    | 07. Depth MAX plinth return front (DMAPRF)                                                                                       | 93               | mm |
| 09. Width MAX of the base cabinet Niche, including all required space for installation or ventilation (WMAN_B)                   | 601     |    | 08. Height MIN Plinth return. This dimension is taken by minimum appliance height (HMIPR)                                        | 198              | mm |
| 10. Depth of the base cabinet Niche, including all required space for installation or ventilation (DN_B)                         | 550     |    | 09. Height MAX Plinth return. This dimension is taken at minimum appliance height (HMAPR)                                        | 268              | mm |
| 11. Indicates whether a ventilation opening is needed or not. Default is "N"                                                     | No      |    | Door or Drawer                                                                                                                   |                  |    |
| 12. Appliance can be used as base for other appliances from the same manufacturer. Default is "N"                                | Yes     |    | 10. Height front. When appliance has more than one front, only the most bottom left front is discribed here (HF)                 | 0                | mm |
| WOODEN CABINET - Door – Drawer                                                                                                   |         |    | 11. Width front. When appliance has more than one front, only the most bottom left front is discribed here (WF)                  | 597              | mm |
| 13. Height MIN Decorative Front, if appliance has more than one front, only the most bottom left front is described here (HMIF)  | 645     | mm | 12. Depth front (DF)                                                                                                             | 0                | mm |
| 14. Width MIN Decorative Front, if appliance has more than one front, only the most bottom left front is described here (WMIF)   | 586     | mm | 13. Maximum depth all protruding elements, e.g. handles, controls (DC)                                                           | 0                | mm |
| 15. Weight/Thickness of the decorative bottom front panel of the Kitchen manufacturer needs (essential)                          | Yes     |    | 14. Lateral clearance between front edge and most protruding elements which avoid to open a neighbour front more than 90° (CC)   | 0                | mm |
| 16. Weight MAX of the decorative bottom front panel of the Kitchen manufacturer (WEMAF)                                          | 0       | kg | 15. Projection of front in relation to housing of appliance (FPT)                                                                | 20               | mm |
| 17. Thickness MIN Decorative Front, if appliance has more than one front only the most bottom left front is described here(TMIF) | 0       | mm | 16. Projection of front in relation to bearing area of the appliance. Taken at MIN height of appliance if adjustable height(FPB) | 0                | mm |
| 18. Thickness MAX Decorative Front, if appliance has more than one front only the most bottom left front is described here(TMAF) | 0       | mm | 17. Height Product Panel. When product panel is missing, set to 0 (HMAPP)                                                        | 35               | mm |
| Additional Fronts (2 doors)                                                                                                      |         |    | 18. Lateral projection of front including controls when door is opened totally. At the side where the hinge is mounted (FPOD)    | 0                | mm |
| 19. Height MIN Decorative Front, when appliance has more than one front, upper front is discribed here (HMIFU)                   | 0       | mm | 19. Space in front, which is required to guarantee full operability. The most protruding part gives this dimension (RSF)         | 638              | mm |
| 20. Width MIN Decorative Front, when appliance has more than one front, upper front is discribed here (WMIFU)                    | 0       | mm | 20. Lateral projection of opened front at the side where the hinge is fixed (FPD)                                                | 0                | mm |
| 21. Weight/Thickness of the decorative upper front panel of the Kitchen manufacturer needs (essential)                           | Yes     |    | 21. Door hinge positiong and tipology                                                                                            | Right-changeable |    |
| 22. Weight MAX of the decorative upper front panel of the Kitchen manufacturer (WEMAFU)                                          | 0       | kg | 22. Type of preparation to fix the cover door                                                                                    | Fixed mounting   |    |
| 23. Thickness MIN Decorative Front, when appliance has more than one front, upper front is discribed here (TMIFU)                | 0       | mm | 23. Maximum angle when door is opened totaly (AOD)                                                                               | 105              | °  |
| 24. Thickness MAX Decorative Front, when appliance has more than one front, upper front is discribed here (TMAFU)                | 0       | mm | 24. Maximum thickness of the upper front panel (TUFP)                                                                            | 4                | mm |
|                                                                                                                                  |         |    | Additional Fronts (2 doors)                                                                                                      |                  |    |
|                                                                                                                                  |         |    | 25. Height front, when appliance has more than one front, upper front is discribed here (HUF)                                    | 0                | mm |
|                                                                                                                                  |         |    | 26. Width front, when appliance has more than one front, upper front is discribed here (WUF)                                     | 0                | mm |
|                                                                                                                                  |         |    | 27. Useful space between the 2 doors, including hinges size (HMAFG)                                                              | 20               | mm |
|                                                                                                                                  |         |    | 28. Distance between the bottom of the product and the center line between the fridge doors (HFG)                                | 0                | mm |

|                                                                                           |     |     |
|-------------------------------------------------------------------------------------------|-----|-----|
| <b>TALL WOODEN CABINET - Vent-shaft incoming</b>                                          |     |     |
| 25. Indicates the position of the freespace for the incoming airflow, tall wooden cabinet | -   |     |
| 26. Clearance MIN Ventilation, tall wooden cabinet (CMIV_TI)                              | 0   | mm  |
| 27. Ventilation cavity minimum, tall wooden cabinet (VC_TI)                               | 0   | cm² |
| <b>TALL WOODEN CABINET - Vent-shaft outgoing</b>                                          |     |     |
| 28. Indicates the position of the freespace for the outgoing airflow, tall wooden cabinet | -   |     |
| 29. Clearance MIN Ventilation, tall wooden cabinet (CMIV_TO)                              | 0   | mm  |
| 30. Ventilation cavity minimum, tall wooden cabinet (VC_TO)                               | 200 | cm² |
| <b>BASE WOODEN CABINET - Vent-shaft incoming</b>                                          |     |     |
| 31. Indicates the position of the freespace for the incoming airflow, base wooden cabinet | -   |     |
| 32. Clearance MIN Ventilation, base wooden cabinet (CMIV_BI)                              | 0   | mm  |
| 33. Ventilation cavity minimum, base wooden cabinet (VC_BI)                               | 0   | cm² |
| <b>BASE WOODEN CABINET - Vent-shaft outgoing</b>                                          |     |     |
| 34. Indicates the position of the freespace for the outgoing airflow, base wooden cabinet | -   |     |
| 35. Clearance MIN Ventilation, base wooden cabinet (CMIV_BO)                              | 0   | mm  |
| 36. Ventilation cavity minimum, base wooden cabinet (VC_BO)                               | 0   | cm² |