


Omada Unmanaged Switch | Datasheet

DS108GP




Omada 8-Port Gigabit Unmanaged Desktop Switch with 8-Port PoE+

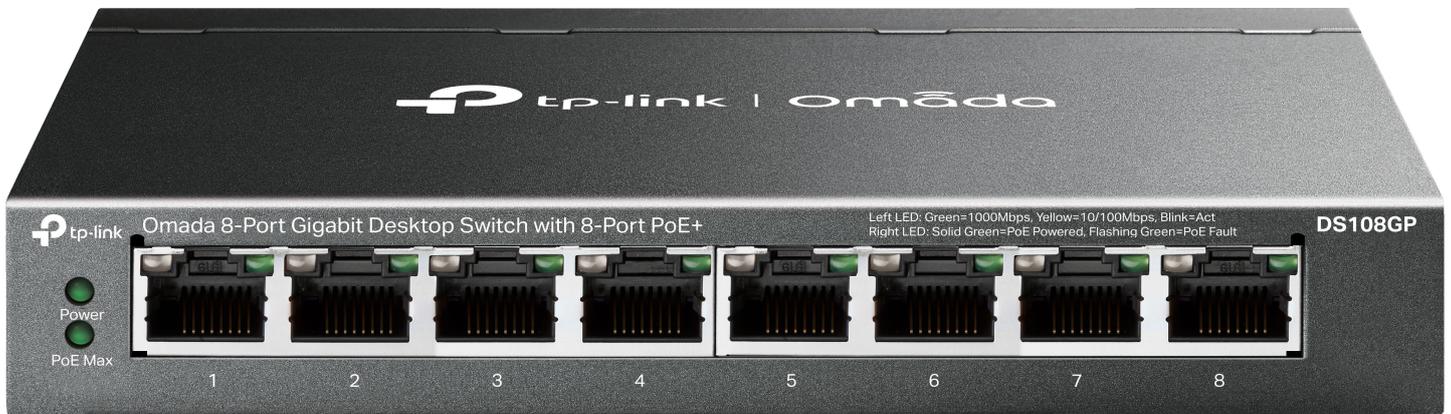

Highlights

- 8× 10/100/1000 Mbps RJ45 ports
- 8× PoE+ ports transfer data and power on individual cables
- Works with IEEE 802.3af/at compliant PDs
- 802.1p/DSCP QoS enable smooth latency-sensitive traffic
- Supports PoE power up to 30 W for each PoE port
- Supports PoE power up to 65 W for all PoE ports
- Up to 250m (820ft) data and power transmitting range under Extend Mode
- PoE Auto Recovery guarantees stable operation of PoE devices by automatically rebooting the dropped or unresponsive PD devices
- Plug and Play. No configuration or central management required.

Product Pictures

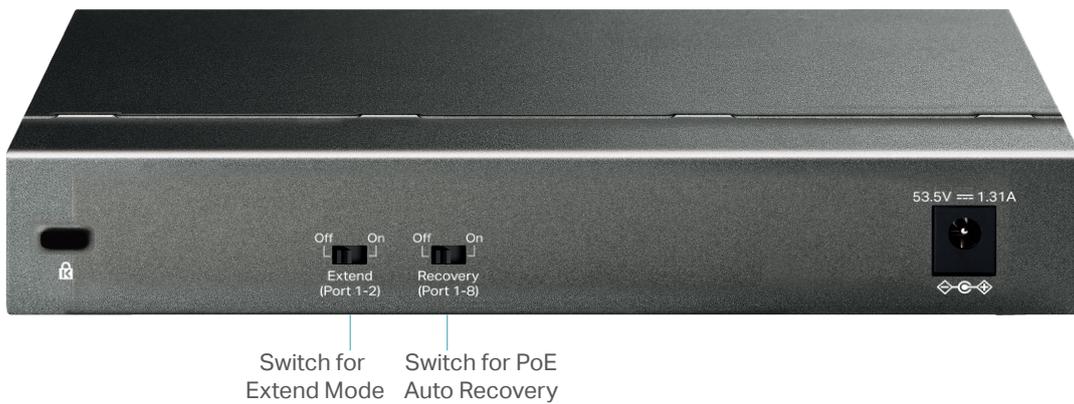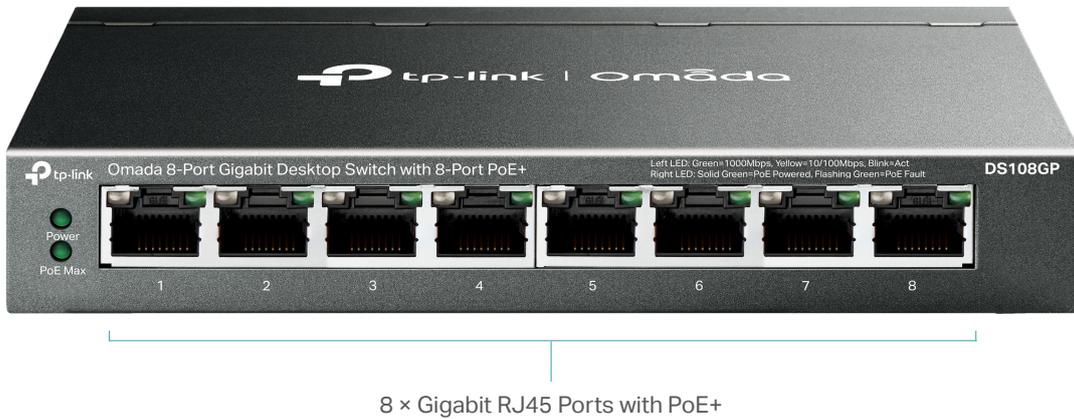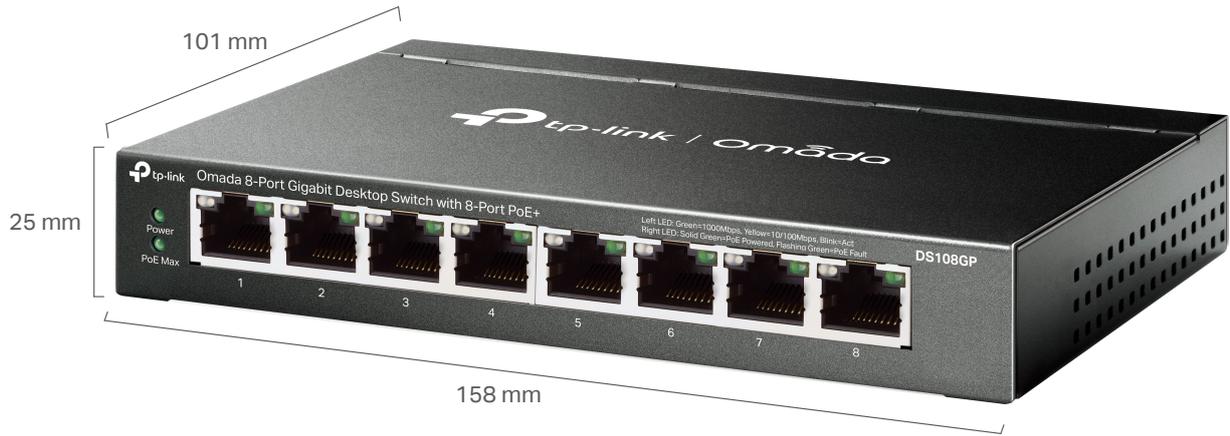

Specifications

Model	DS108GP
Interface	<ul style="list-style-type: none">• 8× 10/100/1000 Mbps RJ45 Ports• AUTO Negotiation/AUTO MDI/MDIX
Network Media (Cable)	<ul style="list-style-type: none">• 10BASE-T: UTP category 3, 4, 5 cable (maximum 100m)• 100BASE-TX: UTP category 5 or above cable (maximum 100m)• 1000BASE-T: UTP category 5e or above cable (maximum 100m)
Max Power Consumption	76.59 W
Max Heat Dissipation	260.41 BTU/h
PoE Ports (RJ45)	<ul style="list-style-type: none">• Standard: 802.3af/at compliant• PoE Ports: Ports 1–8• Power Supply: 65 W
Packet Forwarding Rate	11.90 Mpps
Transmission Method	Store-And-Forward
Switching Capacity	16 Gbps
MAC Address Table	4K
Packet Buffer Capacity	1.5 Mbit
Jumbo Frame	16 KB
Advanced Functions	<ul style="list-style-type: none">• Compatible With IEEE 802.3af/at Compliant PDs• IGMP Snooping• Mac Address Auto-Learning And Auto-Aging• IEEE802.3x Flow Control• 802.1p/DSCP QoS• Extend Mode Button (Ports 1–2, Up to 250 m PoE power supply and data transmission)• PoE Auto Recovery (Ports 1-8)
Fan Quantity	Fanless
Physical Security Lock	Yes
External Power Supply	External Power Adapter (Output: 53.5 VDC / 1.31 A)
Dimensions (W x D x H)	6.2×4.0×1.0 in (158×101×25 mm)
Certification	FCC, CE, RoHS
Package Contents	Switch, Power Adapter, Installation Guide
Environment	<ul style="list-style-type: none">• Operating Temperature: 0–40 °C (32–104 °F)• Storage Temperature: -40–70 °C (-40–158 °F)• Operating Humidity: 10–90% RH non-condensing• Storage Humidity: 5–90% RH non-condensing

Disclaimers

The speed of the ports in extend mode will downgrade to 10 Mbps. The actual transmission distance may vary due to power consumption of PoE-powered devices or the cable quality and type.

PoE budget calculations are based on laboratory testing. Actual PoE power budget is not guaranteed and will vary as a result of client limitations and environmental factors.

Omada Unmanaged Switches do not support Omada SDN central management.

www.tp-link.com

Specifications are subject to change without notice. All brands and product names are trademarks or registered trademarks of their respective holders. © 2024 TP-Link