

BPS240V7A/BPS240V9A

EXTENDED BATTERY MODULE TO PROLONG RUNTIME

The battery module ensures extended system runtime during power outages


Designed for data centre and critical applications, the Extended Battery Module (EBM) Series can be used in conjunction with compatible UPS systems to provide prolonged system runtime during power interruption. The battery modules come with DC plug-and-play power connectors to allow for adding multiple EBMs. The sealed lead-acid batteries used within the EBMs are stable and safe, which ensure the power system's reliable performance.

SERIES FEATURES

- Sealed Lead-acid Batteries
- EBM Expansion Capability
- Metal Housing

PRODUCT CALLOUTS

- 1 . Battery Output
- 2 . Battery Input
- 3 . DC Breaker
- 4 . EBM Detection Connector

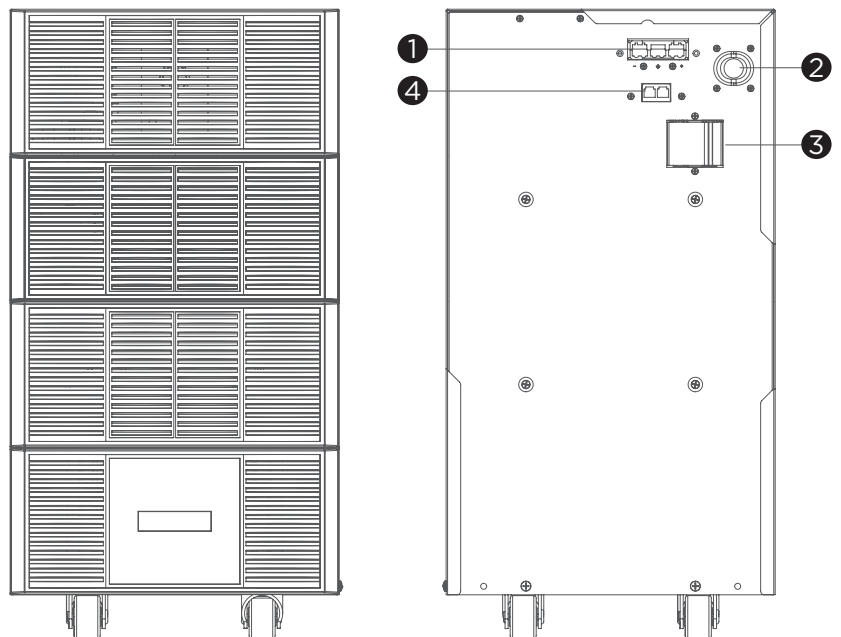

BPS240V7A/BPS240V9A



TECHNICAL SPECIFICATIONS

| Model Name | BPS240V7A | | BPS240V9A | |
|--|------------------|--|-----------|--|
| General | | | | |
| Nominal Output Voltage (Vdc) | 240 | | | |
| Rated Output Current (A) | 75 | | | |
| Battery | | | | |
| Battery Type | Sealed Lead-acid | | | |
| Built-in Charger | No | | | |
| Typical Recharge Time (Hours) | 4 | | | |
| Expansion Ready | Yes | | | |
| Parallel Expansion (Max. Units) | 10 | | | |
| Compatible UPS | OLS6KE | | OLS10KE | |
| Physical | | | | |
| Form Factor | Tower | | | |
| Physical Size | | | | |
| Dimensions (WxHxD) (mm.) | 270 x 520 x 460 | | | |
| Weight (kg.) | 120 | | | |
| Environmental | | | | |
| Operating Temperature (°C) | 0 - 40 | | | |
| Operating Relative Humidity (Non-condensing) (%) | 0 - 90 | | | |
| Certifications | | | | |
| Certifications* | CE, RCM | | | |
| RoHS | Yes | | | |

*Certifications may vary according to different regions. Visit www.cyberpower.com for more information.
#All specifications are subject to change without notice.

