

Model: GP1200V

AC1200


Wireless Dual-Band
Gigabit VoIP xPON Router

- ✓ AC1200 Dual-Band Wi-Fi
- ⚙️ Powerful 1.1 GHz Dual-Core Processor
- 🌐 GPON/EPON and Four Gigabit RJ45 Ports
- ☎️ VoIP via a FXS RJ11 Port
- 🔄 TR069/TR098/TR111/TR143/TR181/OMCI/OAM

[Datasheet](#)




Hardware

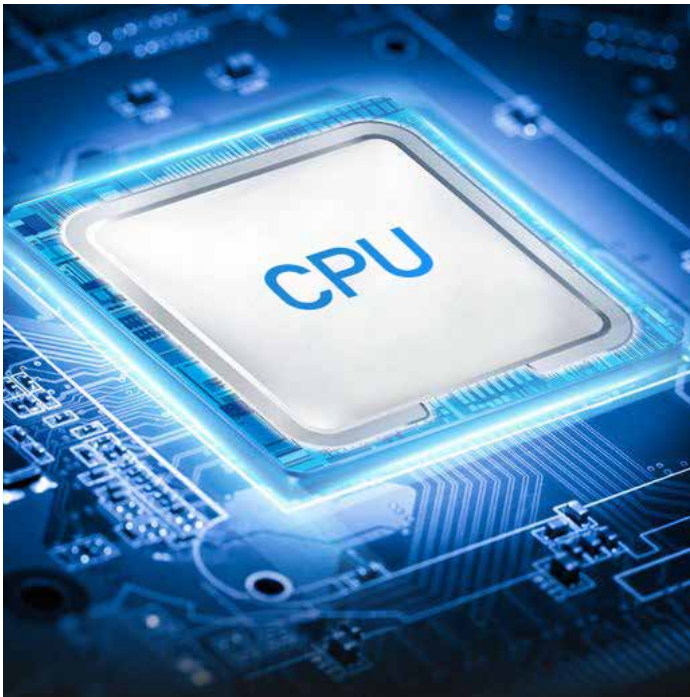


Powerful Dual-Core Processor

Keeps network fast and responsive with a 1.1 GHz dual-core CPU, improving online experience and solidifying your service reputation.

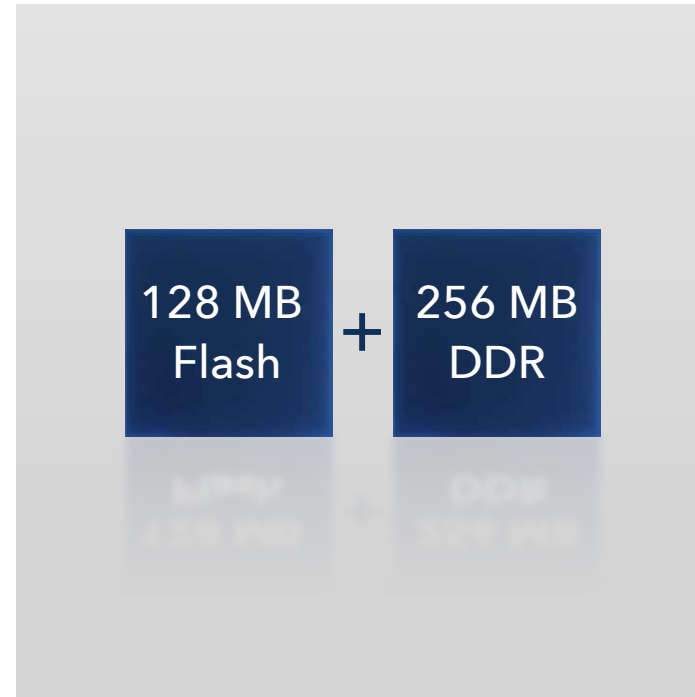

More Features, More Capacity

Large flash allows adding features to tailor ISP's needs. High RAM allows connecting more devices at the same time without slowing down.

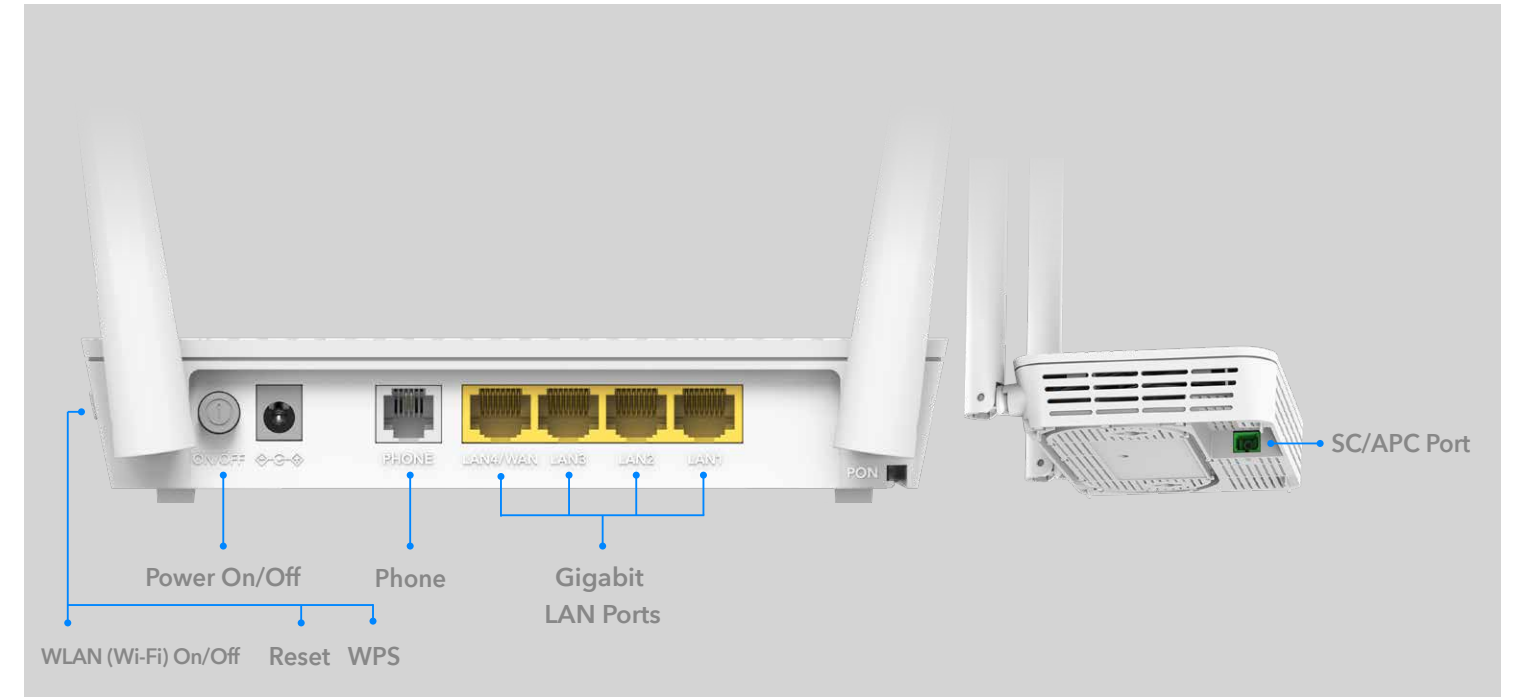

Crystal-Clear VoIP

Add value to your service with phone call subscription. The RJ11 allow user to connect a phone to it to have crystal-clear calling.

Four Gigabit Ports

Provides decent wired connectivity, and removes the need to installing extra switch for large premises' wiring scenarios..

Software



IPv6

Supports more secure and advanced IPv6 protocol, enabling ISP to scale up their network high-performance with the latest features in efficiency, and compatibility.



OMCI/OAM

Reduces procedures and expenses in the first-time installation and the future maintenance with OMCI/OAM support.



IPTV

Enable IPTV service via IGMP Proxy/Bridge/Tag VLAN to satisfy customers' need and diversify your service scope.



Highlight

- A GPON and EPON ONT with AC1200 Wi-Fi for FTTH deployment
- Crystal-Clear VoIP Calling via the RJ11 port
- Compatible with TR069/TR098/TR143/OMCI/OAM
- Advanced QoS enables the fine-tuning of low-latency application experiences

Hardware

Processor	RTL9607C-VB6+8812FR+8192FR
Flash	1 Gbit (128 MB)
DDR	2 Gbit (256 MB)
Antennas	2× Fixed Omni-Directional Antennas
Interfaces	1× SC/APC Port
	4× 10/100/1000 Mbps RJ45 LAN Ports
	1× USB-A 2.0 (Optional for ISP orders)
	1× RJ11 Port
LED	1× DC Jack
	Power, PON, LOS, Internet, LAN 1~4, 2.4 GHz Wi-Fi, 5 GHz Wi-Fi, WPS, USB (Optional), Phone
Buttons	Power On/Off, Wi-Fi On/Off, WPS Button, Reset Button
External Power Supply	12 V / 1 A
Dimension (W x D x H)	173×123.8×33 mm (6.81×4.87×1.3 inches)

xPON

Protocols	GPON (ITU-T G. 984)
	EPON (802.3ah)
Upstream Speed	1.244 Gbps (GPON), 1.25 Gbps (EPON)
Downstream Speed	2.488 Gbps (GPON), 1.25 Gbps (EPON)
Wavelength	TX: 1310 nm
	RX: 1490 nm
Max Transmission Distance	20 km

Wireless

Wireless Standards	IEEE 802.11ac/n/a 5 GHz
	IEEE 802.11n/b/g 2.4 GHz
Frequency	5 GHz, 2.4 GHz
Signal Rate	867 Mbps (5 GHz), 300 Mbps (2.4 GHz)
	Compatible with 802.11a/b/g/n/ac Wi-Fi standards
Transmit Power	CE: <20dBm(2.4 GHz), <23dBm(5.15 GHz~5.25 GHz)
	FCC:<30dBm(2.4 GHz & 5.15 GHz~5.825 GHz)
Wireless Features	Beamforming
Wireless Encryptions	WPA-PSK, WPA2-PSK, WPA-PSK/WPA2-PSK



Software

WAN Type	Dynamic IP/Static IP/PPPoE
DHCP	Server, DHCP Client List, Address Reservation
Dynamic DNS	DynDNS, TZO, No-IP
Guest Network	2.4 GHz Guest Network × 1
	5 GHz Guest Network × 1
NAT	Port Forwarding, Port Triggering, UPnP, DMZ
Working Mode	xPON Wi-Fi Router
Security	SPI Firewall/IP Filter/MAC Filter/Domain Filter
QoS	4 Queues/Port/MAC/802.1p/DSCP/Traffic Shaping
CWMP	TR069 / TR098 / TR111 / TR143 / TR181
OMCI	ITU-T G.988
Management	Local Management via Web Page
VLAN	Tag VLAN
Internet Protocols	IPv4 / IPv6
IPv6	Dynamic (SLAAC/DHCPv6)
	Static (Fixed IP)

Others

Package	xPON Wi-Fi Router
Content	Power Adapter
	RJ45 Ethernet Cable
	Quick Installation Guide
Certificate	CE, FCC, RoHS
Environmental Requirements	Operating Temperature: 0 °C ~ 40 °C (32 °F ~ 104 °F)
	Storage Temperature: -40 °C ~ 70 °C (-40 °F ~ 158 °F)
	Operating Humidity: 10% ~ 90% non-condensing
System Requirements	Storage Humidity: 5% ~ 90% non-condensing
	Windows, macOS, Android, iOS, or other OS with networking capability
	Firefox, Chrome, Safari, Edge, or other up-to-date web browsers.
An OLT and optical fibers are required for providing network access.	