



TruTile™ Designs

ACOUSTIC WALL TILE

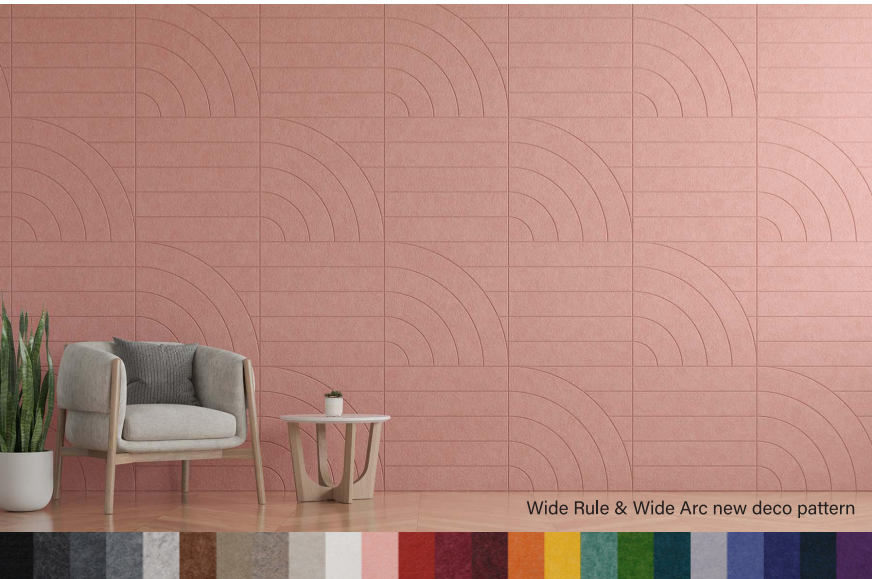


Pattern detail




Solid colors

DESIGNS (8% scale)

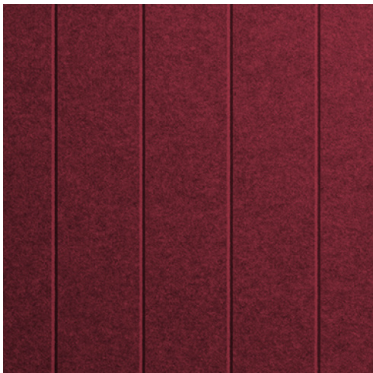


Wide Rule
(Berry)

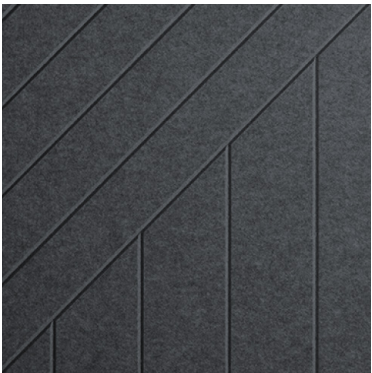

Wide Slant
(Slate)



Wide Arc
(Blush)

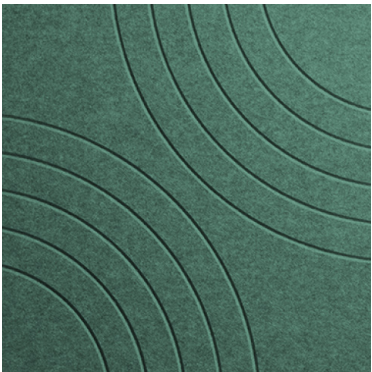


Double Arc
(Seafoam)

FEATURES


9mm thick, 2' x 2' square sound absorbing wall tiles available in 4 designs or solid panels that can be arranged to create a myriad of unique patterns.

Wide range of color options provides design flexibility and personalization for any project.

DIMENSIONAL DATA




2' x 2' Tile




Wide Rule & Wide Arc
new deco pattern


PATTERN INSPIRATIONS

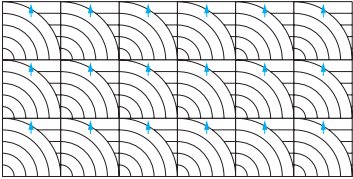


Wide Arc vertical pattern

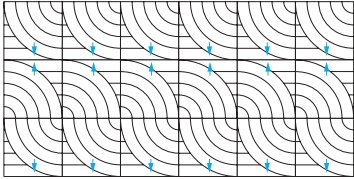


Wide Arc weave pattern

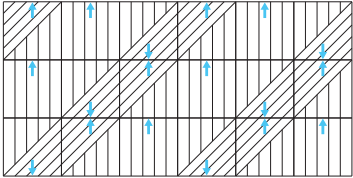


Wide Slant & Wide Rule stripe pattern

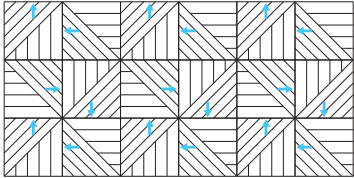


Wide Slant pinwheel pattern

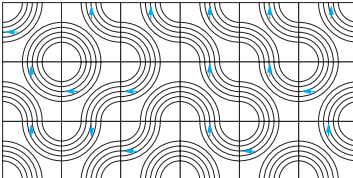


Double Arc organic pattern

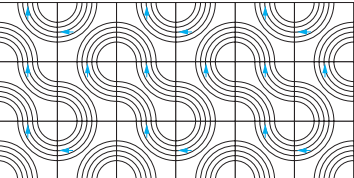

Double Arc infinity pattern

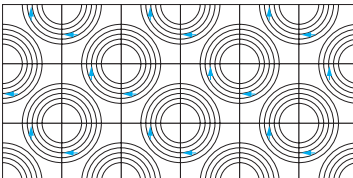

Double Arc circles pattern

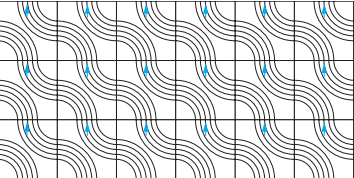

Double Arc vertical pattern



ORDERING

Series	AUTT	AUTT
TruTile	AUTT	
Size		22
2' x 2' panel	22	
Shape		SQ
Square	SQ	
Design		
Wide Rule	WRL	
Wide Arc	WAC	
Wide Slant	WST	
Double Arc	DAC	
Solid	SD	
Mounting		SM
Surface Mount by others	SM	
(Construction glue direct to surface recommended)		
Acoustic Tile Color		
See page 3 for color offering		

SPECIFICATIONS

Acoustic Material

Content	Material is 100% polyester containing up to 50% of recycled plastic bottles (PET felt) and is moisture resistant. See Acoustic Materials page for color offering. Colors are subject to change without notice. For the most current color options, please visit focalpointlights.com/acousticsolutions . Lead times vary depending on color.
Cleaning and Care	Remove dust and debris with a clean, soft, lint-free cloth or vacuum
PET Thickness	9mm
Surface Burning Characteristics	ASTM E84 Class A / CAN ULC S102 Flame Spread: 0 Smoke Development Index: 300

Acoustic Performance

Acoustic testing is performed on all Focal Point acoustic products and varies based on installation and configuration. ASTM C423 test reports can be downloaded from focalpointlights.com. Contact acoustic.solutions@focalpointlights.com for technical questions.

NRC	Noise Reduction Coefficient (NRC) is the average of how absorptive a material is at various frequencies within the human speech frequency range. Two materials with the same rating may not perform the same in application. Typically, an NRC of 0 indicates perfect reflection, and an NRC of 1 is designated as perfect absorption. However, based on the testing methodology and depending upon the material's shape or surface area products can test at an NRC greater than 1. NRC = 0.30
-----	--

Weight

1.8 lbs per tile. Ships up to (12) twelve per box = 25.25" x 25.25" x 5".

Reliability

At Focal Point, our products are designed to stand the test of time. Each product is engineered using superior components, manufactured with the utmost care and rigorously tested.


Warranty

1-year limited warranty.

STANDARD PET



PREMIUM PET

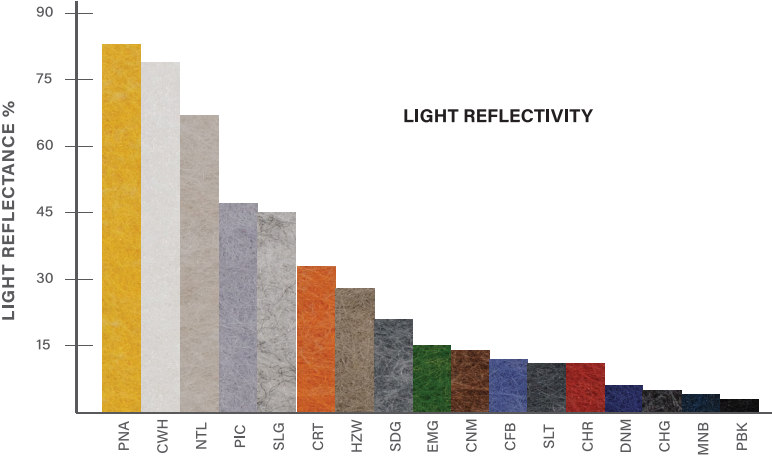

Declare.

PET
Focal Point, LLC

Final Assembly: Chicago, Illinois, USA
Life Expectancy: 30 Year(s)
End of Life Options: Salvageable/Reusable in its Entirety, Recyclable (100%)

Ingredients:

Polyethylene terephthalate: PET; **N, N'-Ethylene bisstearamide:** Octadecanamide, N,N'-1,2-ethanediylbis-; **Stearic Acid:** Stearic Acid; **Antioxidant 1076:** Benzenepropanoic acid, 3,5-bis(1,1-dimethylethyl)-4-hydroxy-, octadecyl ester; **Antioxidant KY-405:** Benzenamine, 4-(1-methyl-1-phenylethyl) -N-[4-(1-methyl-1-phenylethyl)phenyl]; **Titanium Dioxide:** Titanium dioxide

Living Building Challenge Criteria:

I-13 Red List:

- ☒ LBC Red List Free
- ☐ LBC Red List Approved
- ☐ Declared

% Disclosed: 100% at 100ppm
VOC Content: Not Applicable

I-10 Interior Performance: Not Compliant
I-14 Responsible Sourcing: Not Applicable

FPL-0001
EXP. 01 APR 2025
Original Issue Date: 2020

MANUFACTURER RESPONSIBLE FOR LABEL ACCURACY
INTERNATIONAL LIVING FUTURE INSTITUTE™ living-future.org/declare

COMMERCIAL BRANDS

C2G | Chief | Connectrac | Da-Lite | Luxul | Middle Atlantic | Vaddio | Wiremold

AMAZING AV EXPERIENCES | legrandav.com

USA 866.977.3901 av.support@legrand.com CANADA 877.345.4329 av.support@legrand.com
EMEA +31 495 580 840 av.emea.sales@legrand.com APAC +852 2145 4099 av.asia.sales@legrand.com