

DAC-QSFP56-4SFP56-xM

200GBase QSFP56 to 4x 50GBase SFP56 Direct Attach Cable

Copper, Passive, 0.5m to 3m Lengths, Commercial Temperature

FEATURES

- Complies with SFF-8636
- Complies with Ethernet IEEE802.3bj/IEEE 802.3cd
- Supports serial ID function through EEPROM
- Supports hot swap, low crosstalk, low power consumption
- Supports the maximum distance of 3 metres
- Commercial Operating Temperature Range: 0°C to 70°C
- RoHS compliant
- Four electrical interface transmits up to 28Gbps NRZ or 56Gbps PAM4

APPLICATIONS

- 10G/40G/100G/200G Ethernet
- InfiniBand SDR, DDR, QDR, FDR, EDR, HDR
- Switches, Routers, Data Centres, Cloud Servers

DESCRIPTION

200G QSFP56 passive cable assembly products are based on 4X50G or 4X56G structures. They meet the needs of next generation 200G switches, servers, routers and other product applications. QSFP56 cables adopt an optimised design to reduce crosstalk and insertion loss with excellent signal integrity and fully comply with the next generation 200G Ethernet and InfiniBand HDR standards.

SFP56 is based on the SFP28 form factor and supports NRZ and PAM4 transmission, providing 56Gbps error-free transmission. It can be used in high-density 56G Ethernet switches and network interfaces to promote server connections in data centres.

200G QSFP56 To 4x50G SFP56 supports the interconnection of two interface devices, with a single channel transmission rate of 56Gbps.

WIRING DIAGRAM

wire	Starting signal	Starting	End	End signal	wire	Starting signal	Starting	End	End signal
W1	RX1+	X1. 17	X2. 18	TX1+	W3	RX3+	X1. 14	X4. 18	TX3+
	RX1-	X1. 18	X2. 19	TX1-		RX3-	X1. 15	X4. 19	TX3-
	GND	X1. 19	X2. 20	GND		GND	X1. 16	X4. 20	GND
	TX1+	X1. 36	X2. 13	RX1+		TX3+	X1. 33	X4. 13	RX3+
	TX1-	X1. 37	X2. 12	RX1-		TX3-	X1. 34	X4. 12	RX3-
	GND	X1. 38	X2. 14	GND		GND	X1. 35	X4. 14	GND
W2	GND	X1. 20	X3. 20	GND	W4	GND	X1. 23	X5. 20	GND
	RX2-	X1. 21	X3. 19	TX2-		RX4-	X1. 24	X5. 19	TX4-
	RX2+	X1. 22	X3. 18	TX2+		RX4+	X1. 25	X5. 18	TX4+
	GND	X1. 1	X3. 14	GND		GND	X1. 4	X5. 14	GND
	TX2-	X1. 2	X3. 12	RX2-		TX4-	X1. 5	X5. 12	RX4-
	TX2+	X1. 3	X3. 13	RX2+		TX4+	X1. 6	X5. 13	RX4+

ELECTRICAL CHARACTERISTICS

ITEM		REQUIREMENT							TEST CONDITION
Differential Impedance	Cable Impedance	105+5/-10Ω							Rise time of 25ps (20% - 80%).
	Paddle Card Impedance	100±10Ω							
	Cable Termination Impedance	100±15Ω							
Differential (Input/Output) Return loss S_{DD11}/S_{DD22}		Return_loss(f)≥ $\begin{matrix} 16.5-2\sqrt{f} & 0.05\leq f < 4.1 \\ 10.66-14\log_{10}(f/5.5) & 4.1\leq f\leq 19 \end{matrix}$ Where f is the frequency in GHz Return loss (f) is the return loss at frequency f							10MHz≤f≤19GHz
Differential to common-mode (Input/Output) Return loss S_{CD11}/S_{CD22}		Return_loss(f)≥ $\begin{matrix} 22-(20/25.78)f & 0.01\leq f < 12.89 \\ 15-(6/25.78)f & 12.89\leq f\leq 19 \end{matrix}$ Where f is the frequency in GHz Return_loss (f) is the Differential to common-mode return loss at frequency f							10MHz≤f≤19GHz
Common-mode to Common-mode (Input/Output) Return loss S_{CC11}/S_{CC22}		$Return_loss(f)\geq 2\text{dB}$ $0.2\leq f\leq 19$ Where f is the frequency in GHz Return_loss(f) is the common-mode to common-mode return loss at frequency f							10MHz≤f≤19GHz
Differential Insertion Loss (S_{DD21} Max.)		(Differential InsertionLoss Max. For TPa to TPb Excluding Test Fixture)							10MHz≤f≤19GHz
		F AWG	1.25GHz	2.5GHz	5.0GHz	7.0GHz	10Ghz	12.89Ghz	
		30(1m) Max.	4.5dB	5.4dB	6.3dB	7.5dB	8.5dB	10.5dB	
		30/28(3m) Max.	7.5dB	9.5dB	12.2dB	14.8dB	18.0dB	21.5dB	
		26(3m) Max.	5.7dB	7.2dB	9.9dB	11.9dB	14.1dB	16.5dB	
		26/25(5m) Max.	7.8dB	10.0dB	13.5dB	16.0dB	19.0dB	22.0dB	

CONTINUED

Differential to common-mode Conversion Loss-Differential Insertion Loss ($S_{CD21}-S_{DD21}$)	$\text{Conversion_loss}(f) - IL(f) \geq \left\{ \begin{array}{ll} 10 & 0.01 \leq f < 12.89 \\ 27-(29/22)f & 12.89 \leq f < 15.7 \\ 6.3 & 15.7 \leq f \leq 19 \end{array} \right\}$ Where f is the frequency in GHz Conversion_loss(f) is the cable assembly differential to common-mode conversion loss IL(f) is the cable assembly insertion loss	$10\text{MHz} \leq f \leq 19\text{GHz}$
MDNEXT (multiple disturber near-end crosstalk)	$\geq 26\text{dB @} 12.89\text{GHz}$	$10\text{MHz} \leq f \leq 19\text{GHz}$
Low Level Contact Resistance	70milliohms Max. From initial.	EIA-364-23: Apply a maximum voltage of 20mV and a current of 100 mA.
Insulation Resistance	10Mohm (Min.)	EIA364-21: AC 300V 1 minute
Dielectric Withstanding Voltage	NO disruptive discharge.	EIA-364-20: Apply a voltage of 300 VDC for 1 minute between adjacent terminals and between adjacent terminals and ground.


ENVIRONMENTAL CHARACTERISTICS

ITEM	REQUIREMENT	TEST CONDITON
Operating Temperature Range	-20°C to +75°C	Cable operating temperature range.
Storage Temperature Range (in packed condition)	-40°C to +80°C	Cable storage temperature range in packed condition.
Thermal Cycling Non-Powered	No evidence of physical damage	EIA-364-32D, Method A, -25 to 90C, 100 cycles, 15 min. dwells
Salt Spraying	48 hours salt spraying after shell corrosive area less than 5%.	EIA-364-26
Mixed Flowing Gas	Pass electrical tests per 3.1 after stressing. (For connector only)	EIA-364-35 Class II, 14 days.
Temperature Life	No evidence of physical damage	EIA-364-17C w/ RH, Damp heat 90°C at 85% RH for 500 hours then return to ambient
Cable Cold Bend	4H, No evidence of physical damage	Condition: -20°C±2°C, mandrel diameter is 6 times the cable diameter.

MECHANICAL & PHYSICAL CHARACTERISTICS

ITEM	REQUIREMENT	TEST CONDITON
Vibration	Pass electrical tests per 3.1 after stressing.	Clamp & vibrate per EIA-364-28E, TC-VII, test condition letter – D, 15 minutes in X, Y & Z axis.
Cable Flex	No evidence of physical damage	Flex cable 180° for 20 cycles ($\pm 90^\circ$ from nominal position) at 12 cycles per minute with a 1.0kg load applied to the cable jacket. Flex in the boot area 90° in each direction from vertical. Per EIA-364-41C
Cable Plug Retention in Cage	90N Min. No evidence of physical damage	Force to be applied axially with no damage to cage. Per SFF 8661 Rev 2.1. Pull on cable jacket approximately 1ft behind cable plug. No functional damage to cable plug below 90N. Per SFF-8432 Rev 5.0
Cable Retention in Plug	90N Min. No evidence of physical damage	Cable plug is fixtured with the bulk cable hanging vertically. A 90N axial load is applied (gradually) to the cable jacket and held for 1 minute. Per EIA-364-38B
Mechanical Shock	Pass electrical tests Per 3.1 after stressing.	Clamp and shock per EIA-364-27B, TC-G,3 times in 6 directions, 100g, 6ms.
Cable Plug Insertion	40N Max. (QSFP56) 18N Max. (SFP56)	Per SFF8661 Rev 2.1 Per SFF-8432 Rev 5.0
Cable plug Extraction	30N Max. (QSFP56) 12.5N Max. (SFP56)	Place axial load on de-latch to de-latch plug. Per SFF8661 Rev 2.1 Measure without the aid of any cage kick-out springs. Place axial load on de-latch to de-latch plug. Per SFF-8432 Rev 5.0
Durability	50 cycles, No evidence of physical damage	EIA-364-09, perform plug & unplug cycles: Plug and receptacle mate rate: 250 times/hour. 50 times for QSFP28/SFP28 module (CONNECTOR TO PCB)

MECHANICAL DIMENSIONS (UNITS: mm)

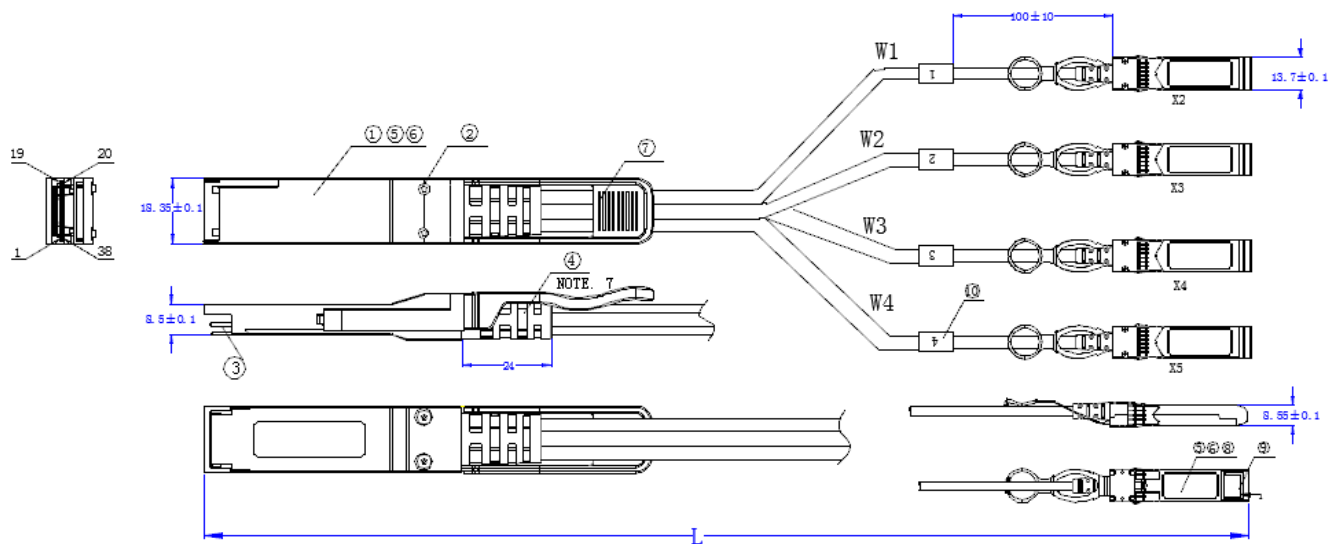

26AWG QSFP56:

