


Overview

HP ProDesk 2 Tower G1i E Desktop PC

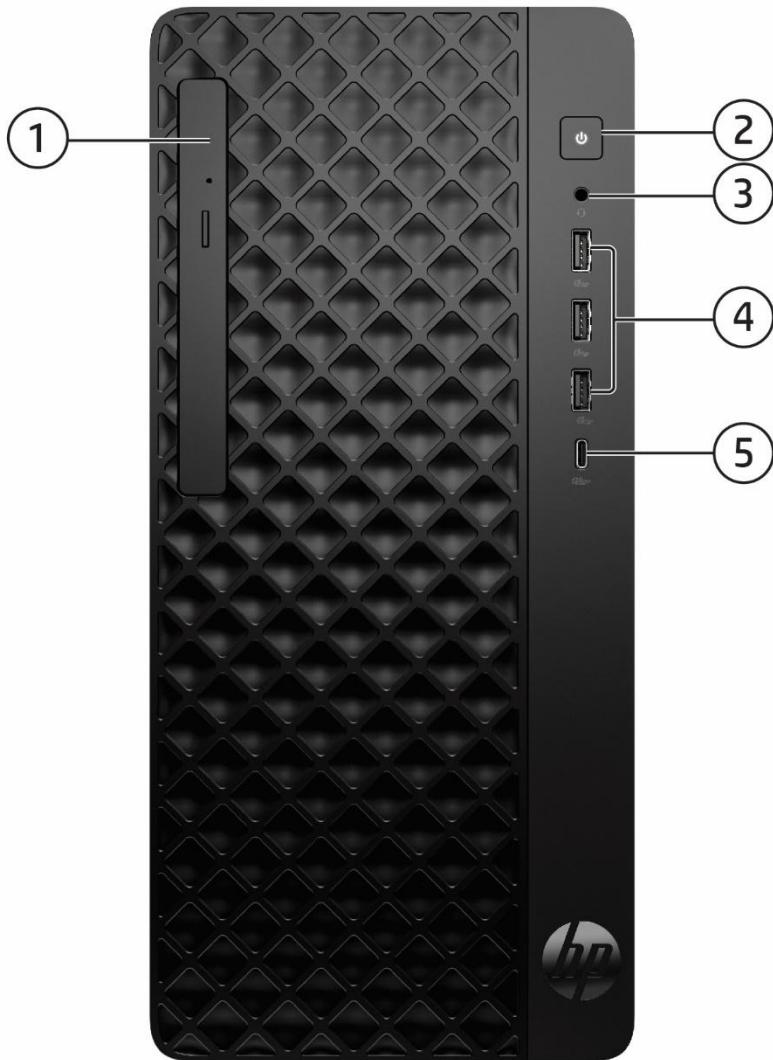

1. Slim-height Bay - supporting an optical disk drive (Optional)
2. Power Button
3. Combo jack, Headphone/ Microphone
4. (3) SuperSpeed USB 5Gbps signaling rate port¹
5. (1) USB-C 3.2 G2 (10G)²

Not shown

- (1) PCI Express 4.0 x16
- (1) PCI Express 3.0 x1
- (1) M.2 for WLAN
- (1) M.2 2280 storage


Bays

- (1) 3.5"
- (1) 9.5mm internal optical drive bay

1. SuperSpeed USB 5Gbps = USB 3.2 Gen1
2. SuperSpeed USB 10Gbps = USB 3.2 Gen2.

Overview

HP ProDesk 2 Tower G1i E Desktop PC

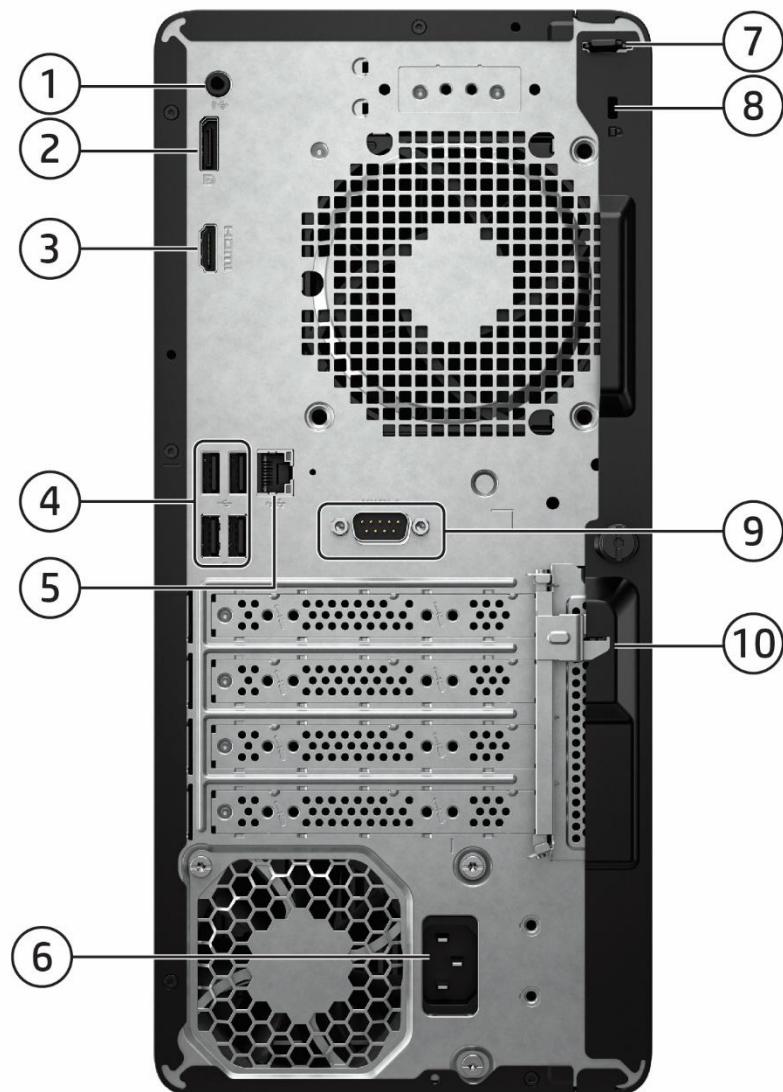

1. Audio Line-out- retask as Line-in	6. Power cord connector
2. DisplayPort 1.4a	7. Padlock loop
3. HDMI 1.4b	8. Security cable lock slot
4. Connector (4) USB 2.0 port	9. Serial port (optional)
5. RJ-45 Network	10. Integrated accessories cable lock

Not shown

- (1) PS/2 Port (Optional)
- (1) Parallel Port (Optional via PClex1 slot)
- (1) 4 Serial Port (Optional via PClex1 slot)²
- (1) Buzzer

Overview

AT A GLANCE

- Windows 11 Pro 64, Win 11 Home 64, Windows 11 Home Single Language, or FreeDOS.
- Intel® H770¹ chipset supporting Intel® 13th or 14th processors¹ featuring Intel® UHD Graphics.
- Supports an optional discrete graphics card.
- Integrated 10/100/1000 Ethernet Controller or Realtek RTL8852BE-VT 802.11ax 2x2 Wi-Fi 6 + Bluetooth 5.4 Wireless Card (802.11ax 2x2, supporting gigabit data rate), or Realtek RTL8852CE 802.11ax 2x2 Wi-Fi 6E + Bluetooth 5.3 Wireless Card (802.11ax 2x2, supporting gigabit data rate).
- Up to 64GB DDR5-5600 Unbuffered Memory (UDIMM).
- Independent monitor support via DP and HDMI interfaces.
- TPM2.0 support (fTPM)¹.
- Supports both Hard Disk Drives and PCIe® NVMe™ M.2 SSD or PCIe® NVMe™ TLC M.2 SSD.
- Up to 8 USB Ports (including native 3 SuperSpeed USB 5Gbps signaling rate ports and 1 USB Type-C® 10Gbps, and 4 USB 2.0 ports).
- 180W 90% HE power supply and 280W/ 400W/ 92% HE power supply.
- Security cable lock supported (sold separately).
- Optional HP Services available²; terms and conditions vary by country; certain restrictions and exclusions apply.

1. HP Services are optional. Service levels and response times for HP Care Services may vary depending on your geographic location. Service starts on date of hardware purchase. Restrictions and limitations apply. For details, visit <http://www.hp.com/go/cpc>. HP services are governed by the applicable HP terms and conditions of service provided or indicated to customer at the time of purchase. Customer may have additional statutory rights according to applicable local laws, and such rights are not in any way affected by the HP terms and conditions of service or the HP Limited Warranty provided with your HP Product.

NOTE: See important legal disclosures for all listed specs in their respective features sections.

PRODUCT NAME

HP ProDesk 2 Tower G1i E Desktop PC

OPERATING SYSTEM

Preinstalled	Windows 11 Pro ¹
	Windows 11 Home - HP recommends Windows 11 Pro for Business ¹
	Windows 11 Home Single Language - HP recommends Windows 11 Pro for Business ¹
	FreeDOS

1. Not all features are available in all editions or versions of Windows. Systems may require upgraded and/or separately purchased hardware, drivers, software or BIOS update to take full advantage of Windows functionality. Windows is automatically updated and enabled. High speed internet and Microsoft account required. ISP fees may apply and additional requirements may apply over time for updates. See <http://www.windows.com>.

Standard Features and Configurable Modules

PROCESSORS

Intel 13th Processors

Intel® Core™ i3¹

CPU Intel Core i3-13100 4C 3.4GHz 3200MHz 60W (3.4GHz, turbo up to 4.5GHz, 12MB cache, 4 cores).

Intel® Core™ i5¹

CPU Intel Core i5-13400 10C 2.5GHz 3200MHz 65W (2.5GHz, turbo up to 4.6GHz, 20MB cache, 10 cores).

CPU Intel Core i5-13500 14C 2.5GHz 3200MHz 65W (2.5GHz, turbo up to 4.8GHz, 24MB cache, 14 cores).

Intel® Core™ i7¹

CPU Intel Core i7-13700 16C 2.1GHz 3200MHz 65W (2.1GHz, Up to 5.2GHz with Intel® Turbo Boost², 30MB cache, 16 cores).

Intel 14th Processors

Intel® Core™ 300 with Intel UHD Graphics 710 (3.9 GHz P-core base frequency, 6 MB L3 cache, 2 P-cores, 4 threads).

Intel® Core™ i3¹

Intel® Core™ i3-14100 with Intel UHD Graphics 730 (3.5 GHz P-core base frequency, up to 4.7 GHz P-core Max Turbo frequency, 12 MB L3 cache, 4 P-cores, 8 threads).

Intel® Core™ i5¹

Intel® Core™ i5-14400 with Intel UHD Graphics 730 (1.8 GHz E-core base frequency, 2.5 GHz P-core base frequency, up to 3.5 GHz E-core Max Turbo frequency, up to 4.7 GHz P-core Max Turbo frequency, 20 MB L3 cache, 6 P-cores and 4 E-cores, 16 threads).

Intel® Core™ i5-14500 with Intel UHD Graphics 770 (1.9 GHz E-core base frequency, 2.6 GHz P-core base frequency, up to 3.7 GHz E-core Max Turbo frequency, up to 5.0 GHz P-core Max Turbo frequency, 24 MB L3 cache, 6 P-cores and 8 E-cores, 20 threads), supports Intel® vPro® Technology.

Intel® Core™ i7¹

Intel® Core™ i7-14700 with Intel UHD Graphics 770 (1.5 GHz E-core base frequency, 2.1 GHz P-core base frequency, up to 4.2 GHz E-core Max Turbo frequency, up to 5.3 GHz P-core Max Turbo frequency, 33 MB L3 cache, 8 P-cores and 12 E-cores, 28 threads), supports Intel® vPro® Technology.

1. Multi-Core is designed to improve performance of certain software products. Not all customers or software applications will necessarily benefit from use of this technology. 64-bit computing system required. Performance and clock frequency will vary depending on application workload and your hardware and software configurations. Intel's numbering, branding and/or naming is not a measurement of higher performance.

Standard Features and Configurable Modules

CHIPSET

Intel® H770 Chipset

GRAPHICS

Integrated^{1,2}

Intel® UHD
Graphics 770
Graphics 730
Graphics 710

Discrete Graphics

Intel Arc A380 graphic (6GB GDDR6)
AMD Radeon™ RX 6300 Graphics (2GB GDDR6)
NVIDIA GeForce RTX 5060 8 GB GDDR7 FH PCIe x16 Graphics

1. HD content required to view HD images.

2. Integrated Intel software is available on select models only and requires separately purchased projector, tv or computer monitor with an integrated or external receiver. External receivers connect to the projector, tv or computer monitor via a standard VGA, HDMI cable, also sold separately.

*NOTE: Available in select countries only.

Standard Features and Configurable Modules

MEMORY

Form Factor	Type	Maximum	# of Slots
Tower	DDR5 5600/4800	64 GB capacity	2 DIMM ¹
8GB DDR5-5600 UDIMM (1x8GB)			
8GB DDR5-4800 UDIMM (1x8GB) ²			
16GB DDR5-5600 UDIMM (1x16GB)			
16GB DDR5-4800 UDIMM (1x16GB)			
16GB DDR5-5600 UDIMM (2x8GB) ²			
16GB DDR5-4800 UDIMM (2x8GB) ²			
32GB DDR5-5600 UDIMM (1x32GB)			
32GB DDR5-4800 UDIMM (1x32GB)			
32GB DDR5-5600 UDIMM (2x16GB) ²			
32GB DDR5-4800 UDIMM (2x16GB) ²			
64GB DDR5-5600 UDIMM (2x32GB) ²			
64GB DDR5-4800 UDIMM (2x32GB) ²			

1. Memory modules supporting data transfer rates up to 5600/MTs requires Intel® Core™ i5-1x600 or i7 CPUs, with other CPUs, memory supports data transfer rates up to 4800 MT/s. When select the WLAN card, the memory modules support data transfer rates up to 4400/MTs.

2. Memory speed 5200 MT/s can be achieved when dual-rank (2R) memory UDIMMs when populated with the same part number.

Standard Features and Configurable Modules

STORAGE

NOTE: Starting from November 1st, 2023, all shipments will require Windows to be installed when selecting a SSD. HDD can only be configured as additional data drives and not as the boot drive.

SATA3 - 3.5" or 2.5" 6Gb/s HDDs

2TB 7200 RPM SATA Hard Disk Drive

1TB 7200 RPM SATA Hard Disk Drive

NOTE: For hard drives and solid state drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36GB (for Windows) of system disk is reserved for the system recovery software.

Solid State Drives

256GB M.2 2280 PCIe NVMe SSD

512GB M.2 2280 PCIe NVMe SSD

1TB M.2 2280 PCIe NVMe SSD

2TB M.2 2280 PCIe NVMe SSD

256GB M.2 2280 PCIe NVMe Three Layer Cell SSD¹

512GB M.2 2280 PCIe NVMe Three Layer Cell SSD

1TB M.2 2280 PCIe NVMe Three Layer Cell SSD

2TB M.2 2280 PCIe NVMe Three Layer Cell SSD

NOTE: For hard drives and solid state drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36GB (for Windows) of system disk is reserved for the system recovery software.

***NOTE:** Available in select countries only.

OPTICAL DISC DRIVES

DVD-ROM 9.5mm

DVD-Writer¹ 9.5mm

1. HD-DVD disks cannot be played on this drive. No support for DVD-RAM. Actual speeds may vary. Don't copy copyright-protected materials. Double Layer discs can store more data than single layer discs. Discs burned with this drive may not be compatible with many existing single-layer DVD drives and players.

Standard Features and Configurable Modules

NETWORKING¹

Ethernet (RJ-45)

Integrated 10/100/1000M GbE LAN

Network Adapter Intel FoxPond2 I226-T1 2.5GbE

Wi-Fi® and Bluetooth®

Realtek RTL8852BE-VT 802.11ax 2x2 Wi-Fi 6 + Bluetooth 5.4 Wireless Card (802.11ax 2x2, supporting gigabit data rate)

Realtek RTL8852CE 802.11ax 2x2 Wi-Fi 6E + Bluetooth 5.3 Wireless Card (802.11ax 2x2, supporting gigabit data rate)

¹. Wireless access point and internet service required and sold separately. Availability of public wireless access points limited. Wi-Fi 5 (802.11 ac) is backwards compatible with prior 802.11 specs.

NOTE: Wireless cards are optional or add-on features and requires separately purchased wireless access point and internet service. Availability of public wireless access points limited.

AUDIO / MULTIMEDIA

Realtek ALC3602-CG codec

Integrated Hi-Definition Audio

Combo Jack, Headphone / Microphone

Audio Line-out- retask as Line-in

KEYBOARDS AND POINTING DEVICES¹

Keyboard

HP 125 v2 AntiMic Wired Keyboard (China only)

HP 320K v2 Keyboard

HP Bus Slim v2 Smart Card Wired Keyboard

HP 655 v2 Black Wireless Keyboard/Mouse Kit

Mouse

HP Wired 320M Mouse

HP Wired 125 AntiM Mouse (China only)

HP Black 125 Wired Mouse

HP Wired 128 LSR Mouse

HP USB Hardened Optical Wired Mouse

¹. Keyboards and mouse are optional or add-on features. A keyboard and mouse are required for this device. If you do not already have a keyboard and mouse, please refer to a list of compatible keyboards on the “Recommended Accessories” page.

Standard Features and Configurable Modules

PORTS

Front

- Slim-height Bay - supporting an optical disk drive (Option)
- Power Button
- Combo jack, Headphone / Microphone
- (3) SuperSpeed USB 5Gbps signaling rate port
- (1) USB-C® 10Gbps

Not shown

- (1) PCI Express 4.0 x16
- (1) PCI Express 3.0 x1
- (1) M.2 for WLAN
- (1) M.2 2280 storage

Rear

- Audio Line-out- retask as Line-in
- HDMI Port 1.4b
- DisplayPort 1.4a
- Serial Port (Option)
- Slim Cable Lock
- (4) USB 2.0 port
- RJ-45 Network connector
- Power cord connector
- Padlock loop
- Integrated accessories cable lock

Not shown

- (1) PS/2 Port (Option)
- (1) Parallel Port (Option via PClex1 slot)
- (1) 4x Serial port (Option via PClex1 slot)*
- (1) Buzzer

NOTE*: SuperSpeed USB 10Gbps = USB 3.2 Gen2. SuperSpeed USB 5Gbps = USB 3.2 Gen1

BAYS

- (1) 9.5mm external slimline ODD bay (Option)
- (1) 3.5" internal HDD with Bay (Optional)

Standard Features and Configurable Modules

SOFTWARE COMPONENTS AND APPLICATIONS WITH WINDOWS

Security and Protection

McAfee – MLS¹

HP Utilities and Support

HP Documentation

HP Support Assistant

BTB

HP Setup Integrated OOB (GDPR)

Hardware Enabling Drivers or software utility

HP System Event Utility

BIOS

Administrator Password

Self recovery

Hard drive utilities

HP Secure erase feature

Secure Boot

Cover Removal Sensor

UEFI Self Certification Level: 2.9

1. Free 1-year subscription of McAfee LiveSafe service included. Internet access required and not included. Subscription required after expiration
2. Sold separately and requires Internet access for activation.
3. Simply sign up and start using Xerox® DocuShare® Go. No credit card. No obligation. Data will become unavailable unless a subscription is entered before the end of the 90 day free trial period. See visit <https://http://www.xerox.com/docusharego> for details.
4. Internet access required and not included.
5. Easily switch between speaker and microphone sources with intuitive controls and a consistent app experience.

***NOTE:** Available in Latin America countries only.

POWER SUPPLY¹

180 W

EPA90 Power Supply

280W

EPA92 Power Supply

400 W

EPA92 Power Supply

1. All power supplies are not available in every region.

Standard Features and Configurable Modules

DIMENSIONS AND WEIGHT

Dimensions

6.10 x 12.13 x 13.27 in
(155 x 308 x 337mm)

Weight

14.88 lbs / 6.75 kg

UNIT ENVIRONMENT AND OPERATING CONDITIONS

General Unit Operating Guidelines

- Keep the computer away from excessive moisture, direct moisture and the extremes of heat and cold, to ensure that unit is operated within the specified operating range.
- Leave a 10.2 cm (4 in) clearance on all vented sides of the computer to permit the required airflow.
- Never restrict airflow into the computer by blocking any vents or air intakes.
- Do not stack computers on top of each other or place computers so near each other that they are subject to each other's re-circulated or preheated air.
- Occasionally clean the air vents on the front, back, and any other vented side of the computer. Lint, dust and other foreign matter can block the vents and limit the airflow.
- If the computer is to be operated within a separate enclosure, intake and exhaust ventilation must be provided on the enclosure, and the same operating guidelines listed above will still apply.

Temperature Range

Operating: 5° to 35° C¹

Non-operating: -30° to 60° C¹

Relative Humidity

Operating: 15% to 80% (non-condensing at ambient)

Non-operating: 15% to 80% (non-condensing at ambient)

Maximum Altitude (unpressurized)

Operating: 5000 m

Non-operating: 50000ft (15240 m)

1. Operating temperature is de-rated 1.0 deg C per 300 m (1000 ft) to 3000 m (10,000 ft) above sea level, no direct sustained sunlight. Maximum rate of change is 10 deg C/Hr. The upper limit may be limited by the type and number of options installed.

Eco-Label Certifications & declarations	<p>This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:</p> <ul style="list-style-type: none">IT ECO declarationTUV ultra-low noiseUS ENERGY STAR®EPEAT Gold* or EPEAT Silver** registered in the United States. See http://www.epeat.net for registration status in your country.TCO CertifiedChina Energy Conservation Program (CECP)Clean Energy Certificates (CEL)Minimum Energy Performance Standard (Korea/Vietnam/A/Z MEPS)Ukraine energyCommission Regulation (EC) No 617/2013 (ErP Lot 3)
--	--

Standard Features and Configurable Modules

Sustainable Impact Specifications	<ul style="list-style-type: none"> • Product Carbon Footprint (hp.com) • 46.10% post-consumer recycled plastic • Low halogen • Outside Box and corrugated cushions are 100% sustainably sourced and recyclable • Molded Paper Pulp Cushion inside box is 100% sustainably sourced and recyclable • Bulk packaging available 		
System Configuration	The configuration used for the Energy Consumption and Declared Noise Emissions data for the Desktop model is based on a "Typically Configured Desktop".		
Energy Consumption (in accordance with US ENERGY STAR® test method)	115VAC, 60Hz	230VAC, 50Hz	100VAC, 50Hz
Normal Operation (Short idle)	13.97 W	14.20 W	14.80 W
Normal Operation (Long idle)	N/A	N/A	N/A
Sleep	4.09 W	3.58 W	4.10 W
Off	0.65 W	0.64 W	0.64 W
	<p>NOTE: Energy efficiency data listed is for an ENERGY STAR® compliant product if offered within the model family. HP computers marked with the ENERGY STAR® Logo are compliant with the applicable U.S. Environmental Protection Agency (EPA) ENERGY STAR® specifications for computers. If a model family does not offer ENERGY STAR® compliant configurations, then energy efficiency data listed is for a typically configured PC featuring a hard disk drive, a high efficiency power supply, and a Microsoft Windows® operating system.</p>		
Heat Dissipation*	115VAC, 60Hz	230VAC, 50Hz	100VAC, 50Hz
Normal Operation (Short idle)	48 BTU/hr	49 BTU/hr	51 BTU/hr
Normal Operation (Long idle)	N/A	N/A	N/A
Sleep	14 BTU/hr	12 BTU/hr	14 BTU/hr
Off	2 BTU/hr	2 BTU/hr	2 BTU/hr
	<p>NOTE: Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.</p>		
Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296)	Sound Power (L_{WAd}, bels)		Sound Pressure (L_{pAm}, decibels)
Typically Configured – Idle	3.2		25
Fixed Disk – Random writes	3.5		26
Optical Drive – Sequential reads	3.3		25
Longevity and Upgrading	<p>This product can be upgraded, possibly extending its useful life by several years. Upgradeable features and/or components contained in the product may include:</p> <p>Spare parts are available throughout the warranty period and or for up to "5" years after the end of production.</p>		

Standard Features and Configurable Modules

Batteries	<p>This battery(s) in this product comply with EU Directive 2006/66/EC</p> <p>Batteries used in the product do not contain:</p> <ul style="list-style-type: none"> Mercury greater than 1ppm by weight Cadmium greater than 20ppm by weight <p>Battery size: CR2032 (coin cell)</p> <p>Battery type: Lithium</p>												
Additional Information	<ul style="list-style-type: none"> This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive - 2011/65/EC. This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive – 2002/96/EC. This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986). This product is in compliance with the IEEE 1680.1 (EPEAT) standard at the Gold level, see http://www.epeat.net. Plastics parts weighing over 25 grams used in the product are marked per ISO11469 and ISO1043. This product contains 28.2% post-consumer recycled plastic (by wt.) This product is 92.9% recycle-able when properly disposed of at end of life. 												
Packaging Materials	<table border="1" data-bbox="376 910 1511 1056"> <tr> <td>External:</td> <td>PAPER/Corrugated</td> <td>1048 g</td> </tr> <tr> <td></td> <td>PAPER/Paperboard</td> <td>108 g</td> </tr> <tr> <td></td> <td>PAPER/Molded Pulp</td> <td>676 g</td> </tr> <tr> <td></td> <td>OTHER/other</td> <td>58 g</td> </tr> </table> <p>The plastic packaging material contains at least 0.0% recycled content.</p> <p>The corrugated paper packaging materials contains at least 35.0% recycled content.</p>	External:	PAPER/Corrugated	1048 g		PAPER/Paperboard	108 g		PAPER/Molded Pulp	676 g		OTHER/other	58 g
External:	PAPER/Corrugated	1048 g											
	PAPER/Paperboard	108 g											
	PAPER/Molded Pulp	676 g											
	OTHER/other	58 g											
RoHS Compliance	<p>HP Inc. complies fully with materials regulations. We were among the first companies to extend the restrictions in the European Union (EU) Restriction of Hazardous Substances (RoHS) Directive to our products worldwide through the HP GSE. HP has contributed to the development of related legislation in Europe, as well as China, India, and Vietnam.</p> <p>We believe the RoHS directive and similar laws play an important role in promoting industry-wide elimination of substances of concern. We have supported the inclusion of additional substances—including PVC, BFRs, and certain phthalates—in future RoHS legislation that pertains to electrical and electronics products.</p> <p>We met our voluntary objective to achieve worldwide compliance with the new EU RoHS requirements for virtually all relevant products by July 2013, and we will continue to extend the scope of the commitment to include further restricted substances as regulations continue to evolve.</p> <p>To obtain a copy of the HP RoHS Compliance Statement, see HP RoHS position statement.</p>												
Material Usage	<p>This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for the Environment at http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/gse.pdf):</p> <ul style="list-style-type: none"> Asbestos Certain Azo Colorants Certain Brominated Flame Retardants – may not be used as flame retardants in plastics Cadmium Chlorinated Hydrocarbons Chlorinated Paraffins Formaldehyde Halogenated Diphenyl Methanes Lead carbonates and sulfates Lead and Lead compounds 												

Standard Features and Configurable Modules

	<ul style="list-style-type: none">• Mercuric Oxide Batteries• Nickel – finishes must not be used on the external surface designed to be frequently handled or carried by the user.• Ozone Depleting Substances• Polybrominated Biphenyls (PBBs)• Polybrominated Biphenyl Ethers (PBBEs)• Polybrominated Biphenyl Oxides (PBBOs)• Polychlorinated Biphenyl (PCB)• Polychlorinated Terphenyls (PCT)
	<ul style="list-style-type: none">• Polyvinyl Chloride (PVC) – except for wires and cables, and certain retail packaging has been voluntarily removed from most applications.• Radioactive Substances• Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)
Packaging Usage	<p>HP follows these guidelines to decrease the environmental impact of product packaging:</p> <ul style="list-style-type: none">• Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.• Eliminate the use of ozone-depleting substances (ODS) in packaging materials.• Design packaging materials for ease of disassembly.• Maximize the use of post-consumer recycled content materials in packaging materials.• Use readily recyclable packaging materials such as paper and corrugated materials.• Reduce size and weight of packages to improve transportation fuel efficiency.• Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.
End-of-life Management and Recycling	<p>HP Inc. offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: http://www.hp.com/go/reuse-recycle or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.</p> <p>The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: http://www.hp.com/go/recyclers. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.</p> <p>Global Citizenship Report http://www.hp.com/hpinfo/globalcitizenship/greport/index.html</p> <p>Eco-label certifications http://www8.hp.com/us/en/hp-information/environment/ecolabels.html</p> <p>ISO 14001 certificates http://h20195.www2.hp.com/V2/GetDocument.aspx?docname=c04755842</p> <p>and http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/cert.pdf</p>

Standard Features and Configurable Modules

SERVICE AND SUPPORT

On-site Warranty¹: Available three-year (3-3-3) or one-year (1-1-1) limited warranty (varies by country) delivers on-site, next business day² service for parts and labor and complimentary limited technical support³. Three-year onsite and labor are not available in all countries. Service offers terms up to 3 years by choosing an optional HP Care Pack⁴. To choose the right level of service for your HP product, visit HP Care Pack Central: <http://www.hp.com/go/cpc>.

1: Terms and conditions may vary by country. Certain restrictions and exclusions apply. Other warranty variations may be offered in your region.

2: On-site service may be provided pursuant to a service contract between HP and an authorized HP third-party provider, and is not available in certain countries. Global service response times are based on commercially reasonable best effort and may vary by country.

3: Technical support applies only to HP-configured and third-party HP qualified hardware and software.

4: Service levels and response times for HP Care Packs may vary depending on your geographic location. Service starts on date of hardware purchase. Restrictions and limitations apply. For details, visit <http://www.hp.com/go/cpc>. HP services are governed by the applicable HP terms and conditions of service provided or indicated to Customer at the time of purchase. Customer may have additional statutory rights according to applicable local laws, and such rights are not in any way affected by the HP terms and conditions of service or the HP Limited Warranty provided with your HP Product.

Technical Specifications - Graphics

GRAPHICS

Intel® UHD Graphics (integrated)	
Graphics Controller	Integrated
DisplayPort™	Multimode capable; supports HDCP, Display Port Audio, HBR2 link rates and Multi-Stream Technology for a maximum of 2 displays connected to any output controlled by Intel® Graphics.
HDMI (on board/optional)	Supports HDMI 1.4 features Supports HDCP 2.3 Supports audio over HDMI
Memory	The actual amount of maximum graphics memory can be >4GB. System memory is allocated for graphics as needed using Intel's Dynamic Video Memory Technology (DVMT), to provide an optimal balance between graphics and system memory use.
Maximum Color Depth	up to 16 bits/color
Graphics/Video API Support	HEVC 10b Enc/12b Dec HW VP9 10b Dec HW HDR Rec. 2020 DX12
Max. Resolution (HDMI)	4K x 2K@30Hz
Max. Resolution (DP)	4K x 2K@30Hz

Note: The actual amount of maximum graphics memory can be less than the amounts listed above depending upon your computer's configuration.

Note: other resolutions may be available but are not recommended as they may not have been tested and qualified by HP
Only supported on displays connected to the external DisplayPort™ connector.

AMD Radeon™ RX 6300 2GB GDDR6 Graphics card

Engine Clock	Base: 1512 Mhz Boost: 2040 Mhz
Memory Size / Width	2GB / 32bits
Graphic Memory Type / Clock	512Mx 32 GDDR6, 1 pcs / 16Gbs
Max. Resolution (HDMI)	7680x4320@60Hz
Max. Resolution (DP)	7680x4320@120Hz
Multi Display Support	2 displays
HDCP Compliance	Yes
Rear I/O connectors (bracket)	HDMIx1+DPx1 (LP)
Cooling (active/pассив)	Active
Total power consumption (W)	57W
Form-factor	X:160.2mm/Y:68.9mm/Z: 22.6mm PCB with single slot

Technical Specifications - Graphics

Intel® Arc™ A380 6GB GDDR6 Graphics card

Engine Clock	2150MHz
Frame Buffer Size / Width	6GB/96bit
Graphic Memory Type / Clock	GDDR6 ,3 pcs/15.5Gbps
Max. Resolution (HDMI)	4096x2160 @ 60Hz
Max. Resolution (DP)	7680x4320 @60Hz
Multi Display Support	4 displays
HDCP Compliance	Yes
Rear I/O connectors (bracket)	DP x3 + HDMI x1
Cooling (active/passive)	Active
Total power consumption (W)	75W

NVIDIA GeForce RTX 5060 8 GB GDDR7 FH PCIe x16 Graphics

Engine Clock	Base: 2280 MHz Boost: 2497 MHz
Frame Buffer Size / Width	8GB / 128bit
Graphic Memory Type / Clock	512Mx 32 GDDR7 @ 4pcs / 28Gps
Max. Resolution (HDMI)	4096x2160 x 36bpp@120Hz or 7680x4320 36bpp DSC @60Hz
Max. Resolution (DP)	3840x2160 x 30bpp @120Hz or 7680x4320 36bpp @60Hz
Multi Display Support	Up to 4 display
HDCP Compliance	Yes
Rear I/O connectors (bracket)	HDMIx1+ DPx3
Cooling (active/passive)	Active fansink with 4 pin fan control
Total power consumption (W)	145 W
Card dimension	ATX: (X:188mm/Y:111.15mm/Z: 38.0mm)

NOTE: 8 pins connector requires for RTX5060 with 400W PSU or 500W PSU

Technical Specifications – Optical Drives

STORAGE*

NOTE: Starting from November 1st, 2023, all shipments will require Windows to be installed when selecting a SSD. HDD can only be configured as additional data drives and not as the boot drive.

HP 1TB 7.2K rpm SATA 6.0Gb/s 3.5" Hard Disk Drive

Capacity	1TB
Rotational Speed	7,200 rpm
Interface	Serial ATA 3.0 (6.0 Gb/s)
Buffer Size	64MB
Logical Blocks	1,953,525,168
Seek Time	Single Track: 2.0 ms Average: 11 ms Full-Stroke: 21 ms
Height	1 in/2.54 cm
Width	Media diameter: 3.5 in/8.89 cm Physical size: 4 in/10.2 cm
Operating Temperature	41° to 131° F (5° to 55° C)

NOTE: For storage drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36GB (for Windows) is reserved for system recovery software.

HP 2TB 7.2K rpm SATA 6.0Gb/s 3.5" Hard Disk Drive

Capacity	2TB
Rotational Speed	7,200 rpm
Interface	SATA 6Gb/s NCQ
Buffer Size	64MB
Logical Blocks	3,907,029,168
Seek Time	Read: <8.5 ms Write: <9.5 ms
Height	1.028 in/26.11 mm
Width	4.0 in/101.6 mm
Operating Temperature	32° to 140° F (0° to 60° C)

NOTE: For storage drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36GB (for Windows) is reserved for system recovery software.

Technical Specifications – Optical Drives

256GB M.2 2280 PCIe NVMe Three Layer Cell SSD

Drive Weight	< 10g
Capacity	256GB
Height	2.38mm
Length	80mm
Width	22mm
Interface	PCIE Gen4x4
Maximum Sequential Read	Up to 2700MB/s
Maximum Sequential Write	Up to 1000MB/s
Logical Blocks	500,118,192
Operating Temperature	0° to 70°C (32° to 158°F) [ambient temp]
Features	APST; ASPM L1.2; NVME spec 1.2

NOTE: For storage drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36GB (for Windows) is reserved for system recovery software.

512GB M.2 2280 PCIe NVMe Three Layer Cell SSD

Drive Weight	< 10g
Capacity	512GB
Height	2.38mm
Length	80mm
Width	22mm
Interface	PCIE Gen4x4
Maximum Sequential Read	Up to 2900MB/s
Maximum Sequential Write	Up to 1100MB/s
Logical Blocks	1,000,215,216
Operating Temperature	0° to 70°C (32° to 158°F) [ambient temp]
Features	APST; ASPM L1.2; NVME spec 1.2

NOTE: For storage drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36GB (for Windows) is reserved for system recovery software.

1TB M.2 2280 PCIe NVMe Three Layer Cell SSD

Capacity	1TB
Interface	PCIE Gen4x4
Minimum Sequential Read	6400 MB/s ±10%
Minimum Sequential Write	5000 MB/s ±10%
Logical Blocks	2,000,409,264
Features	TRIM; L1.2; Pyrite 2.0

NOTE: For storage drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36GB (for Windows) is reserved for system recovery software.

Technical Specifications – Optical Drives

2TB M.2 2280 PCIe NVMe Three Layer Cell SSD

Capacity	2TB
Interface	PCIE Gen4x4
Minimum Sequential Read	6400 MB/s ±10%
Minimum Sequential Write	5000 MB/s ±10%
Logical Blocks	4,000,797,360
Features	TRIM; L1.2; Pyrite 2.0

NOTE: For storage drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36GB (for Windows) is reserved for system recovery software.

256GB M.2 2280 PCIe NVMe SSD

Drive Weight	< 10g
Capacity	256GB
Height	2.38mm
Length	80mm
Width	22mm
Interface	PCIE Gen4x4
Minimum Sequential Read	Up to 1600MB/s
Minimum Sequential Write	Up to 780MB/s
Logical Blocks	500,118,192
Operating Temperature	0° to 70°C (32° to 158°F) [ambient temp]
Features	APST; ASPM L1.2; NVME spec 1.2

NOTE: For storage drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36GB (for Windows) is reserved for system recovery software.

512GB M.2 2280 PCIe NVMe SSD

Drive Weight	< 10g
Capacity	512GB
Height	2.38mm
Length	80mm
Width	22mm
Interface	PCIE Gen4x4
Minimum Sequential Read	Up to 2200MB/s ±10%
Minimum Sequential Write	Up to 860MB/s
Logical Blocks	1,000,215,216
Operating Temperature	0° to 70°C (32° to 158°F) [ambient temp]
Features	APST; ASPM L1.2; NVME spec 1.2

NOTE: For storage drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36GB (for Windows) is reserved for system recovery software.

Technical Specifications – Optical Drives

1TB M.2 2280 PCIe NVMe SSD

Capacity	1TB
Interface	PCIE Gen4x4
Minimum Sequential Read	2200 MB/s ±10%
Minimum Sequential Write	1600 MB/s ±10%
Logical Blocks	2,000,409,264
Features	TRIM; L1.2

NOTE: For storage drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36GB (for Windows) is reserved for system recovery software.

2TB M.2 2280 PCIe NVMe SSD

Capacity	2TB
Interface	PCIE Gen4x4
Minimum Sequential Read	5400 MB/s ±10%
Minimum Sequential Write	4700 MB/s ±10%
Logical Blocks	4,000,797,360
Features	TRIM; L1.2

Technical Specifications – Optical Drives

OPTICAL DISC DRIVES

HP 9.5mm Slim DVD-ROM Drive

Height	9.5 mm height
Orientation	Either horizontal or vertical
Interface type	SATA/ATAPI
Dimensions (W x H x D)	5.04 x 0.37 x 5.0 in (128 x 9.5 x 127 mm) without bezel
Weight (max)	Up to 0.31 lb (140g) without bezel
Read Speeds	DVD+R/-R/+RW/ -RW/+R DL /-R DL Up to 8X DVD-ROM Up to 8X CD-ROM, CD-R Up to 24X CD-RW Up to 24X
Access time (typical reads, including settling)	Random: DVD-ROM: 170 ms (typical), CD-ROM: 170 ms (typical) Full stroke: DVD-ROM: 320 ms (typical), CD-ROM: 320 ms (typical)
Power	Source Slimline SATA DC power receptacle DC Power Requirement 5 VDC ± 5%-100 mV ripple p-p DC Current 5 VDC (< 1000 mA typical, 1600 mA maximum)
Environmental conditions (operating - non-condensing)	Temperature 41° to 122° F (5° to 50° C) Relative Humidity 10% to 80% Maximum Wet Bulb Temperature 84° F (29° C)

HP 9.5mm Slim DVD Writer Drive

Height	9.5 mm height
Orientation	Either horizontal or vertical
Interface type	SATA/ATAPI
Dimensions (W x H x D)	5.04 x 0.37 x 5.0 in (128 x 9.5 x 127 mm) without bezel
Weight (max)	Up to 0.31 lb (140 g) Without bezel
Write Speeds	DVD-R DL - Up to 6X DVD+R - Up to 8X DVD+RW - Up to 8X DVD+R DL - Up to 6X DVD-R - Up to 8X DVD-RW - Up to 6X CD-R - Up to 24X CD-RW - Up to 10X
Read Speeds	DVD-RW, DVD+RW - Up to 8X DVD-R DL, DVD+R DL - Up to 8X DVD+R, DVD-R - Up to 8X DVD-ROM DL, DVD-ROM - Up to 8X CD-ROM, CD-R - Up to 24X CD-RW - Up to 24X
Access time (typical reads, including settling)	Random DVD-ROM: 170 ms (typical), CD-ROM: 170 ms (typical) Full Stroke DVD-ROM: 320 ms (typical), CD-ROM: 320 ms (typical) Stop Time 6 seconds (typical)

Technical Specifications – Optical Drives

Power

Source Slimline SATA DC power receptacle
DC Power Requirement 5 VDC \pm 5%-100 mV ripple p-p
DC Current 5 VDC (< 1000 mA typical, 1600 mA maximum)

**Environmental conditions
(operating - non-condensing)**

Temperature 41° to 122° F (5° to 50° C)
Relative Humidity 10% to 80%
Maximum Wet Bulb Temperature 84° F (29° C)

Technical Specifications – Networking

NETWORKING

10/100/1000 NIC	
Ethernet Features	10 Mbit/s operation (10BASE-T; IEEE 802.3i; IEEE 802.3 clauses 13-14) 100 Mbit/s operation (100BASE-TX; IEEE 802.3u; IEEE 802.3 clauses 21-30) 1000 Mbit/s operation (1000BASE-T; IEEE 802.3ab; IEEE 802.3 clauses 40) Auto-Negotiation (Automatic Speed Selection) Full Duplex Operation at all Speeds, Half Duplex operation at 10 and 100 Mbit/s
Power Management	ACPI compliant – multiple power modes Situation-sensitive features reduce power consumption Advanced link down power saving for reducing link down power consumption
Performance Features	TCP/IP/UDP Checksum Offload (configurable) Protocol Offload (ARP & NS) Large send offload and Giant send offload Receiving Side Scaling Jumbo Frame 9K
Manageability	Wake-on-LAN from standby and hibernation (Magic Packet and Microsoft Wake-Up Frame); Wake-on-LAN from off (Magic Packet only) PXE 2.1 Remote Boot Statistics Gathering (SNMP MIB II, Ethernet-like MIB, Ethernet MIB (802.3x, clause 30) Comprehensive diagnostic and configuration software suite Virtual Cable Doctor for Ethernet cable status
Interface	PCIe + SMBus
NIC Device Driver Name	PCIe GBE Ethernet Family Controller

Intel I226-T1 2.5GbE Ethernet Network Adapter	
Connector	RJ-45
System Interface	PCI (Intel proprietary) + SMBus
Data rates supported	1. 10 Mbit/s operation (10BASE-T; IEEE 802.3i; IEEE 802.3 clauses 13-14) 2. 100 Mbit/s operation (100BASE-TX; IEEE 802.3u; IEEE 802.3 clauses 21-30) 3. 1000 Mbit/s operation (1000BASE-T; IEEE 802.3ab; IEEE 802.3 clauses 40) 4. 2.5 Gbit/s operation (2.5GBASE-T; IEEE 802.3bz Clause 126) 5. Auto-Negotiation (Automatic Speed Selection) Full Duplex Operation at all Speeds, Half Duplex operation at 10 & 100 Mbit/s
IEEE Compliance	IEEE 802.1p QoS (Quality of Service) Support IEEE 802.1q VLAN support IEEE 802.3x Flow Control (IEEE 802.3 clauses 31-32; configurable) IEEE 802.3az EEE (Energy Efficient Ethernet) IEEE 802.3i 10BASE-T IEEE 802.3u 100BASE-TX IEEE 802.3ab 1000BASE-T IEEE 802.3bz 2.5GBASE-T
Performance	TCP/IP/UDP Checksum Offload (configurable) Protocol Offload (ARP & NS) Large send offload and Giant send offload Receiving Side Scaling(Hash Mode Only) Jumbo Frame 9K

Technical Specifications – Networking

Power consumption	Cable Disconnection: 25mW 100Mbps Full Run: 450mW 1000Mbp Full Run: 1000mW 2500Mbp Full Run: 4500mW WoL Enable(S3/S4/S5): 50mW WoL Disable(S3/S4/S5): 25mW
Power	ACPI compliant – multiple power modes
Management	Situation-sensitive features reduce power consumption Advanced link down power saving for reducing link down power consumption
Management Interface	Auto MDI/MDIX Crossover cable detection
IT Manageability	Wake-on-LAN from modern standby or sleep state (Magic Packet and Microsoft Wake-Up Frame); Wake-on-LAN from off (Magic Packet only) PXE 2.1 Remote Boot Statistics Gathering (SNMP MIB II, Ethernet-like MIB, Ethernet MIB (802.3x, clause 30)) Comprehensive diagnostic and configuration software suite Virtual Cable Doctor for Ethernet cable status

Realtek RTL8852BE-VT 802.11ax 2x2 Wi-Fi 6 + Bluetooth® 5.4 Wireless Card

(802.11ax 2x2, supporting gigabit data rate)

Wireless LAN Standards¹	IEEE 802.11a IEEE 802.11b IEEE 802.11g IEEE 802.11n IEEE 802.11ac IEEE 802.11ax IEEE 802.11d IEEE 802.11e IEEE 802.11h IEEE 802.11i IEEE 802.11k IEEE 802.11r IEEE 802.11v
Interoperability	Wi-Fi certified modules
Frequency Bands	802.11b/g/n/ax • 2.402 – 2.482 GHz 802.11a/n/ac/ax • 4.9 – 4.95 GHz (Japan) • 5.15 – 5.25 GHz • 5.25 – 5.35 GHz • 5.47 – 5.725 GHz • 5.825 – 5.850 GHz
Data Rates	• 802.11b: 1, 2, 5.5, 11 Mbps • 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps • 802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps • 802.11n: max 300Mbps • 802.11ac: max 866.7Mbps • 802.11ax: max 1201Mbps

Technical Specifications – Networking

Modulation	Direct Sequence Spread Spectrum, OFDM, BPSK, QPSK, CCK, 16-QAM, 64-QAM, 256-QAM, 1024QAM
Security²	<ul style="list-style-type: none"> IEEE and WiFi certified 64 / 128 bit WEP encryption for a/b/g mode only AES-CCMP: 128 bit in hardware 802.1x authentication WPA, WPA2: 802.1x, WPA-PSK, WPA2-PSK, TKIP, and AES. WPA2 certification WPA3 certification IEEE 802.11i WAPI
Network Architecture Models	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)
Roaming	IEEE 802.11 compliant roaming between access points
Output Power³	<ul style="list-style-type: none"> 802.11b: +18.5dBm minimum 802.11g: +17.5dBm minimum 802.11a: +18.5dBm minimum 802.11n HT20(2.4GHz): +15.5dBm minimum 802.11n HT40(2.4GHz): +14.5dBm minimum 802.11n HT20(5GHz): +15.5dBm minimum 802.11n HT40(5GHz): +14.5dBm minimum 802.11ac VHT80(5GHz): +11.5dBm minimum 802.11ax HE40(2.4GHz): +10dBm minimum 802.11ax HE80(5GHz): +10dBm minimum
Power Consumption	<ul style="list-style-type: none"> Transmit mode: 2.5 W Receive mode: 2 W Idle mode (PSP) 180 mW (WLAN Associated) Idle mode: 50 mW (WLAN unassociated) Connected Standby/Modern Standby: 10mW Radio disabled: 8 mW
Power Management	ACPI and PCI Express compliant power management 802.11 compliant power saving mode
Receiver Sensitivity⁴	<ul style="list-style-type: none"> 802.11b, 1Mbps: -93.5dBm maximum 802.11b, 11Mbps: -84dBm maximum 802.11a/g, 6Mbps: -86dBm maximum 802.11a/g, 54Mbps: -72dBm maximum 802.11n, MCS07: -67dBm maximum 802.11n, MCS15: -64dBm maximum 802.11ac, MCS0: -84dBm maximum 802.11ac, MCS9: -59dBm maximum 802.11ax, MCS11(HE40): -57dBm maximum 802.11ax, MCS11(HE80): -54dBm maximum

Technical Specifications – Networking

Antenna type	High efficiency antenna with spatial diversity. Two embedded dual band 2.4/5 GHz antennas are provided to the card to support WLAN MIMO communications and Bluetooth communications
Form Factor	PCI-Express M.2 MiniCard
Dimensions	1. Type 2230: 2.4 x 22.0 x 30.0 mm
Weight	1. Type 2230: 2.8g
Operating Voltage	3.3v +/- 9%
Temperature	Operating: 14° to 158° F (-10° to 70° C) Non-operating: -40° to 176° F (-40° to 80° C)
Humidity	Operating: 10% to 90% (non-condensing) Non-operating: 5% to 95% (non-condensing)
Altitude	Operating: 0 to 10,000 ft (3,048 m) Non-operating: 0 to 50,000 ft (15,240 m)
LED Activity	LED Amber – Radio OFF; LED OFF – Radio ON

HP Integrated Module with Bluetooth® 4.0/4.1/4.2/5.0/5.1/5.2/5.3/5.4 Wireless Card Technology

Bluetooth® Specification	4.0/4.1/4.2/5.0/5.1/5.2/5.3/5.4 Wireless Card Compliant
Frequency Band	2402 to 2480 MHz
Number of Available Channels	Legacy: 0~79 (1 MHz/CH) BLE: 0~39 (2 MHz/CH)
Data Rates and Throughput	Legacy: 3 Mbps data rate; throughput up to 2.17 Mbps BLE: 1 Mbps data rate; throughput up to 0.2 Mbps Legacy: Synchronous Connection Oriented links up to 3, 64 kbps, voice channels Legacy: Asynchronous Connection Less links 2178.1 kbps/177.1 kbps asymmetric (3-DH5) or 864 kbps symmetric (3-EV5)
Transmit Power	The Bluetooth component shall operate as a Class II Bluetooth device with a maximum transmit power of + 4 dBm for BR and EDR.
Power Consumption	Peak (Tx): 330 mW Peak (Rx): 230 mW Selective Suspend: 17 mW
Bluetooth Software Supported Link Topology	Microsoft Windows Bluetooth Software
Power Management	Microsoft Windows ACPI, and USB Bus Support
Certifications	FCC (47 CFR) Part 15C/E, Section 15.247, 15.249 ETSI 300 328, ETSI 301 893

Technical Specifications – Networking

Bluetooth Profiles Supported	Bluetooth 4.1-ESR 5/6/7 Compliance LE Link Layer Ping LE Dual Mode LE Link Layer LE Low Duty Cycle Directed Advertising LE L2CAP Connection Oriented Channels Train Nudging & Interlaced Scan Bluetooth 4.2 ESR08 Compliance LE Secure Connection- Basic/Full LE Privacy 1.2 –Link Layer Privacy LE Privacy 1.2 –Extended Scanner Filter Policies LE Data Packet Length Extension FAX Profile (FAX) Basic Imaging Profile (BIP)2 Headset Profile (HSP) Hands Free Profile (HFP) Advanced Audio Distribution Profile (A2DP) Bluetooth 5.1 ESR9/10 Compliance LE Advertisement Extensions Channel Selection Algo Limited High Duty Cycle Non-Connectable Advertising 2Mbps LE LE Long Range
-------------------------------------	--

1. Wi-Fi 6 is designed to support gigabit data rate when transferring files between two devices connected to the same router. Requires a wireless router, sold separately, that supports 80MHz and higher channels.

Wireless access point and Internet service required and sold separately. Availability of public wireless access points limited. Wi-Fi 6 (802.11ax) is backwards compatible with prior 802.11 specs.

2. The FCC has declared as of September 1, 2014 products that utilize passive scanning on channel 12/13 and are capable of transmitting must fully comply with requirements of 15.247 or otherwise disable those channels.

3. Check latest software/driver release for updates on supported security features.

4. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CKK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).

Technical Specifications – Networking

Realtek RTL8852CE 802.11ax 2x2 Wi-Fi 6E + Bluetooth® 5.3 Wireless Card (802.11ax 2x2, supporting gigabit data rate)	
Wireless LAN Standards¹	IEEE 802.11a IEEE 802.11b IEEE 802.11g IEEE 802.11n IEEE 802.11ac IEEE 802.11ax IEEE 802.11d IEEE 802.11e IEEE 802.11h IEEE 802.11i IEEE 802.11k
Interoperability	Wi-Fi certified
Frequency Band	802.11b/g/n/ax • 2.402 – 2.482 GHz 802.11a/n/ac/ax • 5.15 – 5.25 GHz • 5.25 – 5.35 GHz • 5.47 – 5.725 GHz • 5.825 – 5.850 GHz • 5.955 – 6.415 GHz • 6.435 – 6.515 GHz • 6.535 – 6.875 GHz • 6.895 – 7.115 GHz
Data Rates	• 802.11b: 1, 2, 5.5, 11 Mbps • 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps • 802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps • 802.11n: MCS 0 ~ MCS 15, (20MHz, and 40MHz) • 802.11ac: MCS0 ~ MCS9, (20MHz, 40MHz, ,80MHz & 160MHz) • 802.11ax: MCS0 ~ MCS11, (20MHz, 40MHz, ,80MHz & 160MHz)
Modulation	Direct Sequence Spread Spectrum OFDM, BPSK, QPSK, CCK, 16-QAM, 64-QAM, 256-QAM, 1024QAM
Security²	• IEEE and WiFi certified 64 / 128 bit WEP encryption for a/b/g mode only • AES-CCMP: 128 bit in hardware • 802.1x authentication • WPA, WPA2: 802.1x. WPA-PSK, WPA2-PSK, TKIP, and AES. • WPA2 certification • WPA3 (personal) certification • IEEE 802.11i • WAPI • EAP
Network Architecture Models	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)
Roaming	IEEE 802.11 compliant roaming between access points

Technical Specifications – Networking

Output Power³	<ul style="list-style-type: none"> 802.11b: +17dBm minimum 802.11g: +16dBm minimum 802.11a: +17dBm minimum 802.11n HT20(2.4GHz): +14dBm minimum 802.11n HT40(2.4GHz): +13dBm minimum 802.11n HT20(5GHz): +14dBm minimum 802.11n HT40(5GHz): +13dBm minimum 802.11ac VHT80(5GHz): +10dBm minimum 802.11ac VHT160(5GHz): +10dBm minimum 802.11ax HE40(2.4GHz): +12dBm minimum 802.11ax HE80(5GHz): +10dBm minimum 802.11ax HE160(5GHz): +10dBm minimum 802.11ax HE80(6GHz): +10dBm minimum 802.11ax HE160(6GHz): +10dBm minimum
Power Consumption	<ul style="list-style-type: none"> Transmit mode: 2.5 W Receive mode: 2 W Idle mode (PSP) 180 mW (WLAN Associated) Idle mode: 50 mW (WLAN unassociated) Connected Standby/Modern Standby: 10mW Radio disabled: 8 mW
Power Management	ACPI and PCI Express compliant power management 802.11 compliant power saving mode
Receiver Sensitivity⁴	<ul style="list-style-type: none"> 802.11b, 1Mbps: -93.5dBm maximum 802.11b, 11Mbps: -84dBm maximum 802.11a/g, 6Mbps: -86dBm maximum 802.11a/g, 54Mbps: -72dBm maximum 802.11n, MCS07: -67dBm maximum 802.11n, MCS15: -64dBm maximum 802.11ac, MCS0(VHT80): -84dBm maximum 802.11ac, MCS9(VHT80): -59dBm maximum 802.11ac, MCS9(VHT160): -58.5dBm maximum 802.11ax, MCS11(HE40): -57dBm maximum 802.11ax, MCS11(HE80): -54dBm maximum 802.11ax, MCS11(HE160): -53.5dBm maximum
Antenna type	High efficiency antenna with spatial diversity Two embedded tri-band 2.4/5/6 GHz antennas are provided to the card to support WLAN MIMO communications and Bluetooth communications
Form Factor	PCI-Express M.2 MiniCard
Dimensions	1. Type 2230: 2.3 x 22.0 x 30.0 mm
Weight	1. Type 2230: 2.8g
Operating Voltage	3.3v +/- 9%
Temperature	Operating: 14° to 158° F (-10° to 70° C) Non-operating: -40° to 176° F (-40° to 80° C)
Humidity	Operating: 10% to 60% (non-condensing) Non-operating: 5% to 95% (non-condensing)
Altitude	Operating: 0 to 10,000 ft (3,048 m) Non-operating: 0 to 50,000 ft (15,240 m)
LED Activity	N/A

Technical Specifications – Networking

HP Integrated Module with Bluetooth® 4.0/4.1/4.2/5.0/5.1/5.2/5.3 Wireless Card Technology	
Bluetooth® Specification	4.0/4.1/4.2/5.0/5.1/5.2/5.3 Wireless Card Compliant
Frequency Band	2402 to 2480 MHz
Number of Available Channels	Legacy: 0~79 (1 MHz/CH) BLE: 0~39 (2 MHz/CH)
Data Rates and Throughput	Legacy: 3 Mbps data rate; throughput up to 2.17 Mbps BLE: 1 Mbps data rate; throughput up to 0.2 Mbps Legacy: Synchronous Connection Oriented links up to 3, 64 kbps, voice channels Legacy: Asynchronous Connection Less links 2178.1 kbps/177.1 kbps asymmetric (3-DH5) or 864 kbps symmetric (3-EV5)
Transmit Power	The Bluetooth component shall operate as a Class II Bluetooth device with a maximum transmit power of + 4 dBm for BR and EDR.
Power Consumption	Peak (Tx): 330 mW Peak (Rx): 230 mW Selective Suspend: 17 mW
Bluetooth® Software Supported	Microsoft Windows Bluetooth Software
Link Topology	
Power Management	Microsoft Windows ACPI, and USB Bus Support
Certifications	FCC (47 CFR) Part 15C/E, Section 15.247, 15.249, 15.407 ETSI 300 328, ETSI 301 893, ETSI 303 687
Bluetooth® Profiles Supported	Bluetooth 4.1-ESR 5/6/7 Compliance LE Link Layer Ping LE Dual Mode LE Link Layer LE Low Duty Cycle Directed Advertising LE L2CAP Connection Oriented Channels Train Nudging & Interlaced Scan Bluetooth 4.2 ESR08 Compliance LE Secure Connection- Basic/Full LE Privacy 1.2 –Link Layer Privacy LE Privacy 1.2 –Extended Scanner Filter Policies LE Data Packet Length Extension FAX Profile (FAX) Basic Imaging Profile (BIP)2 Headset Profile (HSP) Hands Free Profile (HFP) Advanced Audio Distribution Profile (A2DP) Bluetooth 5.2 ESR9/10 Compliance LE Advertisement Extensions Channel Selection Algo Limited High Duty Cycle Non-Connectable Advertising 2Mbps LE LE Long Range Windows Bluetooth profiles support Bluetooth 5.3 Periodic Advertisement interval Encryption key size control enhancements

Technical Specifications – Networking

1. Wi-Fi 6E requires a Wi-Fi 6E router, sold separately, to function in the 6GHz band. Availability of public wireless access points limited. Wi-Fi 6E is backwards compatible with prior 802.11 specs. And available in countries where Wi-Fi 6E is supported. Wi-Fi 6E is designed to support gigabit data rate when transferring files between two devices connected to the same router. Requires a wireless router, sold separately, that supports 80MHz and higher channels.
2. Check latest software/driver release for updates on supported security features.
3. The FCC has declared as of September 1, 2014 products that utilize passive scanning on channel 12/13 and are capable of transmitting must fully comply with requirements of 15.247 or otherwise disable those channels.
- 4 Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CKK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).

Technical Specifications - Audio

HIGH DEFINITION AUDIO

Type	Integrated
HD Stereo Codec	Realtek ALC3602-CG codec
Audio I/O Ports	Support the combo jack for CTIA and support the Line out.
Multi-streaming Capable	Playback multi-streaming can be enabled in the audio control UI to allow independent audio streams to output to the front and rear jacks or integrated speaker.
HD Audio Codec	ALC3602-CG
Sampling	DAC supports 16bit ~ 24 bit, sampling rate 44.1K/ 48K/ 96K/ 192K Hz ADC supports 16bit ~ 24 bit, sampling rate 44.1K/ 48K/ 96K/ 192K Hz
Wavetable Syntheses	Yes
Analog Audio	Yes
# of Channels on Line-Out	Stereo
External Speaker Jack*	2W class D mono amplifier only. External speakers must be powered externally.

Technical Specifications - Power

POWER SUPPLY

Operating Voltage Range	90 – 264 VAC
Rated Voltage Range	100-240 VAC
Rated Line Frequency	50/60 HZ
Operating Line Frequency	47 – 63 Hz
Rated Input Current	180 W: <2.3A 280W: <3.3A 400W: <5.2A
Rated Input Current with Energy Efficient* Power Supply	180W active PFC / Efficiency at 115Vac 80PLUS Gold certified 87/90/87% at 20/50/100% load Efficiency at 230Vac 90/92/89% at 20/50/100% load Which meet 80PLUS Gold 280W/400W active PFC / Efficiency at 115Vac 80PLUS Platinum certified 90/92/89% efficient at 20/50/100% load Efficiency at 230Vac 91/93/90% at 20/50/100% load Which meet 80PLUS Gold
DC Output	+12 V
Current Leakage (NFPA 99: 2102)	Less than 500 microamps of leakage current at 120 Vac with the ground wire disconnected, as required for Non-patient Electrical Appliances and Equipment used in a patient care facility or that contact patients in normal use. Per section 10.3.5.1. Less than 100 microamps of leakage current at 120 Vac with the ground wire intact with normal polarity, as required for Non-patient Electrical Appliances and Equipment used in a patient care facility or that contact patients in normal use. Per section 10.3.5.1.
Power Supply Fan	180W: 70*25mm (linear type) 280W/400W: 70x25mm (PWM type)

Technical Specifications – Weights and Dimensions

WEIGHT AND DIMENSIONS

Chassis	6.10 x 12.13 x 13.27 in (155 x 308 x 337 mm) (w/ bezel)
System Volume	16 L
System Weight*	13.18 lb / 5.98 kg
Packaged (H x W x D)	11.3 x 15.75 x 19.65 in 287 x 400 x 499 mm
Shipping Weight	19.95 lb / 9.05 kg
Palletization Profile	6 units per layer 7 layer max 42 per pallet Footprint 84.21 x 39.37 x 47.24 in (2139 x 1000 x 1200 mm)

After-Market Options (availability may vary by region)

AFTERMARKET OPTIONS

Type	Description	Part #
Memory	HP 8GB DDR5-5600 DIMM	A9TF0AA
	HP 16GB DDR5-5600 DIMM	A9TF1AA
	HP 32GB DDR5-5600 DIMM	A9TF3AA
Storage	HP PCIe Gen 4 NVME TLC M.2 512GB SSD	406L8AA
	HP PCIe Gen 4 NVME TLC M.2 1TB SSD	406L7AA
	HP 1TB 7200rpm SATA 6Gb/s 3.5" Hard Drive	QK555AA
Graphics	AMD Radeon RX 6300 2GB GDDR6 DP+HDMI	7Y6P7AA
	Intel Arc A380 6GB GDDR6 3DP+HDMI	9Q6G0AA
Networking	Intel I226-T1 2.5GbE Ethernet Network Adapter	9P1U8AA
Security	HP Business PC Security Lock V3 Kit	3XJ17AA
	HP Keyed Cable Lock 10mm kit	T1A62AA
	HP Master Keyed Cable Lock 10mm	T1A63AA
	HP Combination Standard Cable Lock	TOY15AA
	HP Essential Combination Lock	TOY16AA
Cables/Adapters	HP HDMI Standard Cable Kit	T6F94AA
	HP USB to Serial Port Adapter	J7B60AA
	HP PCIe x1 Parallel Port Card	N1M40AA
Input	HP Business Slim v2 Smart Card USB Keyboard	A71J9AA
	HP 125 G2 Wired Keyboard	AY2Y7AA
	HP 125 Wired Mouse	265A9AA
	HP 128 Laser Wired Mouse	265D9AA
	HP Wired Desktop 320M Mouse	9VA80AA
	HP 320K G2 Wired Keyboard	9SR37UT
	HP Wired Desktop 320MK G2 Mouse and Keyboard Combo	9SR36UT
	HP 655 Wireless Keyboard and Mouse Combo G2	4R009UT
	HP 405 Multi-Device Wired Backlit Keyboard	7N7C1AA
	HP 455 G2 Programmable WRLS USB Keyboard	B08ZDAA
	HP 475 Dual-Mode Wireless Keyboard	7N7B9AA
Others	HP S101 Speaker bar	5UU40AA
	HP Z G3 Conferencing Speaker Bar wStand	647Y2AA

Change Log

© Copyright 2025 HP Development Company, L.P. The information contained herein is subject to change without notice. The only warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein. Microsoft and Windows are registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries. Intel, Celeron®, Core, Pentium are registered trademarks or trademarks of Intel Corporation in the U.S. and/or other countries. Bluetooth is a trademark of its proprietor, used by HP Inc. under license. NVIDIA, GeForce, Kepler and NVS are trademarks and/or registered trademarks of NVIDIA Corporation in the U.S. and other countries. AMD and Radeon are trademarks of Advanced Micro Devices, Inc. ENERGY STAR is a registered trademark owned by the U.S. Environmental Protection Agency.

Date of change:	Version History:	Change	Description of change:
January 13, 2025	From v1 to v2	Update	Environmental data updated
January 21, 2025	From V2 to V3	Removal	NECC word removed from Memory section
March 31, 2025	From V3 to V4	Correction	Maximum of displays changed to 2 in DisplayPort in Graphics section
April 15, 2025	From V4 to V5	Correction	Internal Speaker values corrected to none.
July 10, 2025	From V5 to V6	Correction	High-definition audio table values corrected
July 18, 2025	From V6 to V7	Update	TCO Certification added
July 24, 2025	From V7 to V8	Correction	All M.2 2280 PCIe NVMe SSD's interface and speed based corrected to PCIE Gen4x4 and minimum sequential read/write respectively.
July 31, 2025	From V8 to V9	Update	NVIDIA GeForce RTX 5060 added to Graphics sections
October 17, 2025	From V9 to V10	Addition	BIOS added to Software section.
December 9, 2025	From v10 to v11	Update	Bios in SW section updated
	From v11 to v12		
	From v12 to v13		
	From v13 to v14		