


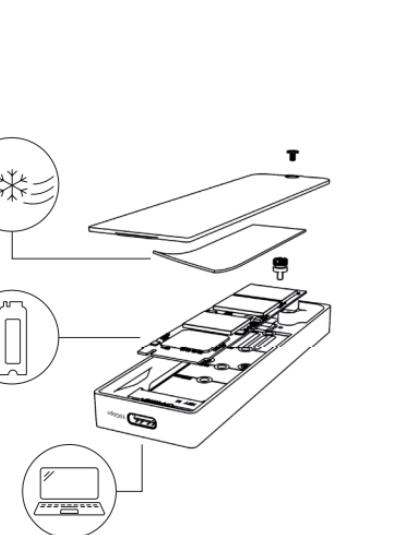
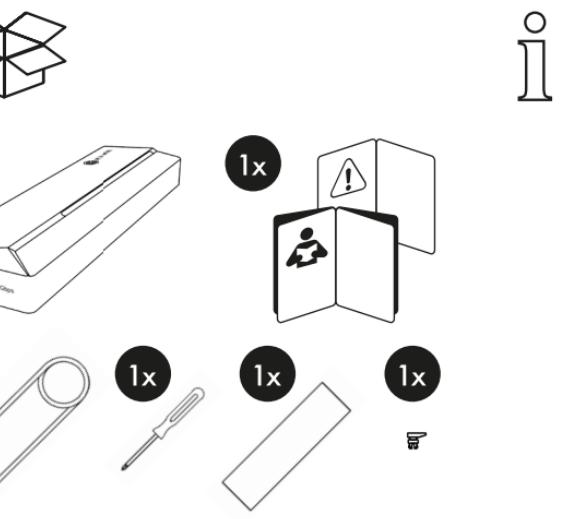


**COVER****IB-1826MCL-CU31**

M.2 SATA/NVMe SSD Enclosure with  
USB 3.2 Gen 2 Type-C® and RGB light

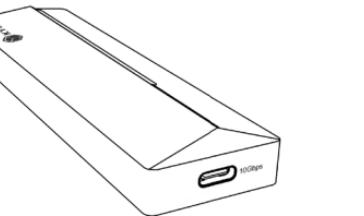

Legacy USB standards	Current USB standards	Data transfer rate
USB 3.0 = USB 3.1 (Gen 1)	= USB 3.2 Gen 1	= 5 Gbit/s
USB 3.1 = USB 3.1 (Gen 2)	= USB 3.2 Gen 2	= 10 Gbit/s
USB 3.2 (Gen 2x2)	= USB 3.2 Gen 2x2	= 20 Gbit/s
	= USB4® Gen 2x1	= 10 Gbit/s
	= USB4® Gen 2x2	= 20 Gbit/s
	= USB4® Gen 3x2	= 40 Gbit/s

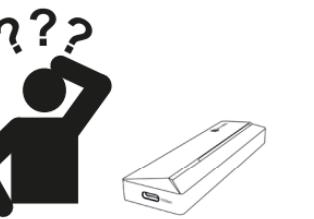

[www.icybox.de](http://www.icybox.de)

**BACK**

Verifica le disposizioni del tuo Comune.



© Copyright 2025 by RaidSonic Technology GmbH. All Rights Reserved.  
The information contained in this manual is believed to be accurate and reliable.  
RaidSonic Technology GmbH assumes no responsibility for any errors contained in  
this manual. RaidSonic Technology GmbH reserves the right to make changes in the  
specifications and/or design of the above-mentioned product without prior notice.  
The diagrams contained in this manual may also not fully represent the product  
that you are using and are there for illustration purposes only. RaidSonic Technology  
GmbH assumes no responsibility for any differences between the product mentioned  
in this manual and the product you may have. Apple and macOS are registered  
trademarks of Apple Computer Inc. Microsoft, Windows and the Windows logo are  
registered trademarks of Microsoft Corporation. USB Type-C and USB-C are regis-  
tered trademarks of USB Implementers Forum.

