




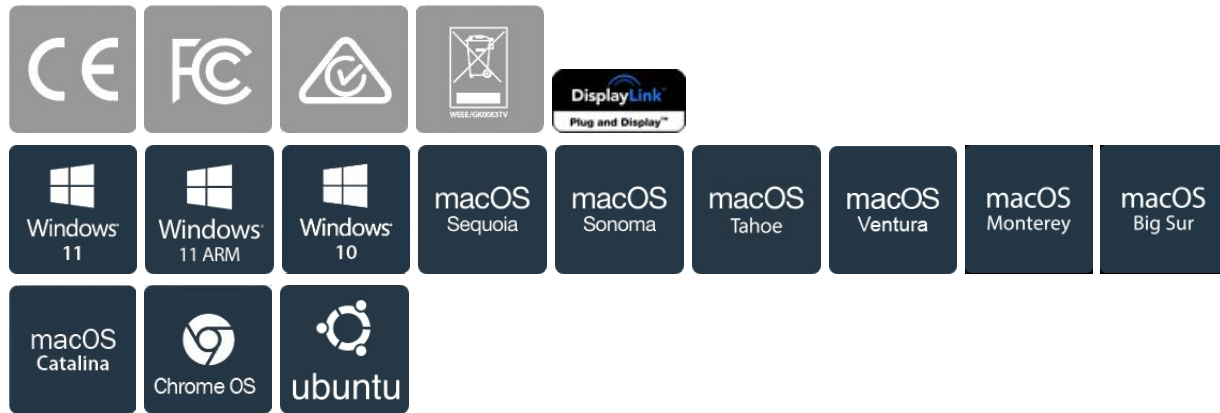

Applications

- Gestion centralise des docks pour surveiller, scuriser et mettre jour distance l'ensemble des stations d'accueil du parc informatique
- Standardisez les postes de travail dual-cran sur tous les appareils grce un dock universel unique compatible tout OS

Features

- Centralized Dock Management: Smart Dock Manager software gives IT teams real-time visibility and control, for faster ticket response and issue identification; Remotely push firmware updates and monitor connection and port status across deployments
- Standardize Across Any OS Environment: DisplayLink-based HDMI or DisplayPort outputs support consistent dual-monitor setups across mixed hardware, while Windows, macOS, Linux, and ChromeOS support enables one dock across diverse laptop deployments
- Simplify Deployment at Any Scale: INF, EXE, and MSI DisplayLink installer options support manual installs, user-friendly setup, or automated enterprise rollouts, helping IT teams align deployment methods with operational needs
- Provide Consistent Workspace Experiences: Gigabit Ethernet, 7x USB, and 96W power delivery ensure users stay connected and charged when working in hot desk environments, keeps users productive and simplifies shared workspace setups for IT teams
- The IT Pro's Choice: Rigorously tested in our Innovation Lab across 100+ monitors and major laptop brands before it reaches your environment; Deliver reliable, cross-platform performance backed by free lifetime 24/5 multilingual technical assistance

General

UPC	065030917117
Warranty	3 Years

Special Notes / Requirements

Special Notes	USB 3.2 Gen 2 (10Gbps) is also known as USB 3.1 Gen 2 (10Gbps)
	USB 3.2 Gen 1 (5Gbps) is also known as USB 3.1 Gen 1 (5Gbps) and USB 3.0 (5Gbps)
	Jumbo Frames are no longer supported in macOS

Power

Power Source	AC Adapter Included
Power Delivery	96W
Input Voltage	100 - 240 AC
Input Current	1.9A
Output Voltage	20V DC
Output Current	6.75
Center Tip Polarity	Positive
Power Consumption	135W

Physical & Environmental

Color	Space Gray
Material	Plastic
Product Length	8.0 in [202 mm]
Product Width	3.7 in [95 mm]
Product Height	1.3 in [32 mm]
Weight of Product	12.7 oz [360 g]
Operating Temperature	0C to 40C (32F to 104F)
Storage Temperature	-20C to 70C (-4F to 158F)
Humidity	20% ~ 80% RH

Performance

Supported Charging Outputs	BC 1.2 (1.5A)
----------------------------	---------------

	USB-C (20W)
Maximum Data Transfer Rate	4K 60Hz
Type and Rate	USB 10Gbps
UASP Support	Yes
Compatible Networks	10/100/1000 Mbps
PXE	Yes
Wake-On-LAN (WOL)	Yes
MTBF	10,000 Hours
Maximum Digital Resolutions	4K 60Hz

Hardware

Fast-Charge Port(s)	Yes
4K Support	Yes
Displays Supported	2
Number of Battery Charge 1.2 Ports	1
Audio	Yes
Interface	USB 10Gbps
Bus Type	USB-C
Compatible Lock Slot	Kensington Standard Slot (K-Slot) Kensington Nano Slot
Number of Displays	2
Chipset ID	DisplayLink - DL-6950 VIA Labs - VL108 VIA Labs - VL822 VIA Labs - VL817

VIA Labs - VL122

Realtek - RTL8153B

LED Indicators

1 - Power:

<i>Solid </i>- The dock is powered on

<i>Off </i>- The dock is not connected to power

1 - Docking Station LED:

<i>Off</i> - Dock is not received power

<i>Solid Red</i> - LAN is disconnected

<i>Solid Green</i> - LAN is connected

<i>Solid Blue</i> - Application is connected

<i>Flashing Blue</i> - Docking Station firmware is updating

<i>Flashing White</i> - Docking station is pending a firmware update

Packaging & In-the-Box

Included in Package

1 - Docking Station

1 - USB-C Host Cable

1 - Universal Power Adapter (NA)

1 - Product Documentation

Package Width

5.5 in [140 mm]

Package Depth

10.0 in [255 mm]

Package Height

3.5 in [90 mm]

Shipping (Package) Weight

38.8 oz [1100 g]

Connector(s)

Host Connector 1 (Quantity)

1

Host Connector 1

USB-C (10Gbps, 4.5W)

Connector 1 (Quantity)

1

Connector 1

USB-A (5Gbps, 7.5W)

Connector 2 (Quantity)	1
Connector 2	USB-C (10Gbps, 20W)
Connector 3 (Quantity)	1
Connector 3	USB-C (10Gbps, 4.5W)
Connector 4 (Quantity)	1
Connector 4	3.5mm (4 Conductors, TRRS)
Connector 5 (Quantity)	2
Connector 5	USB-A (10Gbps, 4.5W)
Connector 6 (Quantity)	2
Connector 6	USB-A (5Gbps, 4.5W)
Connector 7 (Quantity)	2
Connector 7	DisplayPort
Connector 8 (Quantity)	2
Connector 8	HDMI
Connector 9 (Quantity)	1
Connector 9	RJ-45

****Product appearance and specifications are subject to change without notice.***