
VA249HG3/VA279HG3 series
LCD Monitor
User Guide

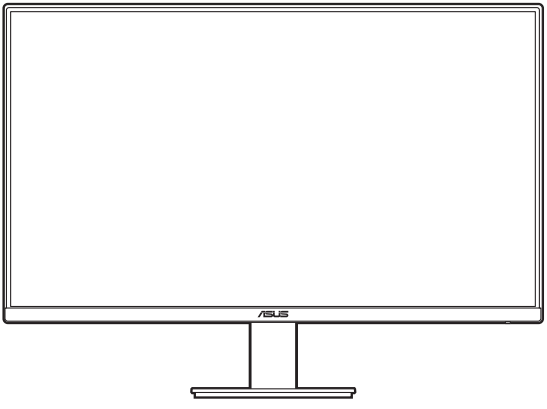

HIGH-DEFINITION MULTIMEDIA INTERFACE

First Edition

August 2026

Copyright © 2026 ASUSTeK COMPUTER INC. All Rights Reserved.

No part of this manual, including the products and software described in it, may be reproduced, transmitted, transcribed, stored in a retrieval system, or translated into any language in any form or by any means, except documentation kept by the purchaser for backup purposes, without the express written permission of ASUSTeK COMPUTER INC. (“ASUS”).

Product warranty or service will not be extended if: (1) the product is repaired, modified or altered, unless such repair, modification or alteration is authorized in writing by ASUS; or (2) the serial number of the product is defaced or missing.

ASUS PROVIDES THIS MANUAL “AS IS” WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTIES OR CONDITIONS OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. IN NO EVENT SHALL ASUS, ITS DIRECTORS, OFFICERS, EMPLOYEES OR AGENTS BE LIABLE FOR ANY INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES (INCLUDING DAMAGES FOR LOSS OF PROFITS, LOSS OF BUSINESS, LOSS OF USE OR DATA, INTERRUPTION OF BUSINESS AND THE LIKE), EVEN IF ASUS HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES ARISING FROM ANY DEFECT OR ERROR IN THIS MANUAL OR PRODUCT.

SPECIFICATIONS AND INFORMATION CONTAINED IN THIS MANUAL ARE FURNISHED FOR INFORMATIONAL USE ONLY, AND ARE SUBJECT TO CHANGE AT ANY TIME WITHOUT NOTICE, AND SHOULD NOT BE CONSTRUED AS A COMMITMENT BY ASUS. ASUS ASSUMES NO RESPONSIBILITY OR LIABILITY FOR ANY ERRORS OR INACCURACIES THAT MAY APPEAR IN THIS MANUAL, INCLUDING THE PRODUCTS AND SOFTWARE DESCRIBED IN IT.

Products and corporate names appearing in this manual may or may not be registered trademarks or copyrights of their respective companies, and are used only for identification or explanation and to the owners’ benefit, without intent to infringe.

Contents

Contents ..... **iii**
Notices ..... **iv**
Safety information ..... **vi**
Care & Cleaning ..... **vii**
Takeback Services ..... **viii**
Product information for EU energy label ..... **viii**

Chapter 1: Product introduction

1.1 Welcome! **1-1**
1.2 Package contents **1-1**
1.3 Monitor introduction **1-2**
1.3.1 Front view 1-2
1.3.2 Back view 1-3

Chapter 2: Setup

2.1 Assembling the monitor arm/base **2-1**
2.2 Detaching the arm/base (for VESA wall mount) **2-2**
2.3 Adjusting the monitor **2-3**
2.4 Connecting the cables **2-4**
2.5 Turning on the monitor **2-4**

Chapter 3: General instructions

3.1 OSD (On-Screen Display) menu **3-1**
3.1.1 How to reconfigure 3-1
3.1.2 OSD function introduction 3-2
3.2 Specifications summary **3-11**
3.3 Outline dimensions **3-13**
3.4 Troubleshooting (FAQ) **3-15**
3.5 Supported operating modes **3-16**

Notices

Federal Communications Commission Statement

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- This device may not cause harmful interference, and
- This device must accept any interference received including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.



The use of shielded cables for connection of the monitor to the graphics card is required to assure compliance with FCC regulations. Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

ENERGY STAR complied product



ENERGY STAR is a joint program of the U.S. Environmental Protection Agency and the U.S. Department of Energy helping us all save money and protect the environment through energy efficient products and practices.

All ASUS products with the ENERGY STAR logo comply with the ENERGY STAR standard, and the power management feature is enabled by default. The monitor and computer are automatically set to sleep after 10 and 30 minutes of user inactivity. To wake your computer, click the mouse or press any key on the keyboard. Please visit http://www.energystar.gov/powermanagement for detail information on power management and its benefits to the environment. In addition, please visit http://www.energystar.gov for detail information on the ENERGY STAR joint program.

NOTE: Energy Star is NOT supported on FreeDOS and Linux-based operating system.

Canadian Department of Communications Statement

This digital apparatus does not exceed the Class B limits for radio noise emissions from digital apparatus set out in the Radio Interference Regulations of the Canadian Department of Communications.

This class B digital apparatus complies with Canadian ICES-003.

This Class B digital apparatus meets all requirements of the Canadian Interference - Causing Equipment Regulations.

Cet appareil numérique de la classe B respecte toutes les exigences du Réglement sur le matériel brouiller du Canada.

WEEE Symbol Statement



The Waste Electrical and Electronic Equipment (WEEE) Directive (Directive 2012/19/EU) is a European Union law that aims to reduce the environmental impact of electrical and electronic equipment. It mandates producers to take responsibility for the end-of-life management of their products, promoting collection, treatment, and recycling to minimize waste and encourage resource recovery.

Do not throw your Electronic and electrical equipment in municipal waste.

The symbol of the crossed-out wheeled bin on the product or packaging indicates that this product (including any batteries it contains), must not be disposed of with your household waste.


To prevent potential harm to the environment and human health, a collection framework should be used to return, recycle, and recover waste electrical and electronic equipment (WEEE), and this product has been designed to enable the reuse of parts and facilitate the recycling of certain materials.

Improper disposal may involve risks due to the presence of hazardous substances within electrical and electronic equipment, such as lead and BFR and other harmful components.

Check your local recycling services for electronic products.

(https://esg.asus.com/en/circular-economy/resource-regeneration/global-take-back-service)

New Mexico PFAS Labeling

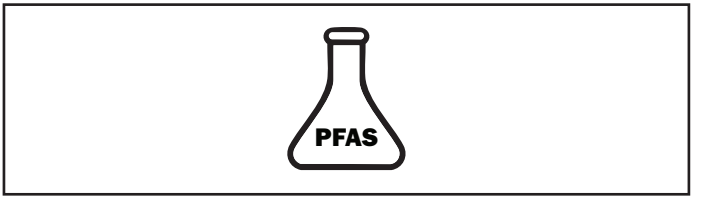

AEEE yönetmeliğine uygundur

Safety information

- Before setting up the monitor, carefully read all the documentation that came with the package.
- To prevent fire or shock hazard, never expose the monitor to rain or moisture.
- Never try to open the monitor cabinet. The dangerous high voltages inside the monitor may result in serious physical injury.
- If the power supply is broken, do not try to fix it by yourself. Contact a qualified service technician or your retailer.
- Before using the product, make sure all cables are correctly connected and the power cables are not damaged. If you detect any damage, contact your dealer immediately.
- Slots and openings on the back or top of the cabinet are provided for ventilation. Do not block these slots. Never place this product near or over a radiator or heat source unless proper ventilation is provided.
- The monitor should be operated only from the type of power source indicated on the label. If you are not sure of the type of power supply to your home, consult your dealer or local power company.
- Use the appropriate power plug which complies with your local power standard.
- Do not overload power strips and extension cords. Overloading can result in fire or electric shock.
- Avoid dust, humidity, and temperature extremes. Do not place the monitor in any area where it may become wet. Place the monitor on a stable surface.
- Unplug the unit during a lightning storm or if it will not be used for a long period of time. This will protect the monitor from damage due to power surges.
- Never push objects or spill liquid of any kind into the slots on the monitor cabinet.

- To ensure satisfactory operation, use the monitor only with UL listed computers which have appropriate configured receptacles marked between 100-240V AC.
- If you encounter technical problems with the monitor, contact a qualified service technician or your retailer.
- Adjustment of the volume control as well as the equalizer to other settings than the center position may increase the ear-/headphones output voltage and therefore the sound pressure level.
- Ensure to connect the power cord to a socket-outlet with earthing connection.
- The supplied power adapter and/or power cable are designed to use with the product only. Do not use with other products.

Care & Cleaning

- Before you lift or reposition your monitor, it is better to disconnect the cables and power cord. Follow the correct lifting techniques when positioning the monitor. When lifting or carrying the monitor, grasp the edges of the monitor. Do not lift the display by the stand or the cord.
- Cleaning. Turn your monitor off and unplug the power cord. Clean the monitor surface with a lint-free, non-abrasive cloth. Stubborn stains may be removed with a cloth dampened with mild cleaner.
- Avoid using a cleaner containing alcohol or acetone. Use a cleaner intended for use with the monitor. Never spray cleaner directly on the screen, as it may drip inside the monitor and cause an electric shock.

The following symptoms are normal with the monitor:

- You may find slightly uneven brightness on the screen depending on the desktop pattern you use.
- When the same image is displayed for hours, an afterimage of the previous screen may remain after switching the image. The screen will recover slowly or you can turn off the Power Switch for hours.
- When the screen becomes black or flashes, or cannot work anymore, contact your dealer or service center to fix it. Do not repair the screen by yourself!

Conventions used in this guide


WARNING: Information to prevent injury to yourself when trying to complete a task.


CAUTION: Information to prevent damage to the components when trying to complete a task.


IMPORTANT: Information that you MUST follow to complete a task.


NOTE: Tips and additional information to aid in completing a task.

Where to find more information

Refer to the following sources for additional information and for product and software updates.

1. **ASUS websites**

   The ASUS websites worldwide provide updated information on ASUS hardware and software products. Refer to http://www.asus.com

2. **Optional documentation**

   Your product package may include optional documentation that may have been added by your dealer. These documents are not part of the standard package.

3. **About Flicker**

   https://www.asus.com/Microsite/display/eye_care_technology/


Takeback Services

ASUS recycling and takeback programs come from our commitment to the highest standards for protecting our environment. We believe in providing solutions for our customers to be able to responsibly recycle our products, batteries and other components as well as the packaging materials.

Please go to http://csr.asus.com/english/Takeback.htm for detail recycling information in different region.

Product information for EU energy label

VA249HG3 VA279HG3



Say hello to a more sustainable product

IT products are associated with a wide range of sustainability risks throughout their life cycle. Human rights violations are common in the factories. Harmful substances are used both in products and their manufacture. Products can often have a short lifespan because of poor ergonomics, low quality and when they are not able to be repaired or upgraded.

This product is a better choice. It meets all the criteria in TCO Certified, the world's most comprehensive sustainability certification for IT products. Thank you for making a responsible product choice, that help drive progress towards a more sustainable future!

Criteria in TCO Certified have a life-cycle perspective and balance environmental and social responsibility. Conformity is verified by independent and approved verifiers that specialize in IT products, social responsibility or other sustainability issues. Verification is done both before and after the certificate is issued, covering the entire validity period. The process also includes ensuring that corrective actions are implemented in all cases of factory non-conformities. And last but not least, to make sure that the certification and independent verification is accurate, both TCO Certified and the verifiers are reviewed regularly.

Want to know more?

Read information about TCO Certified, full criteria documents, news and updates at **tcocertified.com.** On the website you'll also find our Product Finder, which presents a complete, searchable listing of certified products.

1.1 Welcome!

Thank you for purchasing the ASUS® LCD monitor!

The latest widescreen LCD monitor from ASUS provides a broader, brighter and crystal-clear display, plus a host of features that enhance your viewing experience.

With these features, you can enjoy the convenience and delightful visual experience that the monitor brings to you!

1.2 Package contents

Check your package for the following items:

- ✓ LCD monitor
- ✓ Monitor base
- ✓ Quick start guide
- ✓ Warranty card
- ✓ Power cord
- ✓ HDMI cable (optional)
- ✓ VGA cable (optional)




If any of the above items is damaged or missing, contact your retailer immediately.



If you need to replace the power cord or the connection cable(s), please contact ASUS customer service.

1.3 Monitor introduction

1.3.1 Front view

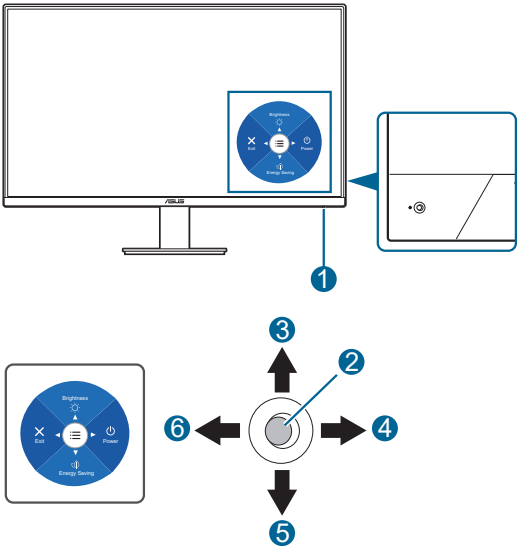

1. Power indicator
   - The color definition of the power indicator is as the below table.


Status	Description
White	On
Amber	Standby mode
Off	Off

2. Central button:
   - Press this button to turn the monitor on during standby mode.
   - Press this button to display the OSD menu when the OSD is off.
   - Enters the OSD menu.
3. Up key:
   - Press this button to turn the monitor on during standby mode.
   - **Brightness** shortcut key. To change the hotkey function, go to the **Shortcut** > **Shortcut 1** menu.
   - Move the option upwards or increase the option value.
4. Right key:

- Press this button to turn the monitor on during standby mode.
- Power Off shortcut key.
- Enter the option of the next layer.

5. Down key:
   - Press this button to turn the monitor on during standby mode.
   - **Energy Saving** shortcut key. To change the hotkey function, go to the **Shortcut** > **Shortcut 2** menu.
   - Key Lock shortcut key. Press and hold it for 5 seconds to enable/disable Keys Lock.
6. Left key:
   - Press this button to turn the monitor on during standby mode.
   - Exit the OSD menu or return to the previous layer.

1.3.2 Back view

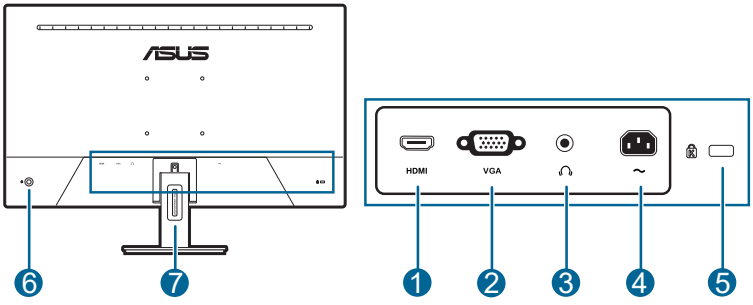


1. **HDMI port.** This port is for connection with an HDMI compatible device.
2. **VGA port.** This 15-pin port is for PC VGA connection.
3. **Earphone jack.** This port is only available when an HDMI cable is connected.
4. **AC-IN port.** This port connects the power cord.
5. **Kensington lock slot.**
6. **Control button**.
7. **Cable management slot.**

2.1 Assembling the monitor arm/base

To assemble the monitor base:

1. Have the front of the monitor face down on a table.
2. Insert the arm hinge into the rear of the monitor.
3. Attach the base into the arm, making sure the tab on the base fits into the groove on the arm.

We recommend that you cover the table surface with soft cloth to prevent damage to the monitor.

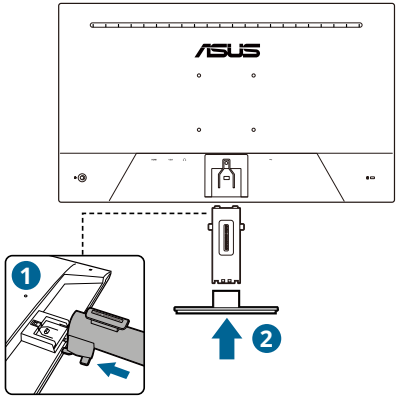


2.2 Detaching the arm/base (for VESA wall mount)

The detachable arm/base of this monitor is specially designed for VESA wall mount.

To detach the arm/base:

1. Have the front of the monitor face down on a table.
2. Press the release button and detach the stand (arm and base) from the monitor.

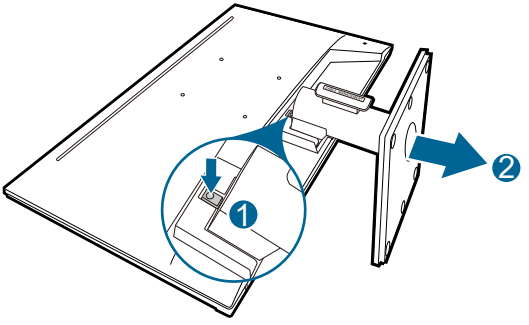


We recommend that you cover the table surface with soft cloth to prevent damage to the monitor.

- The VESA wall mount kit (100 x 100 mm) is purchased separately.
- Use only the UL Listed Wall Mount Bracket with minimum weight/load 22.7kg (Screw size: M4 x 10 mm)

2.3 Adjusting the monitor

- For optimal viewing, we recommend that you look at the full face of the monitor, then adjust the monitor to the angle that is most comfortable for you.
- Hold the stand to prevent the monitor from falling when you change its angle.
- The recommended adjusting angle is +23˚ to -5˚ (for tilt).




(Tilt)

It is normal that the monitor slightly shakes while you adjust the viewing angle.

2.4 Connecting the cables

Connect the cables as the following instructions:

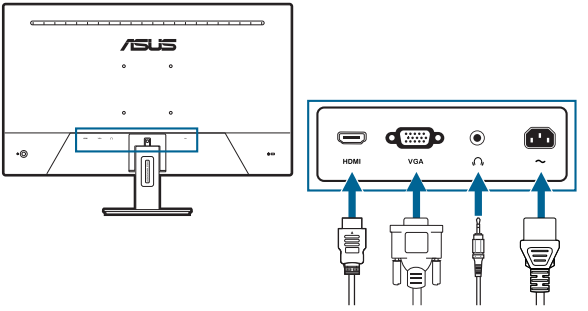

- **To connect the power cord**: Connect one end of the power cord securely to the monitor's AC input port, the other end to a power outlet.
- **To connect the VGA/HDMI cable**:
  a. Plug one end of the VGA/HDMI cable to the monitor's VGA/HDMI jack.
  b. Connect the other end of the VGA/HDMI cable to your computer's VGA/HDMI jack.
  c. Tighten the two screws to secure the VGA connector.
- **To use the earphone:** connect the audio cable to the monitor's earphone jack.

When these cables are connected, you can choose the desired signal from the **Input** item in the OSD menu.


If you need to replace the power cord or the connection cable(s), please contact ASUS customer service.

2.5 Turning on the monitor

Press the central or right button. See page 1-2 for the location of these buttons. The power indicator lights up in white to show that the monitor is ON.

3.1 OSD (On-Screen Display) menu

3.1.1 How to reconfigure

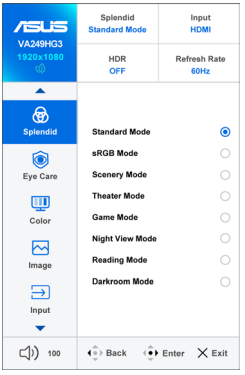


1. Press the Central button to display the OSD menu.
2. Press the Up and Down keys to toggle between options in the OSD menu. As you move from one icon to another, the option name is highlighted.
3. To select the highlighted item on the menu, press the Central button.
4. Press the Up and Down keys to select the desired parameter.
5. Press the Central key to enter the slide bar and then use the Up, Down, Left, right keys, according to the indicators on the menu, to make your changes.
6. To exit and save the OSD meun, press the Left key repeatedly until the OSD menu disappears. To adjust other functions, repeat steps 1-5.

- **ASUS DisplayWidget Center**: Displays a QR code for you to access the information about ASUS DisplayWidget Center.

3.1.2 OSD function introduction

1. Splendid

This function contains 8 sub-functions you can select for your preference.

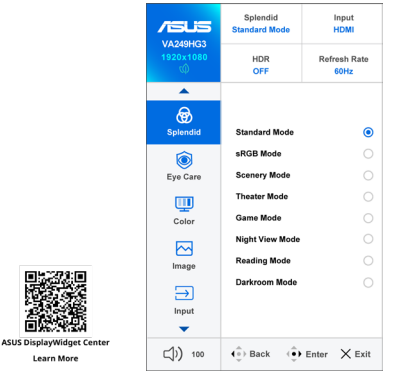

- **Standard Mode**: Best choice for document editing with Splendid Video Enhancement.


Standard Mode meets Energy Star® requirements.

- **sRGB Mode**: Best choice for viewing photos and graphics from PCs.
- **Scenery Mode:** Best choice for scenery photo display with Splendid Video Enhancement.
- **Theater Mode:** Best choice for movies with Splendid Video Enhancement.
- **Game Mode:** Best choice for game playing with Splendid Video Enhancement. For ultimate gaming experience, set the refresh rate to 180Hz (overclocking).
- **Night View Mode:** Best choice for dark-scene games or movies with Splendid Video Enhancement.
- **Reading Mode**: This is the best choice for book reading.
- **Darkroom Mode**: This is the best choice for a weak ambient light environment.

- In the **Standard Mode**, the following function(s) are not user-configurable: **Saturation**, **ASCR**.
- In the **sRGB mode**, the following function(s) are not user-configurable: **Color Augmentation**, **Contrast**, **Saturation**, **Color Temp.**, **Sharpness**, **ASCR**.
- In the **Reading mode**, the following function(s) are not user-configurable: **Contrast**, **Saturation**, **Color Temp.**, **ASCR**.

2. Eye Care

In this function, you can adjust settings to better protect your eyes.

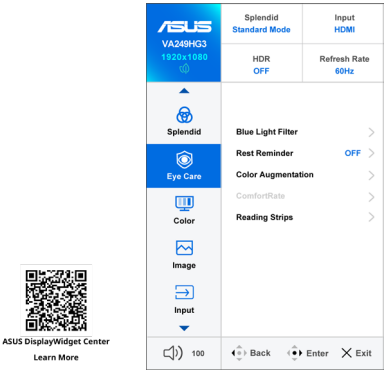

- **Blue Light Filter:** In this function, you can adjust the blue light filter from 0 to Max.
  - **0**: No change.
  - **Max**: The higher the level, the less blue light is scattered. When **Blue Light Filter** is activated, the default settings of **Standard Mode** will be automatically imported. Besides maximum level, the brightness is user-configurable. Maximum is the optimized setting. It is in compliance with TUV low blue light certification*. The brightness function is not user configurable.

*When color augmentation is in default value (50).

Please refer to the following to alleviate eye strains:

- Users should take some time away from the display if working for long hours. It is advised to take short breaks (at least 5 mins) after around 1 hour of continuous working at the computer. Taking short and frequent breaks is more effective than a single longer break.
- To minimize eye strain and dryness in your eyes, users should rest the eye periodically by focusing on objects that are far away.
- Eye exercises can help to reduce eye strain. Repeat these exercises often. If eye strain continues, please consult a physician. Eye exercises: (1) Repeating look up and down (2) Slowly roll your eyes (3) Move your eyes diagonally.
- High energy blue light may lead to eye strain and AMD (Age-Related Macular Degeneration). Blue light filter reduces 70% (max.) of harmful blue light to avoid CVS (Computer Vision Syndrome) when the user adjusts blue light filter bar to maximum level.

- **Rest Reminder**: This function provides you a rest reminder according to how long you set for your working time. For example, if you set a 30-minute working time and there will be a pop-up reminder appearing on the upper left corner of the monitor for 5 seconds when time is up. Press any key to make this reminder OSD disappear.
- **Color Augmentation**: The adjusting range of color enhancement is from 0 to 100.

This function is not available when **sRGB Mode** is selected in the **Splendid** menu.


- **ComfortRate**: Designed to enhance your viewing experience by stabilizing the refresh rate within a specified range.

To enable **ComfortRate**, FreeSync needs to be enabled.

- **Reading Strips**: Enhancing visual focus and tracking through a monitor colored transparent window to minimize distractions and eye strain for a smoother reading experience.
  * **Mode 1**: Fixed focus strip mode. Use Up/Down key to adjust position. Use Right/Left key to adjust strip height.
  * **Mode 2**: Auto moved strip mode. Use Up/Down key to adjust speed of movement. Use Right/Left key to adjust strip height.

3. Color

Set a desired color setting from this menu.

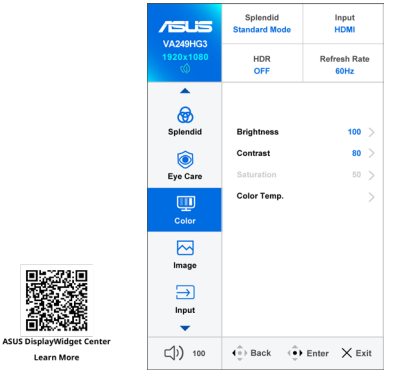


- **Brightness**: The adjusting range is from 0 to 100.
- **Contrast**: The adjusting range is from 0 to 100.
- **Saturation**: The adjusting range is from 0 to 100.

- **Color Temp.**: Contains 4 modes including **Cool**, **Normal**, **Warm** and **User Mode**.

4. Image

Set the image related setting from this menu.

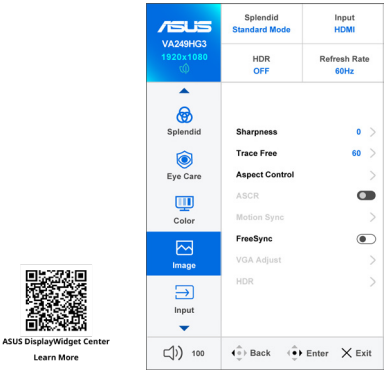

- **Sharpness**: The adjusting range is from 0 to 100.
- **Trace Free**: Adjusts the response time of the monitor.
- **Aspect Control**: Adjusts the aspect ratio to **Full**, **Dot to Dot** or **1:1 Ratio**.
- **ASCR**: Turns on/off the ASCR (ASUS Smart Contrast Ratio) function.
- **Motion Sync**: Offers a more clear mode while displaying motion pictures. Please note this function only works when the refresh rate is over 75Hz. It includes two modes: **Normal Mode** and **Advanced Mode**, which can provide different effects.

- When this function is enabled, the system will automatically reduce the brightness level.
- If the **FreeSync** is enabled, the **Motion Sync** function is grayed out.

- **FreeSync**: Allows a FreeSync supported graphics source to dynamically adjust display refresh rate based on typical content frame rates for power efficient, virtually stutter free and low-latency display update.

This function is not available when **Motion Sync** is enabled.

- **VGA Adjust** (Only available for models with VGA input)
  - **H-Position/V-Position**: Adjusts the horizontal position (**H-Position**) and the vertical position (**V-Position**) of the image. The adjusting range is from 0 to 100.

* **Focus Phase/Focus Clock**: Reduces Horizonal-line noise and Vertical-line noise of the image by adjusting Phase (**Focus Phase**) and Clock (**Focus Clock**) separately. The adjusting range is from 0 to 100.


- Phase adjusts the phase of the pixel clock signal. With a wrong phase adjustment, the screen shows horizontal disturbances.
- Clock (pixel frequency) controls the number of pixels scanned by one horizontal sweep. If the frequency is not correct, the screen shows vertical stripes and the image is not proportional.

* **Auto**: Automatically adjusts the image to its optimized position, clock, and phase (for VGA mode only).

- **HDR**: HDR: This function has two modes, **Gaming** and **Cinema**. The default is **Cinema**.

5. Input


In this function, you can select your desired input source or decide if you want the monitor to automatically search for input sources.

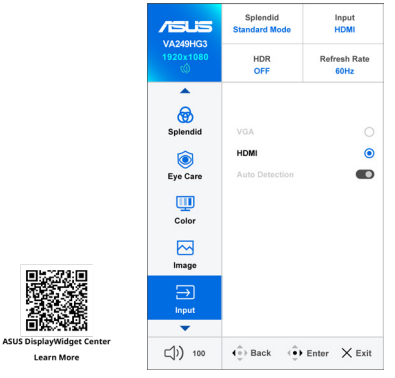

- **VGA/HDMI**: Manually selects the input source.
- **Auto Detection**: When enabled, the system will automatically select the latest inserted I/O port.


6. Settings

Allows you to adjust the system.

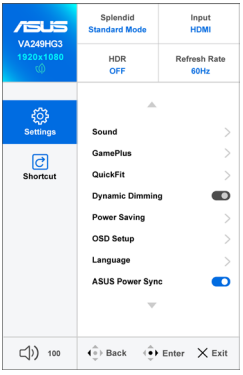

ASUS DisplayWidget Center
Learn More

- **Sound**:
  - **Volume:** The adjusting range is from 0 to 100.
  - **Mute**: Toggles the monitor sound between on and off.
- **GamePlus**: The GamePlus function provides a toolkit and creates a better gaming environment for users when playing different types of games.
  - **Crosshair**: The crosshair overlays with 6 different crosshair options letting you choose the one that best suits the game you're playing.
  - **Timer**: You can position the timer on the upper left corner of the display so you can keep track of the gaming time.
  - **FPS Counter**: The FPS (frames per second) counter lets you know how smooth the game is running.
- **QuickFit:** You can have a preview of the document or photo layout directly on screen without printing test copies.

A4 (only for VA279HG3)	B5
	
8x10, 5x7	**4x6, 3x5, 2x2**
	

- **Dynamic Dimming**: Synchronizes with contents while contrast changing to execute backlight dynamic dimming.

When this function is activated, the following function(s) will be disabled: **ASCR**, **Motion Sync**.


This product meets the TCO/TUV Flicker-Free criteria when **Dynamic Dimming** is set to **OFF**, **Splendid** is in **Standard Mode** and **Power Saving** is at **Normal Level**.

- **Power Saving**: Reduces power consumption. The default setting is **Deep Level**. When **Deep Level** is selected, the maximum brightness value is fixed and **Splendid** mode is fixed at **Standard Mode**.
- **OSD Setup**:
  - **OSD Timeout**: Adjusts the OSD timeout from 10 to 120 seconds.
  - **DDC/CI**: Enables or disables the DDC/CI function.
  - **Transparency**: Adjusts the OSD background from opaque to transparent.
- **Language**: There are 23 languages for your selection, including English, French, German, Italian, Spanish, Dutch, Portuguese, Russian, Czech, Croatian, Polish, Romanian, Hungarian, Turkish, Simplified Chinese, Traditional Chinese, Japanese, Korean, Thai, Indonesian, Persian, Ukrainian, Vietnamese.
- **ASUS Power Sync**: Enables or disables the ASUS Power Sync function. To activate this function, please enable this function of the monitor via HDMI port.


When **Auto Detection** is enabled, the monitor won't switch to DC OFF once the source device is turned off.


Please take a look at the ASUS website to check which devices are compatible with this function. To enable monitor to turn on and off the hardware or vise versa, please set up your computer BIOS by the following.

- BIOS set up instruction for ASUS NUC:

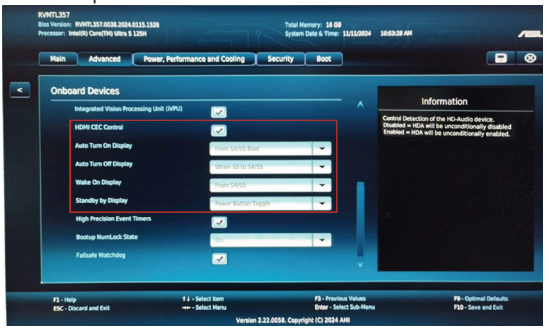

- BIOS set up instruction for ASUS Mini PC:

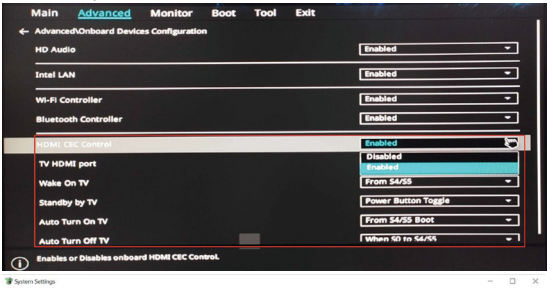

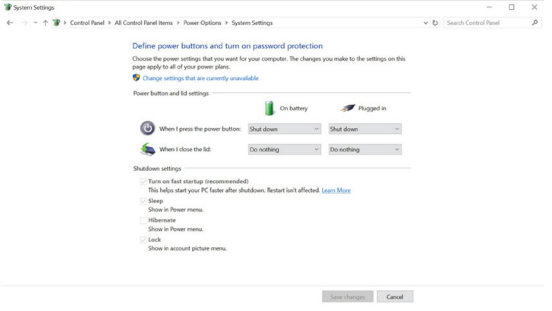

- **Key Lock**: To disable all function keys. Press the Down key for over 5 seconds to cancel the key lock function.
- **Information**: Shows the monitor information.
- **Power Indicator**: Turns the power LED indicator on/off.
- **Power Key Lock**: Enables or disables the power key.
- **All Reset**: **Yes** Allows you to restore the default settings.

7. Shortcut

Defines the functions for Shortcut 1 and 2 buttons.



- **Shortcut 1/Shortcut 2**: Selects a function for Shortcut 1 and 2 buttons.

When a certain function is selected or activated, your shortcut key may not support. Available function choices for shortcut: **Blue Light Filter**, **Splendid**, **Brightness**, **Contrast**, **Input**, **Color Temp.**, **Volume**, **QuickFit**, **GamePlus**, **Rest Reminder**, **Color Augmentation**, **Energy Saving**.

3.2 Specifications summary


Panel Type	TFT LCD
Panel size	VA249HG3: 23.8” (16:9, 60.45 cm) wide screen VA279HG3: 27” (16:9, 68.5 cm) wide screen
Max. Resolution	1920 x 1080
Pixel pitch	VA249HG3: 0.2745 mm x 0.2745 mm VA279HG3: 0.3114 mm x 0.3114 mm
Brightness (Typ.)	300 cd/m^2
Contrast Ratio (Typ.)	2000:1
Contrast Ratio (Max.)	100,000,000:1 (with ASCR on)
Viewing angle (H/V) CR>10	178˚/178˚
Display colors	16.7 M
Response time	1 ms MPRT
Splendid Video Enhancement	Yes
Splendid selection	8 video preset modes
Auto adjustment	Yes
Color temperature selection	4 color temperatures
Analog input	D-sub
Digital input	HDMI v2.1
Earphone jack	Yes
Audio input	No
Speaker (Built-in)	No
USB 3.2 Gen 1 port	No
Colors	Black
Power LED	White (On)/Amber (Standby)
Tilt	-5°~+23°
Pivot	No
Swivel	No
Height Adjustment	No
Kensington lock	Yes
AC input voltage	AC: 100~240V
Power consumption	VA249HG3: Power On: < 15 W** (Typ.), Standby: < 0.5 W, Power Off: < 0.3 W VA279HG3: Power On: < 20 W** (Typ.), Standby: < 0.5 W, Power Off: < 0.3 W
Temperature (Operating)	0˚C~40˚C
Temperature (Non-operating)	-20˚C~+60˚C

Dimension (W x H x D)	VA249HG3: 541.1 x 413.5 x 188.7 mm (with stand) 541.1 x 321.5 x 49.8 mm (without stand) 608 x 118 x 415 mm (package) VA279HG3: 613.38 x 448.1 x 194.2 mm (with stand) 613.4 x 362.1 x 49.8 mm (without stand) 710 x 120 x 420 mm (package)
Weight (Esti.)	VA249HG3: 2.61 kg (net without stand); 3.1 kg (net with stand); 4.8 kg (gross) VA279HG3: 3.25 kg (net without stand); 3.7 kg (net with stand); 5.8 kg (gross)
Multi-languages	23 languages (English, French, German, Italian, Spanish, Dutch, Portuguese, Russian, Czech, Croatian, Polish, Romanian, Hungarian, Turkish, Simplified Chinese, Traditional Chinese, Japanese, Korean, Thai, Indonesian, Persian, Ukrainian, Vietnamese)
Accessories	Quick start guide, warranty card, power cord, HDMI cable (optional), VGA cable (optional)
Compliance and Standards	cTUVus, FCC, ICES-3, EPEAT Silver, CB, CE, ErP, WEEE, EU Energy label, ISO 9241-307, UkrSEPRO, Ukraine Energy Doc, CU, EAC RoHs, CCC, China Energy Label, BSMI, RCM, MEPS, VCCI, PSE, PC Recycle, J-MOSS, KC, KCC, Energy Star 8.0, TCO 10, RoHs, CEC, TÜV Flicker free, TÜV Low Blue Light, SIOC, Windows 10 & 11 WHQL, PSB, Vietnam Energy, CECP, FSC MIX


***Specifications are subject to change without notice.**
****Measuring a screen brightness of 300 nits without audio/USB/Card reader connection.**

3.3 Outline dimensions

VA249HG3

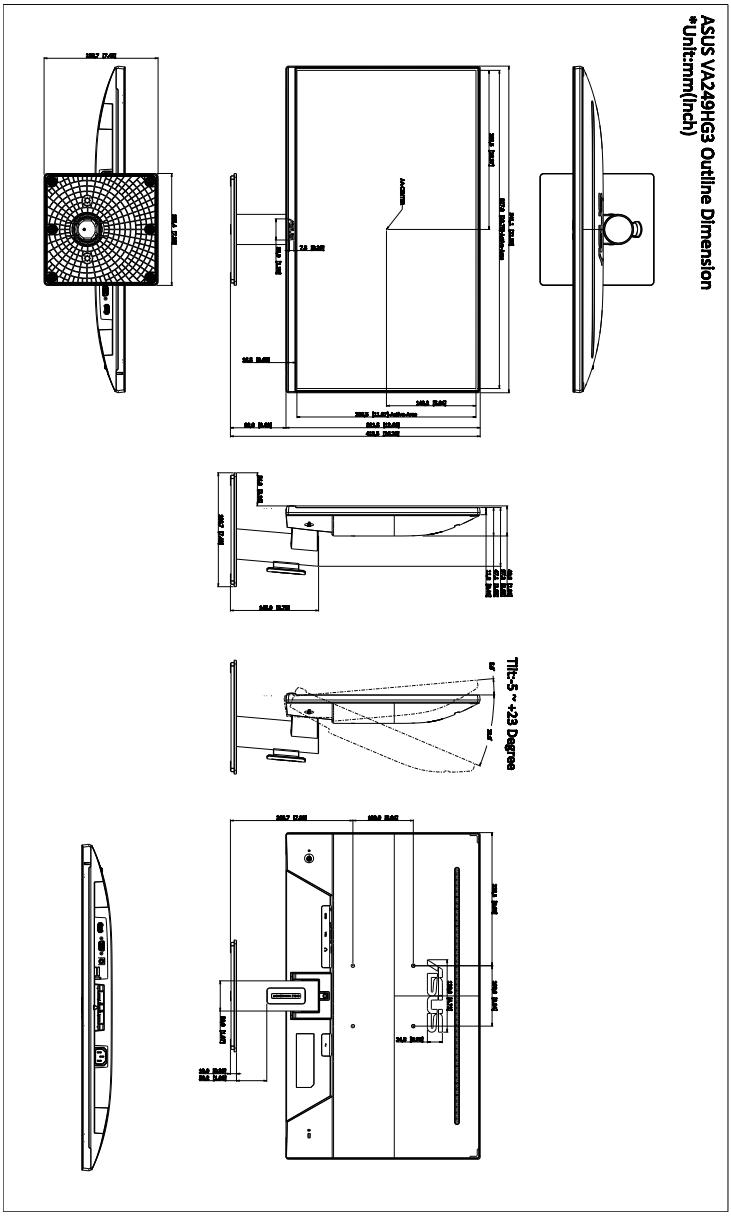

VA279HG3

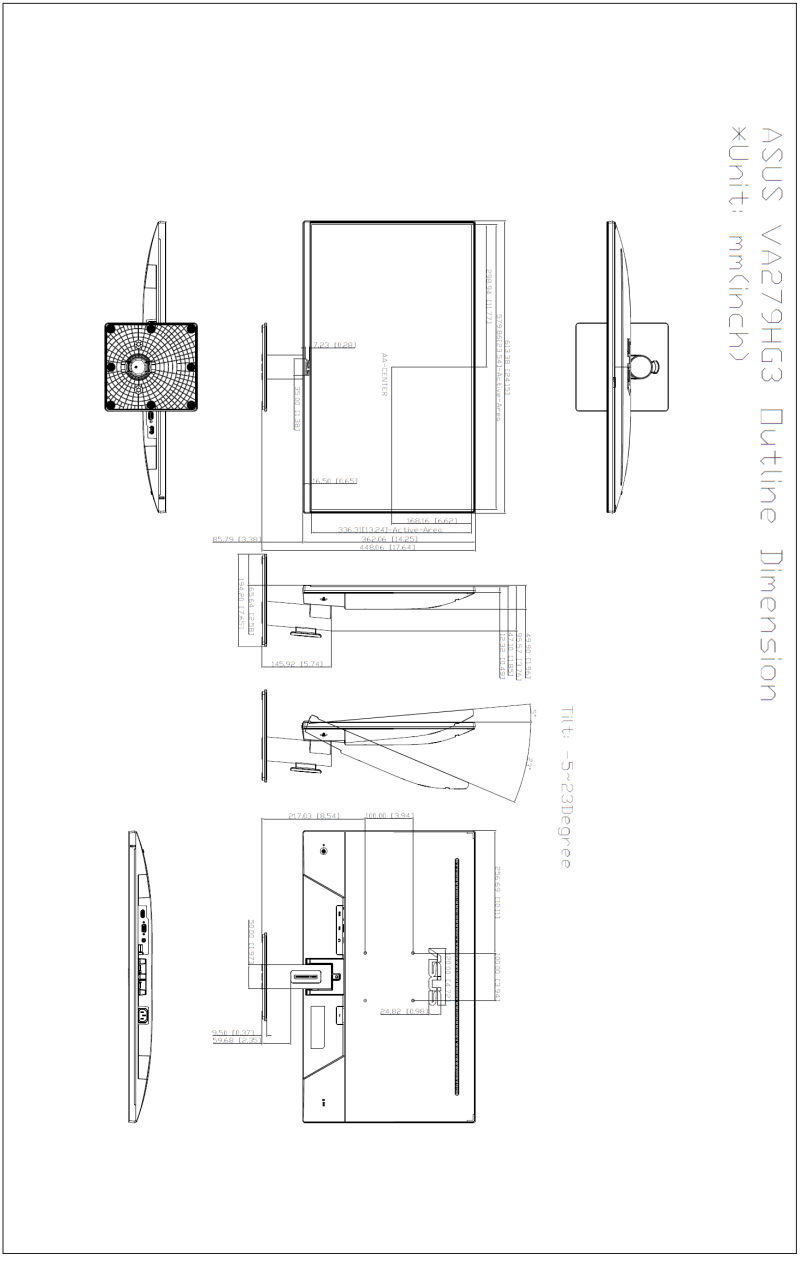
ASUS VA279HG3 Outline Dimension
*Unit: mm(inch)
Tilt: -5~23degree

3.4 Troubleshooting (FAQ)

Problem	Possible Solution
Power LED is not ON	• Press the ⏻ button to check if the monitor is in the ON mode. • Check if the power cord is properly connected to the monitor and the power outlet. • Check if the power switch is ON.
The power LED lights amber and there is no screen image	• Check if the monitor and the computer are in the ON mode. • Make sure the signal cable is properly connected the monitor and the computer. • Inspect the signal cable and make sure none of the pins are bent. • Connect the computer with another available monitor to check if the computer is properly working.
Screen image is too light or dark	• Adjust the Contrast and Brightness settings via OSD.
Screen image is not centered or sized properly	• Adjust the H-Position or V-Position settings via OSD (if available).
Screen image bounces or a wave pattern is present in the image	• Make sure the signal cable is properly connected to the monitor and the computer. • Move electrical devices that may cause electrical interference.
Screen image has color defects (white does not look white)	• Inspect the signal cable and make sure that none of the pins are bent. • Perform All Reset via OSD. • Adjust the R/G/B color settings or select the Color Temperature via OSD.
Screen image is blurry or fuzzy	• Adjust the Phase and Clock settings via OSD (if available).
No sound or sound is low	• Ensure that the signal cable is properly connected to the monitor and the computer. • Adjust the volume settings of both your monitor and signal source. • Ensure that the computer sound card driver is properly installed and activated.

3.5 Supported operating modes

Timing Resolution	Input Source	Pixel Clock (MHz)	Horizontal Frequency (KHz)	Vertical Frequency (Hz)
640 x 480@60Hz	HDMI/VGA	25.175	31.47	59.94
640 x 480@75Hz	HDMI/VGA	31.5	37.5	75
800 x 600@60Hz	HDMI/VGA	40	37.88	60.32
800 x 600@75Hz	HDMI/VGA	49.5	46.88	75
1024 x 768@60Hz	HDMI/VGA	65	48.36	60
1024 x 768@75Hz	HDMI/VGA	78.75	60.02	75.03
1280 x 720@60Hz	HDMI/VGA	74.25	45	60
1280 x 960@60Hz	HDMI/VGA	108	60	60
1280 x 1024@60Hz	HDMI/VGA	108	63.98	60.02
1600 x 900@60Hz	HDMI/VGA	108	60	60
1920 x 1080@60Hz	HDMI/VGA	148.5	67.5	60
1920 x 1080@60Hz	HDMI/VGA	148.5	67.5	60
1920 x 1080@75Hz	HDMI	174.5	83.89	74.97
1920 x 1080@100Hz	HDMI	235.5	113.22	99.93
1920 x 1080@120Hz	HDMI	285.5	137.26	119.98
1920 x 1080@165Hz	HDMI	380.96	183.15	165
1920 x 1080@180Hz	HDMI	415.59	199.8	180

When the monitor is operating in the video mode (i.e., not displaying data), the following high definition modes shall be supported in addition to standard definition video.

Timing	Horizontal Frequency (KHz)	Vertical Frequency (Hz)
1920 x 1080p@120Hz	297	135
1920 x 1080p@100Hz	297	112.5
1920 x 1080p@60Hz	148.5	67.5
1920 x 1080p@50Hz	148.5	56.25
1280 x 720p@60Hz	74.25	45
1280 x 720p@50Hz	74.25	37.5
720 x 576p@50Hz	27	31.25
720 x 576p@50Hz	27	31.25
720 x 480p@60Hz	27	31.47
720 x 480p@60Hz	27	31.47
640 x 480p@60Hz	25.175	31.47