

INSTALLATION INSTRUCTIONS

SSB-080, SSM-080, SLB-080 and SLM-080 Interface Brackets

SSB-080, SSM-080, SLB-080 and SLM-080 Interface Brackets are designed for use with Chief® Series Projector Mounts. See the specific installation instructions provided with the mount for additional installation information.


Unpack carton and verify kit contents. If any listed parts are missing, immediately contact a Chief Customer Service representative.



WARNING: IMPROPER INSTALLATION CAN LEAD TO EQUIPMENT FALLING CAUSING SERIOUS PERSONAL INJURY AND DAMAGE TO EQUIPMENT! DO NOT substitute hardware. Use only hardware supplied by manufacturer!

(1) Interface Bracket
(4) 10-24 Thumb Nuts **
(1) All-Points Security Kit

(4) Screw, Phillips Flat Head Screw, Machine M4 x 16mm****
(4) 1/2" x .218 x 1/4" Nylon Spacers ****

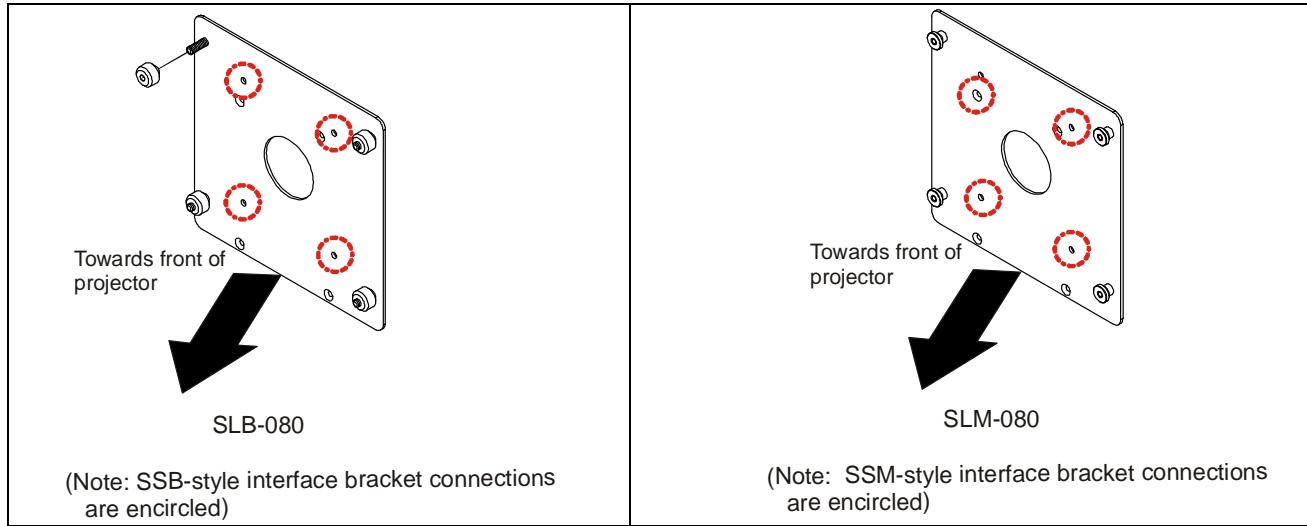

Only used when installing SLB/SSB interface brackets. **Used when mounting surface of projector is recessed.

NOTE: Specific to SSB-style and SSM-style interface bracket installation, all appropriate screws come pre-installed as reflected in the encircled locations above. DO NOT attempt to substitute and USE ONLY this pre-installed hardware for SSB-style and SSM-style interface bracket installation.

Installation Instructions



WARNING: OVER TIGHTENING OF SCREWS CAN DAMAGE PARTS AND CAN LEAD TO SERIOUS PERSONAL INJURY AND DAMAGE TO EQUIPMENT! DO NOT over tighten screws when installing interface brackets.

NOTE: Step 1 is only required when installing an SLB/SSB interface bracket. If an SLM/SSM bracket is being installed, proceed to step 2.

1. Screw thumb screws onto the 10-24 x 5/8" Phillips pan head screws. DO NOT fully tighten thumb screws at this time.
2. Turn projector upside down on a flat surface.
3. Place the 1/4" nylon spacers over the threaded inserts in the bottom of the projector.
4. Place the interface bracket onto the 1/4" nylon spacers on the bottom of the projector and align the mounting holes in the bracket with the nylon spacers.
5. Using the M4 x 16mm flat head screws, secure the bracket to the projector and tighten all fasteners at this time.

NOTE: Security screws can be substituted when mounting interface bracket to projector by using the parts and installation instructions in the All-Points Security Kit.

Chief® is a registered trademark of Milestone AV Technologies. All rights reserved.

