

# INSTALLATION INSTRUCTIONS

## SSB-730, SSM-730, SLB-730 and SLM-730 Interface Brackets

SSB-730, SSM-730, SLB-730 and SLM-730 Interface Brackets are designed for use with Chief® Series Projector Mounts. See the specific installation instructions provided with the mount for additional installation information.


Unpack carton and verify kit contents. If any listed parts are missing, immediately contact a Chief Customer Service representative.



**WARNING: IMPROPER INSTALLATION CAN LEAD TO EQUIPMENT FALLING CAUSING SERIOUS PERSONAL INJURY AND DAMAGE TO EQUIPMENT! DO NOT substitute hardware. Use only hardware supplied by manufacturer!**

- (1) Interface Bracket
- (4) 10 - 24 Thumb Nuts\*\*
- (1) All-Points Security Kit

- (1) Screw, Phillips Flat Head, Machine, M4 x 16mm\*\*\*\*
- (3) Screw, Phillips Pan Head, Machine, M4 x 16mm\*\*\*\*
- (4) 1/2" x .218" x 1/4" Round Spacer\*\*\*\*
- (3) Washer, Flat, M4

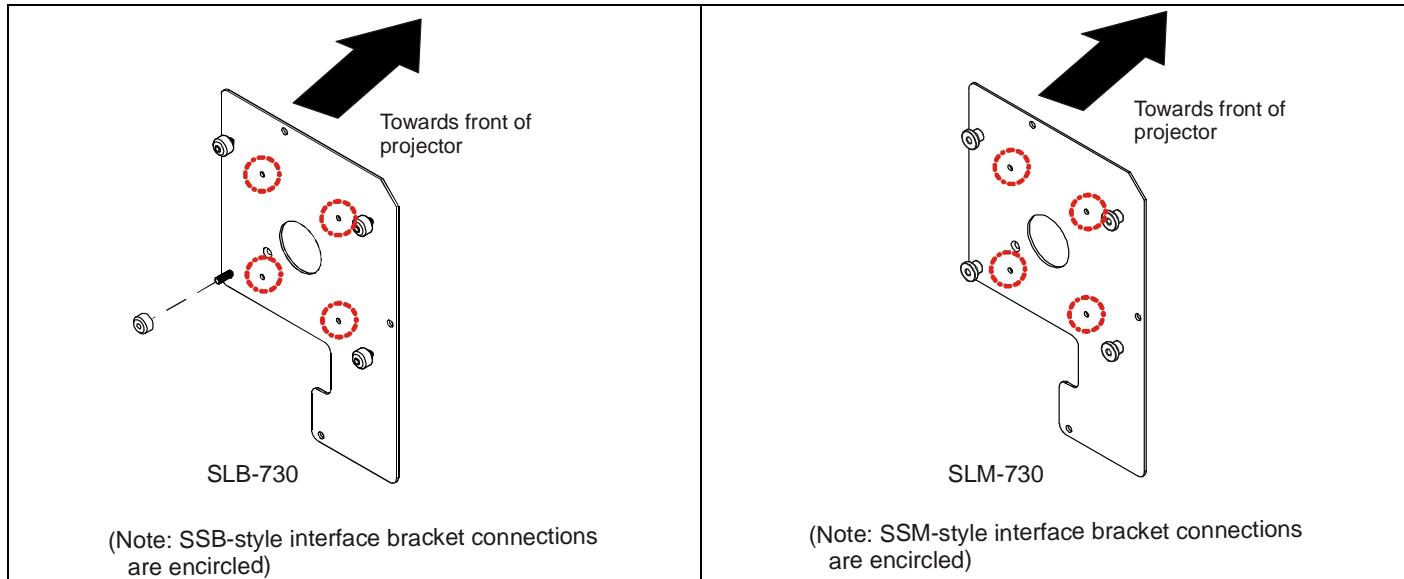

(Note: SSB-style interface bracket connections are encircled)

(Note: SSM-style interface bracket connections are encircled)

\*\*Only used when installing SLB/SSB interface brackets. \*\*\*\*Used when mounting surface of projector is recessed.

**NOTE:** Specific to SSB-style and SSM-style interface bracket installation, all appropriate screws come pre-installed as reflected in the encircled locations above. DO NOT attempt to substitute and USE ONLY this pre-installed hardware for SSB-style and SSM-style interface bracket installation.

### Installation Instructions



**WARNING: OVER TIGHTENING OF SCREWS CAN DAMAGE PARTS AND CAN LEAD TO SERIOUS PERSONAL INJURY AND DAMAGE TO EQUIPMENT! DO NOT over tighten screws when installing interface bracket.**

**NOTE:** Step 1 is only required when installing an SLB/SSB interface bracket. If an SLM/SSM bracket is being installed, proceed to step 2.

1. Screw thumb screws onto 10-24 x 5/8" Phillips pan head screws. DO NOT fully tighten thumb screws at this time.
2. Turn projector upside down on a flat surface.
3. Place 1/4" spacers over threaded inserts in bottom of projector.
4. Place interface bracket onto projector and align mounting holes in bracket with threaded inserts in projector.
5. Using M4 x 16mm Phillips pan head screws with flat washers and M4 x 16m Phillips flat head screw, tighten all fasteners at this time to secure interface bracket to projector.

**NOTE:** Security screws can be substituted when mounting interface bracket to projector by using the parts and installation instructions in the All-Points Security Kit.

Chief® is a registered trademark of Milestone AV Technologies. All rights reserved. Phillips

