

INSTALLATION INSTRUCTIONS

SSB-115, SSM-115, SLB-115 and SLM-115 Interface Brackets

SSB-115, SSM-115, SLB-115 and SLM-115 Interface Brackets are designed for use with Chief® Series Projector Mounts. See the specific installation instructions provided with the mount for additional installation information.


Unpack carton and verify kit contents. If any listed parts are missing, immediately contact a Chief Customer Service representative.




WARNING: IMPROPER INSTALLATION CAN LEAD TO EQUIPMENT FALLING CAUSING SERIOUS PERSONAL INJURY AND DAMAGE TO EQUIPMENT! DO NOT substitute hardware. Use only hardware supplied by manufacturer!

- (1) Interface Bracket
- (6) 10 - 24 Thumb Nuts**
- (1) All-Points Security Kit
- (1) Cradle Bracket

- (4) Rubber Bumpers
- (4) #10 Flat Washers
- (2) M4 Flat Washers
- (4) 10-24 Nylock Nuts
- (2) M4 x 10mm Screws

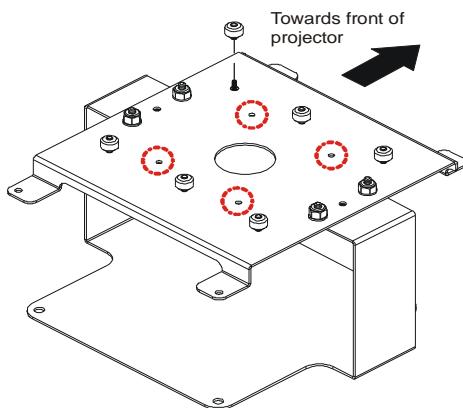

(Note: SSB-style interface bracket connections are encircled)

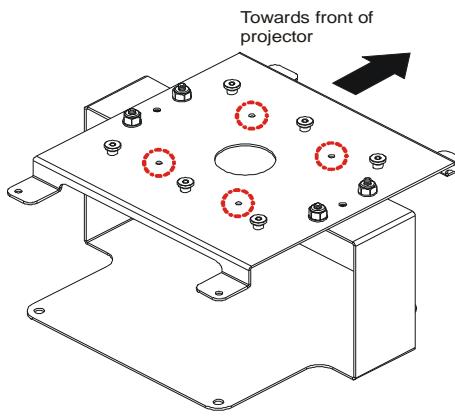

(Note: SSM-style interface bracket connections are encircled)

**Only used when installing SLB/SSB interface brackets.

NOTE: Specific to SSB-style and SSM-style interface bracket installation, all appropriate screws come pre-installed as reflected in the encircled locations above. DO NOT attempt to substitute and USE ONLY this pre-installed hardware for SSB-style and SSM-style interface bracket installation.

Installation Instructions



WARNING: OVER TIGHTENING OF SCREWS CAN DAMAGE PARTS AND CAN LEAD TO SERIOUS PERSONAL INJURY AND DAMAGE TO EQUIPMENT! DO NOT over tighten screws when installing interface bracket.

NOTE: Step 1 is only required when installing an SLB/SSB interface bracket. If an SLM/SSM bracket is being installed, proceed to step 2.

1. Screw thumb screws onto 10-24 x 5/8" Phillips pan head screws. DO NOT fully tighten thumb screws at this time.
2. Install bracket cradle by carefully sliding it from the rear of the projector and along its edges forward until vertical legs move past control panel at side (**NOTE:** stop just before it reaches the forward feet of the projector).
3. Install four rubber bumpers into four inner .28 diameter holes of cradle bracket.
4. Raise two adjustable feet by pushing foot release inward (**NOTE:** this will allow placing of interface bracket on cradle studs).
5. Align four outer .25 diameter holes of interface bracket with four 10-24 x .5" long studs in the cradle. Install four 10-24-Nylock nuts with washers onto studs and tighten moderately. Install the two metric fasteners into the projector bottom. Tighten all fasteners at this time, securing interface bracket to projector.

NOTE: Security screws can be substituted when mounting interface bracket to projector by using the parts and installation instructions in the All-Points Security Kit.

Chief® is a registered trademark of Milestone AV Technologies. All rights reserved.



Milestone AV Technologies, and its affiliated corporations and subsidiaries (collectively, "Milestone"), intend to make this manual accurate and complete. However, Milestone makes no claim that the information contained herein covers all details, conditions or variations, nor does it provide for every possible contingency in connection with the installation or use of this product. The information contained in this document is subject to change without notice or obligation of any kind. Milestone makes no representation of warranty, expressed or implied, regarding the information contained herein. Milestone assumes no responsibility for accuracy, completeness or sufficiency of the information contained in this document.