



MASTER PL-C 4 Pin

MASTER PL-C 13W/840/4P 1CT/5X10BOX

Energy-saving compact fluorescent lamps Compact long-arc low-pressure mercury discharge lamp Envelope consists of 4 parallel narrow fluorescent tubes

Product data

• General Information

Cap base	G24Q-1 [G24q-1]
Life to 50% failures preheat (nom.)	13000 h
LSF Preheat 2000 h Rated	99 %
LSF Preheat 4000 h Rated	98 %
LSF Preheat 6000 h Rated	97 %
LSF Preheat 8000 h Rated	90 %

• Light Technical

Luminous flux (nom.)	925 lm
Luminous flux (rated) (nom.)	925 lm
Colour designation	Cool White (CW)
Chromaticity coordinate X (nom.)	380
Chromaticity coordinate Y (nom.)	380
Correlated colour temperature (nom.)	4100 K
Luminous efficacy (rated) (nom.)	69 lm/W
Color rendering index (nom.)	82
LLMF 2000 h Rated	92 %
LLMF 4000 h Rated	87 %
LLMF 6000 h Rated	83 %
LLMF 8000 h Rated	81 %

• Operating and Electrical

Power (Rated) (Nom)	13.0 W
Lamp current (nom.)	0.170 A

• Temperature

Design temperature (nom.)	28 °C
---------------------------	-------

• Controls and Dimming

Dimmable	yes
----------	-----

• Mechanical and Housing

Cap base information	4P
----------------------	----

• Approval and Application

Energy efficiency label (EEL)	A
Mercury (Hg) content (nom.)	1.4 mg
Energy Consumption kWh/1000 h	15 kWh

• Product Data

Full product code	871150062332470
Order product name	MASTER PL-C 13W/840/4P 1CT/5X10BOX
EAN/UPC – product	8711500623324
Order code	62332470
Local Code	13PLC8404PIN
Numerator – quantity per pack	1

PHILIPS

MASTER PL-C 4 Pin

Numerator – packs 50
 per outer box
 Material no. (12NC) 927907184040


Net weight (piece) 49.900 g
 ILCOS Code FSQ-13/40/1B-E-G24q=1

Warnings and Safety

- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position as well as applied HF control gear
- Shorter lamp life when often switching and not well pre-heated electrodes

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


Dimensional drawing

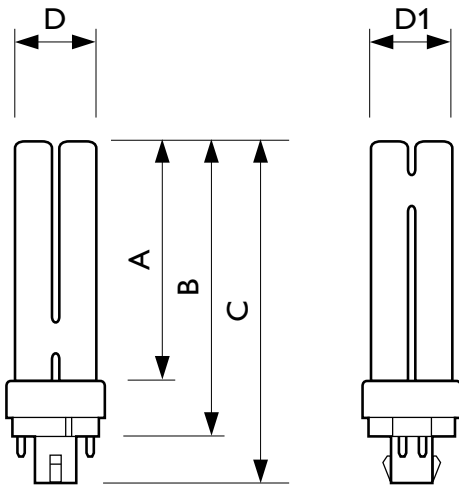


PL-C 13W/840/4P

Product	D	D1	A	B	C
MASTER PL-C 13W/840/4P 1CT/5X10BOX	97.5 mm	117.0 mm	131.9 mm		

G24q-1/G24q-2/G24q-3, 4P



Photometric data

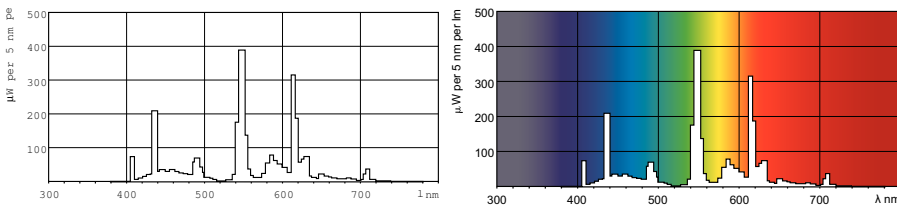



© 2016 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2016, October 10
data subject to change