

5TH Generation

Orchestrating a brighter world

NEC

High-performance, LED-backlit LCD
displays ideal for corporate environments

NEC MultiSync® EA Series

Business Desktops 27" | 30"
UHD Desktops 27"



Reimagine your desktop computing experience.



With its 5th generation MultiSync EA Series, NEC has developed monitor solutions that push the boundaries of what you've come to know as business-class screen performance. The EA Series deliver a host of enhanced features, advanced technologies, future-proof connectivity and environmentally friendly benefits. All models utilize IPS LCD panels, which boast the best possible color accuracy and minimal viewing angle shift.

EA Series Desktops	
27"	EA275UHD
27"	EA275WMi
30"	EA305WMi



Highlights

- LED backlight technology provides for industry-leading low power consumption and less hazardous materials
- Touch-sensitive OSD® controls are integrated into the bezel, making display adjustments easier than ever
- Integrated USB 3.0 hub easily connects you to your peripherals
- ENERGY STAR® compliance reduces electrical costs and lowers total cost of ownership

MultiSync EA Series Features

Multiple Monitor Technologies

The ground breaking ControlSync™ technology allows users to control up to six select MultiSync EA Series units in a multi-monitor configuration. Upon establishing one unit as the master, you will be able to simultaneously control many performance attributes of the multi-monitor setup through the master monitor. ControlSync enables multi-monitor setups of up to six monitors and controls up to 26 settings.

Comprehensive Input Panel

DisplayPort, HDMI, DVI-D and 15-pin VGA *select models, as well as USB 3.0 hubs connect you to the latest peripherals and future-proofs your investment.



Adjustable for Every Workspace

Four-way ergonomic stand boasts pivot, tilt, swivel and height adjustment up to 130mm to maximize your viewing comfort. In addition, Space-saving multimedia speakers are hidden to maintain the monitor's aesthetic appeal (headphone jack also included).



Smart Sensing Technologies

Smart sensing technology includes ambient light and human sensors, which considerably reduce power consumption by automatically detecting your work conditions and adjusting to the proper display brightness or entering Power Saving Mode.



Power-saving Features


Include ECO Mode™, a carbon footprint meter and an ambient light sensor, which automatically adjusts the brightness to the optimal setting depending on ambient lighting, screen content or both, conserving power up to 87% compared to typical energy consumption. In addition, the human sensor detects user activity in front of the monitor and reduces display power up to 95% with inactivity.



IT-Friendly Features

Customize Setting allows both users and IT administrators to set and restore preferred settings with just one touch, contributing to a free-seating business environment.

The optional NaViSet™ Administrator 2.0 software offers an intuitive graphical interface, allowing for easy adjustment of display settings via mouse and keyboard. NaViSet Administrator provides all the advanced control to remotely located IT professionals.

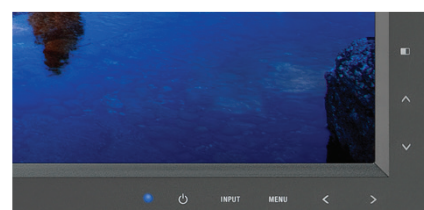

MODEL			EA275Wmi	EA305Wmi	EA275UHD	
Display	Panel Technology		AH-IPS	AH-IPS	AH-IPS	
	Backlight Type		W-LED	GB-R LED	LED	
	Viewable Image Size		27"	29.8"	27"	
	Aspect Ratio		16:9	16:10	16:9	
	Native Resolution		2560 x 1440	2560 x 1600	3840 x 2160	
	Pixel Pitch		0.23mm	0.25mm	0.16mm	
	Pixels Per Inch (at native resolution)		109 @ native resolution	101 @ native resolution	163 @ native resolution	
	Brightness (typical)		350 cd/m²	350 cd/m²	350 cd/m²	
	Contrast Ratio (typical)		1000:1			
	Color Gamut*					
	Adobe RGB Coverage/Size**		80.4% / 85.8%	99.3% / 108.6%	78.1% / 81.6%	
	NTSC Coverage/Size		77.3% / 82.0%	94.8% / 103.7%	75.1% / 78.0%	
	sRGB Coverage/Size		100% / 115.7%	100% / 146.4%	100% / 110.1%	
	Viewing Angle (typical)		178° Vert., 178° Hor. (89U/89D/89L/89R) @ CR>10			
	Response Time (typical)		6ms			
	Displayable Colors		16.8 million			
	Synchronization Range		31.5 KHz - 83.0 KHz / 31.5 KHz - 91.0 KHz			
	Horizontal (Analog/Digital)		31.5-83 kHz	31.5-98.7kHz	31.5-135 kHz	
	Vertical		56-75 Hz	56.0 Hz - 75.0 Hz	30-75 Hz	
Input Signal		Video	Analog RGB 0.7 Vp-p/75 Ohms			
		Sync	Composite sync: TTL Level (Positive/Neg tive) Composite sync on green: (0.3Vp-p negative 0.7Vp-p positive)			
Input Connectors		DVI-I, DisplayPort 1.2, HDMI 2.0		DVI-D, HDMI, DisplayPort		
Output Connectors		DisplayPort 1.2 out		N/A		
POWER CONSUMPTION		On (typical)	57W	86W	71W	
		Power Savings Mode (typical)	0.8W	0.47W	0.5W	
PHYSICAL SPECIFICATIONS		Dimensions (WxHxD)	Net Weight (with stand)	25.2 x 16.5 - 21.6 x 9.1 in. / 639.2 x 417.9 - 537.9 x 230 mm	27.0 x 18.6 - 23.7 x 9.1 in. / 686.9 x 472.8 - 602.8 x 230.0 mm	25.2 x 16.5 - 21.6 x 9.1 in. / 639.2 x 417.9 - 537.9 x 230 mm
			Net Weight (without stand)	25.2 x 14.9 x 2.6 in. / 639.3 x 377.8 x 66.5 mm	27.0 x 17.6 x 3.0 in. / 800.0 x 613.0 x 280.0 mm	25.2 x 14.9 x 2.6 in. / 639.2 x 377.8 x 66.5 mm
		Net Weight (with stand)		19.2 lbs / 8.7 kg	24.0 lbs. / 10.9 kg	20.1 lbs / 9.1 kg
		Net Weight (without stand)		12.8 lbs. / 5.8 kg	17.2 lbs. / 7.8 kg	13.7 lbs. / 6.2 kg
		VESA Hole Configuration		100 x 100 mm		
ENVIRONMENTAL CONDITIONS		Operating Temperature		41-95°F / 5-35°C		
		Operating Humidity		20-80%		
		Operating Altitude		16,404 ft. / 5000m	6562 ft. / 2000m	
		Storage Temperature		14-140°F / -10-60°C		
		Storage Humidity		10-85%		
		Storage Altitude		40,000 ft. / 12,192m		
ENVIRONMENTAL COMPLIANCE		ENERGY STAR		6.0		
		TCO		Certified 6.0 / Edge Certified 1.2		Edge Certified 1.2
		EPEAT		Gold		
		RoHS		Yes		
LIMITED WARRANTY			3 years parts and labor, including backlight, Warranty restrictions apply			
ADDITIONAL FEATURES			Tilt; Swivel; Pivot; Height-adjustable stand; ControlSync; Customize Setting; Integrated speakers; 4-port USB hub; LED backlight; Auto brightness with ambient light sensor; Human sensor; ECO Mode; Carbon footprint meter; Resettable cost meter; Thin frame; Carrying handle; Rapid Response; Ambix; XtraView; Hot Key; Touch OSD controls; OSD Lock Out; Cable management; Dynamic Visual Mode (Standard, Text, Movie, Gaming, Photo, Dynamic); NaViSet Administrator 2; VESA mount; HDCP; DDC/CI; No Touch Auto Adjust; Plug and Play (VESA DDC2B); VESA DPMS power management; AccuColor color control; Digital smoothing; Digital controls; ISO 9241-307 Class I; DICOM SIM for IPS models			
SHIPS WITH			Setup sheet; User manual; Power cord; DisplayPort cable; DVI-D cable; USB cable; Audio cable; ControlSync cable			



MultiSync is a registered trademarks and ECO Mode and ControlSync are Trademarks of NEC Display Solutions. All other brand or product names are trademarks or registered trademarks of their respective holders. Product specifications subject to change.

©2015 NEC Display Solutions of America, Inc. and the NEC logo are registered trademarks of NEC.