


Components	Specification	Components	Specification																																																		
Chipset	Intel C236 Chipset		Supports the following optional ports:																																																		
Intel AMT	Intel Active Management Technology 11 supported on Xeon models		• Two IEEE 1394 (one on rear and one on front flex module) via PCIe adapter, up to one adapter per system.																																																		
	One LGA1151 socket, supports one of the following processors:		Supports one of the following per system:																																																		
	Xeon E3-1280 v5 4C/3.7GHz/8MB/80W/DDR4-2133		• Two rear USB 3.0 per PCIe adapter.																																																		
	Xeon E3-1275 v5 4C/3.6GHz/8MB/80W/DDR4-2133		• One rear Thunderbolt via PCIe adapter.																																																		
	Xeon E3-1270 v5 4C/3.6GHz/8MB/80W/DDR4-2133		• One front eSATA (on flex module), or one rear eSATA via cable and PCIe slot bracket, up to one eSATA port per system.																																																		
	Xeon E3-1245 v5 4C/3.5GHz/8MB/80W/DDR4-2133		• One additional serial port via cable.																																																		
	Xeon E3-1240 v5 4C/3.5GHz/8MB/80W/DDR4-2133		• One parallel port via cable																																																		
	Xeon E3-1230 v5 4C/3.4GHz/8MB/80W/DDR4-2133																																																				
	Xeon E3-1225 v5 4C/3.3GHz/8MB/80W/DDR4-2133																																																				
	Xeon E3-1220 v5 4C/3GHz/8MB/80W/DDR4-2133																																																				
	Core i7-6700 4C/3.4GHz/8MB/65W/DDR4-2133		• Raven black color; metal case																																																		
	Core i5-6600 4C/3.3GHz/6MB/65W/DDR4-2133		• 6.89" W x 16.77" D x 14.8" H																																																		
	Core i5-6500 4C/3.2GHz/6MB/65W/DDR4-2133		• 175mm W x 426mm D x 376mm H																																																		
	Core i5-6400 4C/2.7GHz/6MB/65W/DDR4-2133		• 28.66 lb (13kg) max configuration																																																		
	Core i3-6320 2C/3.9GHz/4MB/51W/DDR4-2133		• 25-liter																																																		
	Core i3-6300 2C/3.8GHz/4MB/51W/DDR4-2133																																																				
	Core i3-6100 2C/3.7GHz/3MB/51W/DDR4-2133																																																				
Memory DIMM slots	4 DIMM slots, 2-channel (integrated memory controller in processor)	Environmental certifications	GREENGUARD certified/RoHS-compliant/EPEAT Gold rating/ENERGY STAR 6.1 qualified																																																		
Memory type/capacity	Up to 64GB ECC/non-ECC (4 x 16GB), DDR4-2133, UDIMM	Limited warranty	3-year limited onsite service with 9x5/NBD. Some parts are Customer Replaceable Units.																																																		
Intel HD Graphics in processor	Integrated Intel HD P530 in Xeon E3-12x5 v5 processors; or Intel HD 530 in Core i7, i5, or i3 processors. Works along with discrete graphics to support multi-display, enables three display connectors (2 DP, 1 VGA) on rear. Max resolution: 4096 x 2304																																																				
Discrete graphics	<p>Two PCI Express 3.0 x16 slots for graphics adapters. Up to two Quadro K1200 on 250 watts models. Or up to two Quadro K2200, or up to one Quadro M4000 on 400 watts models. Supports the following NVIDIA graphics adapters:</p> <table border="1"> <thead> <tr> <th>Adapter</th> <th>Cores</th> <th>Memory</th> <th>Power</th> <th>Connector</th> </tr> </thead> <tbody> <tr> <td>NVS 310</td> <td>48</td> <td>1GB</td> <td>19.5W</td> <td>2xDP</td> </tr> <tr> <td>NVS 315</td> <td>48</td> <td>1GB</td> <td>19.5W</td> <td>2xDVI-I SL/2xDP</td> </tr> <tr> <td>NVS 510</td> <td>192</td> <td>2GB</td> <td>33.4W</td> <td>4xmini DP</td> </tr> <tr> <td>Quadro K420</td> <td>192</td> <td>2GB</td> <td>41W</td> <td>1xDVI-I DL+1xDP</td> </tr> <tr> <td>Quadro K620</td> <td>384</td> <td>2GB</td> <td>45W</td> <td>1xDVI-I DL+1xDP</td> </tr> <tr> <td>Quadro K1200</td> <td>512</td> <td>4GB</td> <td>45W</td> <td>4xminiDP</td> </tr> <tr> <td>Quadro K2200</td> <td>640</td> <td>4GB</td> <td>68W</td> <td>1xDVI-I DL+2xDP</td> </tr> <tr> <td>Quadro M2000</td> <td>768</td> <td>4GB</td> <td>75W</td> <td>4xDP</td> </tr> <tr> <td>Quadro M4000</td> <td>1664</td> <td>8GB</td> <td>120W</td> <td>4xDP</td> </tr> </tbody> </table>	Adapter	Cores	Memory	Power	Connector	NVS 310	48	1GB	19.5W	2xDP	NVS 315	48	1GB	19.5W	2xDVI-I SL/2xDP	NVS 510	192	2GB	33.4W	4xmini DP	Quadro K420	192	2GB	41W	1xDVI-I DL+1xDP	Quadro K620	384	2GB	45W	1xDVI-I DL+1xDP	Quadro K1200	512	4GB	45W	4xminiDP	Quadro K2200	640	4GB	68W	1xDVI-I DL+2xDP	Quadro M2000	768	4GB	75W	4xDP	Quadro M4000	1664	8GB	120W	4xDP		
Adapter	Cores	Memory	Power	Connector																																																	
NVS 310	48	1GB	19.5W	2xDP																																																	
NVS 315	48	1GB	19.5W	2xDVI-I SL/2xDP																																																	
NVS 510	192	2GB	33.4W	4xmini DP																																																	
Quadro K420	192	2GB	41W	1xDVI-I DL+1xDP																																																	
Quadro K620	384	2GB	45W	1xDVI-I DL+1xDP																																																	
Quadro K1200	512	4GB	45W	4xminiDP																																																	
Quadro K2200	640	4GB	68W	1xDVI-I DL+2xDP																																																	
Quadro M2000	768	4GB	75W	4xDP																																																	
Quadro M4000	1664	8GB	120W	4xDP																																																	
Onboard drive controller	Five onboard SATA 6.0Gb/s connectors for optical and disk drives plus one SATA connector for optional eSATA. RAID 0, 1, 5, 10 support																																																				
Drive Bays	<p>Two external 5.25" bays, two internal 3.5" bays (see right). Up to one 9.5mm optical plus 4 x 3.5" disk drive bays plus one M.2 NVMe SSD</p>																																																				
Supporting disk drives	<table border="1"> <tbody> <tr> <td>3.5" SATA HDD (7.2K 6Gbs)</td> <td>500GB/1TB/2TB/3TB/4TB/6TB/1TB hybrid/2TB hybrid</td> </tr> <tr> <td>2.5" SATA SSD (6Gbs)</td> <td>128GB/180GB*/240GB*/256GB*/480GB*/512GB*/1TB*</td> </tr> <tr> <td>M.2 NVMe SSD</td> <td>256GB*/512GB*/1TB*, via PCIe 3.0 x4 adapter</td> </tr> </tbody> </table> <p>** Includes OPAL options</p>	3.5" SATA HDD (7.2K 6Gbs)	500GB/1TB/2TB/3TB/4TB/6TB/1TB hybrid/2TB hybrid	2.5" SATA SSD (6Gbs)	128GB/180GB*/240GB*/256GB*/480GB*/512GB*/1TB*	M.2 NVMe SSD	256GB*/512GB*/1TB*, via PCIe 3.0 x4 adapter																																														
3.5" SATA HDD (7.2K 6Gbs)	500GB/1TB/2TB/3TB/4TB/6TB/1TB hybrid/2TB hybrid																																																				
2.5" SATA SSD (6Gbs)	128GB/180GB*/240GB*/256GB*/480GB*/512GB*/1TB*																																																				
M.2 NVMe SSD	256GB*/512GB*/1TB*, via PCIe 3.0 x4 adapter																																																				
Max internal storage	16TB (4 x 4TB 3.5" HDDs) plus 512GB M.2 NVMe SSD																																																				
Media reader	9-in-1 card reader. Optional 29-in-1 card reader on selected models																																																				
Power supply	Supports one of the following: • 250 watts with variable speed fan, autosensing, 85% PSU, Climate Savers Computing Bronze, 80 PLUS Bronze qualified • 400 watts with variable speed fan, autosensing, 92% PSU, Climate Savers Computing Platinum, 80 PLUS Platinum qualified																																																				
Onboard Ethernet	One onboard gigabit ethernet, Intel I219LM, supports Wake-on-LAN																																																				
HD Audio	Realtek ALC662 codec																																																				
TPM	Standard, TCG 1.2-compliant																																																				
Front ports	Two USB 3.0, microphone (3.5mm), headphone (3.5mm)																																																				
Rear ports	1 VGA and 2 DisplayPort (for Intel HD Graphics models only), two USB 2.0, four USB 3.0 (blue), one serial (9-pin), one ethernet (RJ-45), three analog audio ports (line-in, line-out, mic-in)																																																				

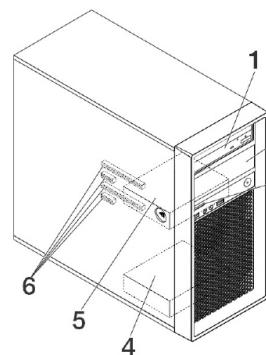

Drive Bays and PCIe Slots

5.25", support one of the following:	
Bay 1 and Bay 2	HH optical/flex module**/9.5mm optical+3.5" HDD bay/3.5" HDD bay/Front Access Storage Enclosure ** Flex module supports one or more of the following: 9.5mm optical/29-in-1 reader/front IEEE 1394/front eSATA. Up to one flex module is supported per system.
Bay 3	Optional 9-in-1 single slot reader
Bay 4	Standard 3.5" HDD bay
Bay 5	Standard 3.5" HDD bay
	Four PCIe slots (top-down):
6 -Slots	Slot 1: Half length, full height, PCIe 3.0 x16 (near CPU) Slot 2: Half length, full height, PCIe 3.0 x1 Slot 3: Half length, full height, PCIe 3.0 x16 (x4 elec) Slot 4: Half length, full height, PCIe 3.0 x1

For the list of ISV certifications, please visit www.thinkworkstations.com/isv-certifications/
For a list of all supported options, please visit https://download.lenovo.com/pccbbs/options_iso/ocm_december_2016.xlsx sheet

Model		30AT002K--
Product		ThinkStation P310 Tower
Region		WE
Machine Type		30AT
TopSeller		TopSeller
Processor		Core i5-6500 4C/3.2GHz/6MB/65W/DDR4-2133
Graphics		Intel HD 530
Memory (Capacity/Type)		1x8GB UDIMM DDR4-2133 Non-ECC
Storage (Capacity/Type/Interface)		1x256GB SSD 2.5" SATA6Gbs Opal
Optical		HH DVD±RW
Media Reader		9-in-1
Power Supply		250W 85%
Add-on Ports		None
Discrete Ethernet		None
Chassis Intrusion Switch		Switch
Keyboard / Mouse		USB / USB Optical
Operating System		Windows 10 DG Windows 7 Pro 64
Warranty		3-year
Global		No
Ann Date (mm/yy)		11/15

