


### Overview

### HP 280 G2 Small Form Factor Business PC

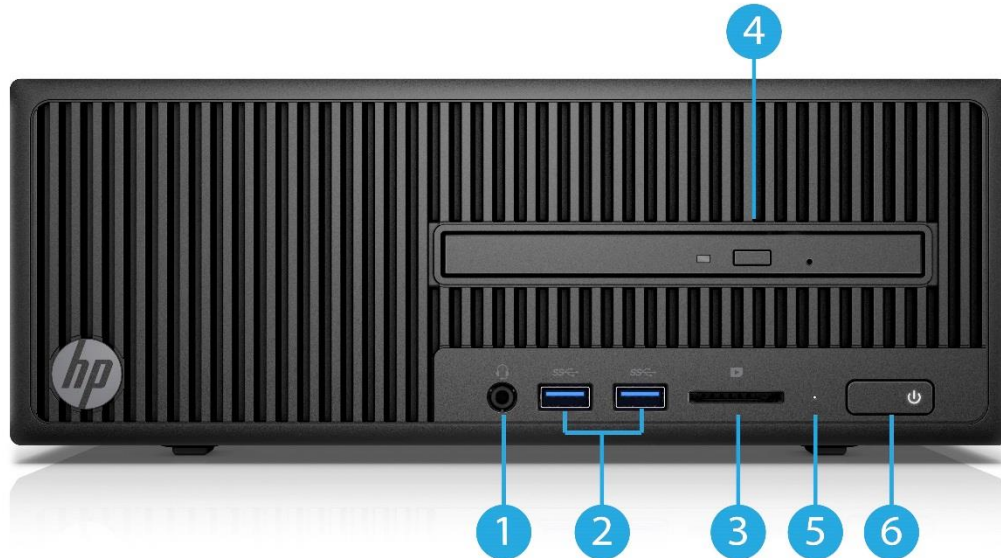

#### **Front**

1. Microphone/Headphone Combo Jack
2. (2) USB 3.0 Ports
3. 3-in1 SD Media Card Reader
4. Slim-height Bay - supporting an optical disk drive (optional)
5. PC Status LED
6. Power Button


#### **Not Shown**

- Slots (1) PCI Express x16 Graphics Connector  
(1) PCI Express x1 Accessory Connector

- Bays (1) 3.5" internal storage drive bay

### Overview

### HP 280 G2 Small Form Factor Business PC

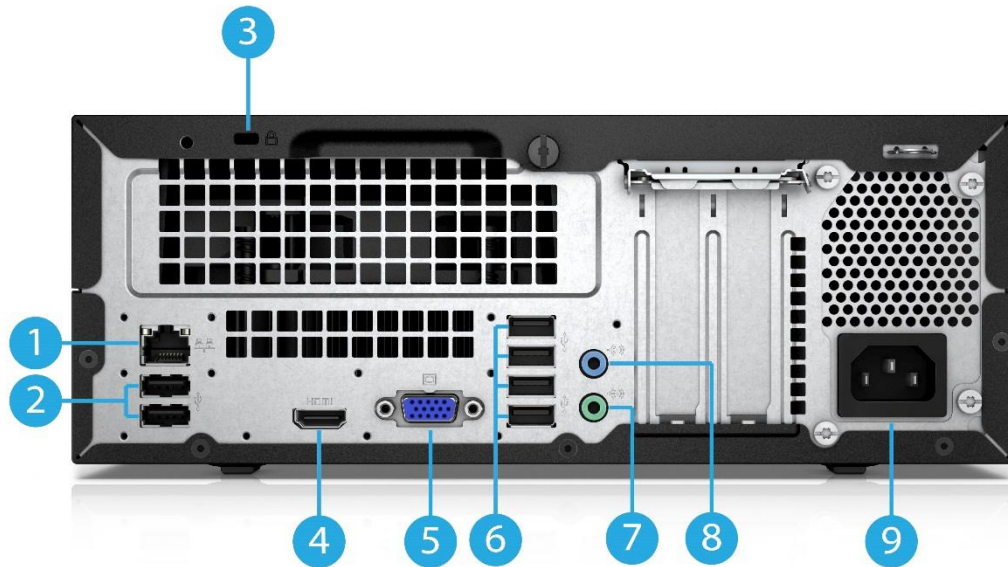

#### **Back**

1. RJ-45 Network Connector
2. (2) USB 2.0 Ports
3. Security Lock Slot
4. HDMI Port
5. VGA Port
6. (4) USB 2.0 Ports
7. Audio Line Out
8. Audio Line In
9. Power Cord Connector

### Overview

#### AT A GLANCE

- Windows 10 Pro , Windows 10 Home, NeoKylin Linux (select countries only) or FreeDOS 2.0 operating systems
- Intel® H110 chipset supporting Intel® 6th generation Intel® Celeron®, Pentium®, Core™ i3 and i5 processors featuring Intel® HD Graphics
- Supports an optional discrete graphics card
- Integrated 10/100/1000 Ethernet Controller
- Supports Wake-on-LAN (WOL)
- Up to 32GB DDR4 Unbuffered Memory (UDIMM)
- Supports both Hard Disk and Solid State Drives
- Independent monitor support via VGA video interfaces
- TPM 2.0 support (firmware)
- High definition audio
- 8 USB ports (including 2-USB 3.0 ports)
- 3-in1 SD Media Card Reader
- 180W energy efficient internal power supply
- Security cable lock supported (sold separately)
- Protected by HP Services; terms and conditions vary by country; certain restrictions and exclusions apply

**NOTE:** See important legal disclosures for all listed specs in their respective features sections.

### Standard Features and Configurable Modules

#### OPERATING SYSTEMS

**Preinstalled (Windows)**

Windows 10 Pro 64\*  
Windows 10 Home 64\*

**Pre-installed (Other)**

FreeDOS 2.0  
NeoKylin Linux 64-bit Commercial OS (select countries only)

**Web-supported**

Windows 10 Pro 64  
Windows 10 Home 64

\*Not all features are available in all editions or versions of Windows. Systems may require upgraded and/or separately purchased hardware, drivers, software or BIOS update to take full advantage of Windows functionality. Windows 10 is automatically updated, which is always enabled. ISP fees may apply and additional requirements may apply over time for updates. See <http://www.microsoft.com>.

Your product does not support Windows 8 or Windows 7. In accordance with Microsoft's support policy, HP does not support the Windows® 8 or Windows 7 operating system on this product or provide any Windows® 8 or Windows 7 drivers on <http://www.support.hp.com>.

#### CHIPSET

Intel® H110 Chipset

#### PROCESSOR\*

**Intel® Celeron®**

Intel® Celeron® G3900 with Intel® HD Graphics 510 (2.8 GHz, 2 MB cache, 2 cores)

**Intel® Pentium®**

Intel® Pentium® G4400 with Intel® HD Graphics 510 (3.3 GHz, 3 MB cache, 2 cores)

**Intel® Core™ i3**

Intel® Core™ i3-6100 with Intel® HD Graphics 530 (3.7 GHz, 3 MB cache, 2 cores)

|

**Intel® Core™ i5**

Intel® Core™ i5-6500 with Intel® HD Graphics 530 (3.2 GHz, 6 MB cache, 4 cores)

\*Multicore is designed to improve performance of certain software products. Not all customers or software applications will necessarily benefit from use of this technology. Performance and clock frequency will vary depending on application workload and your hardware and software configurations. Intel's numbering is not a measurement of higher performance.

### Standard Features and Configurable Modules

#### MEMORY\*

Both slots are customer accessible / upgradeable, Supports Dual Channel Memory

Form Factor	Type	Maximum	# of Slots
Small Form Factor	DDR4-2133 (Transfer rates up to 2133 MT/s)	32 GB capacity	2 DIMM

2GB DDR4-2133 DIMM (1x2GB)

4GB DDR4-2133 DIMM (1x4GB)

8GB DDR4-2133 DIMM (1x8GB)

8GB DDR4-2133 DIMM (2x4GB) (Dual Channel)

\*NOTE: For systems configured with more than 3 GB of memory and a 32-bit operating system, all memory may not be available due to system resource requirements. Addressing memory above 4 GB requires a 64-bit operating system. Memory modules support data transfer rates up to 2133 MT/s; actual data rate is determined by the system's configured processor. See processor specifications for supported memory data rate.

#### STORAGE\*

##### SATA 3.5" 6Gb/s HDDs\*

500GB 7200 RPM SATA Hard Disk Drive

1TB 7200 RPM SATA Hard Disk Drive

##### Solid State Drives 2.5" \*

128GB SATA Value SSD

##### SD Card Reader\*\*

3-in1 SD Media Card Reader

\*NOTE: For hard drives and solid state drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36 GB (for Windows 10) of system disk is reserved for the system recovery software.

\*\*Card sold separately

#### OPTICAL DISC DRIVES\*

HP 9.5mm Desktop G2 Slim DVD-ROM Drive

HP 9.5mm Desktop G2 Slim SuperMulti DVD Writer Drive

\*Optical drives are optional or add on features. Duplication of copyrighted material is strictly prohibited. Actual speeds may vary. Double Layer media compatibility will widely vary with some home DVD players and DVD-ROM drives. Note that DVD-RAM cannot read or write to 2.6GB Single Sided/5.2 Double Sided-Version 1.0 Media.

#### GRAPHICS

##### Integrated

Intel® Integrated HD Graphics Varies by Processor

**Discrete** (optional for selected countries only)

NVIDIA® GeForce® GT 730 2GB PCIe x8

### Standard Features and Configurable Modules

#### AUDIO/MULTIMEDIA

HD audio with Realtek ALC3252 Audio Codec  
Combo Microphone/Headphone Jack  
Line-out and Line-in rear port (3.5mm)

#### NETWORKING

##### Ethernet (RJ-45)

Integrated 10/100/1000M Gigabit Ethernet Controller with Realtek RTL8111HSH –CG

- Supports Wake-on-LAN (WOL)

##### Wireless\*

Intel® 3168 802.11 ac with PCIe x1 WLAN/ Bluetooth® Combo\*®  
Intel® 3168 802.11 ac with PCIe x1 WLAN/ Bluetooth® Combo\*® Disabled

\* Wireless cards are optional or add-on features and requires separately purchased wireless access point and internet service. Availability of public wireless access points limited.

#### PORTS

##### Front I/O Ports

Two (2) USB 3.0 ports  
One (1) Microphone/Headphone Combo Jack

##### Rear I/O Ports

Six (6) USB 2.0 ports  
One (1) RJ45 network connection  
One (1) Audio Line out  
One (1) Audio Line in  
One (1) VGA  
One (1) HDMI

##### Internal I/O Ports

One (1) PCIe x 16 (3.0)  
One (1) PCIe x 1 (2.0)

#### BAYS

One (1) 1st 3.5" Hard Disc Drive Bay  
One (1) 9.5mm Slim ODD Bay  
One (1) Secure Digital (SD) Reader Bay

#### KEYBOARDS AND POINTING DEVICES\*

##### Keyboards

Business Slim USB Antimicrobial Standalone Wired Keyboard  
HP USB Business Slim Keyboard

##### Mice

### Standard Features and Configurable Modules

HP USB Mouse (China only)  
HP USB Mouse

\*Keyboards and mouse are optional or add-on features.

### SOFTWARE COMPONENTS AND APPLICATIONS WITH WINDOWS

Preinstalled (varies by country)

#### BIOS

Power On Authentication

#### Multimedia

Cyberlink Power Media Player  
Cyberlink Power2Go (Secure Burn)

#### HP Value Add Software

HP ePrint Driver<sup>1</sup>  
HP Recovery Manager  
HP Support Assistant  
Windows 10 Welcome App

#### 3rd Party

Foxit PhantomPDF Express for HP (optional, US only)

#### Microsoft Products

Buy Office  
Bing Search  
Skype

#### Manageability

HP BIOS Config Utility (BCU)<sup>2</sup>  
Discover HP Touchpoint Manager<sup>3</sup>

### SECURITY FEATURES

Trusted Platform Module (TPM) 2.0 (firmware)  
Security cable slot

1. Requires an Internet connection to HP web-enabled printer and HP ePrint account registration (for a list of eligible printers, supported documents and image types and other HP ePrint details, see <http://www.hp.com/go/businessmobileprinting>).
2. Not preinstalled, however available for download at <http://www.hp.com/go/clientmanagement>.
3. Subscription required.

### POWER SUPPLY\*

- 180 W, up to 85% efficient

\*Note: All power supplies are not available in every region.

### DIMENSIONS AND WEIGHT (configured with 1 HDD and 1 ODD)



### Standard Features and Configurable Modules

<b>Chassis (D x W x H)</b>	11.42 x 10.63 x 3.94 in 290 x 270 x 100 mm
<b>System Weight</b>	8.88 lbs / 4.03 kg (for 3.5" HDD) 8.07 lbs / 3.66 kg (for 2.5" SSD)

### PACKAGING DIMENSIONS AND WEIGHT

<b>Dimensions</b>	19.65 x 15.71 x 8.98 in (499 x 399 x 228 mm)
<b>Weight</b>	15.5 lbs / 7.03 kg (for 3.5" HDD) 14.68 lbs / 6.66 kg (for 2.5" SSD)

### PALLETIZATION AND CONTAINER

<b>Type</b>	Normal 40'G container
<b>Pallet Size</b>	47.24 x 39.37 x 4.96 in 1200 x 1000 x 126 mm
<b>Pallet Profile</b>	1 product/carton 6 cartons/layer 9 layers/pallet Total = 54 pcs per pallet
<b>Pallet Size Loaded</b>	47.24 x 39.37 x 86.81 in 1200 x 100 x 2205 mm
<b>Container Profile</b>	21 pallets/40'G container
<b>Product Quantity per Container</b>	54 x 21 = 1134 pcs

### UNIT ENVIRONMENT AND OPERATING CONDITIONS

#### General Unit Operating Guidelines

- Keep the computer away from excessive moisture, direct moisture and the extremes of heat and cold, to ensure that unit is operated within the specified operating range.
- Leave a 10.2 cm (4 in) clearance on all vented sides of the computer to permit the required airflow.
- Never restrict airflow into the computer by blocking any vents or air intakes.
- Do not stack computers on top of each other or place computers so near each other that they are subject to each other's re-circulated or preheated air.
- Occasionally clean the air vents on the front, back, and any other vented side of the computer. Lint, dust and other foreign matter can block the vents and limit the airflow.
- If the computer is to be operated within a separate enclosure, intake and exhaust ventilation must be provided on the enclosure, and the same operating guidelines listed above will still apply.

Temperature Range	Operating: 50° to 95° F (10° to 35° C)* Non-operating: -22° to 140° F (-30° to 60° C)
Relative Humidity	Operating: 10% to 90% (non-condensing at ambient) Non-operating: 5% to 95% (non-condensing at ambient)
Maximum Altitude (unpressurized)	Operating: 10,000 ft (3048 m) Non-operating: 30,000 ft (9144 m)

\* Operating temperature is de-rated 1.0 deg C per 300 m (1000 ft) to 3000 m (10,000 ft) above sea level, no direct sustained sunlight. Maximum rate of change is 10 deg C/Hr. The upper limit may be limited by the type and number of options installed.



### Standard Features and Configurable Modules

#### CERTIFICATIONS

EPEAT® Silver\*  
CECP  
SEPA  
WEEE (Waste, Electric and electronic equipment)  
ENERGY STAR® 6.1  
CEL  
FCC  
UL  
RoHS

\*EPEAT® registered where applicable/supported. EPEAT registration varies by country. See [www.epeat.net](http://www.epeat.net) for registration status by country.

#### SERVICE AND SUPPORT

**On-site Warranty:** One-year (1-1-1) or Three-year (3-3-3) limited warranty delivers three years of on-site, next business day<sup>2</sup> service for parts and labor and complimentary limited technical support. One-year/Three-year onsite and labor are not available in all countries. Service offers terms up to 5 years by choosing an optional HP Care Pack.<sup>4</sup> To choose the right level of service for your HP product, visit HP Care Pack Central: [www.hp.com/go/cpc](http://www.hp.com/go/cpc)

**NOTE 1:** Terms and conditions may vary by country. Certain restrictions and exclusions apply. Other warranty variations may be offered in your region.

**NOTE 2:** On-site service may be provided pursuant to a service contract between HP and an authorized HP third-party provider, and is not available in certain countries. Global service response times are based on commercially reasonable best effort and may vary by country.

**NOTE 3:** Technical support applies only to HP-configured and third-party HP qualified hardware and software.

**NOTE 4:** Service levels and response times for HP Care Packs may vary depending on your geographic location. Service starts on date of hardware purchase. Restrictions and limitations apply. For details, visit [www.hp.com/go/cpc](http://www.hp.com/go/cpc). HP services are governed by the applicable HP terms and conditions of service provided or indicated to Customer at the time of purchase. Customer may have additional statutory rights according to applicable local laws, and such rights are not in any way affected by the HP terms and conditions of service or the HP Limited Warranty provided with your HP Product.

### Technical Specifications - Graphics

#### GRAPHICS

<b>Intel® HD Graphics (integrated)</b>			
<b>HDMI</b>	Multimode capable; supports HDCP, HDMI Audio (2 streams), HBR2 link rates and Multi-Stream Technology for a maximum of 3 displays (including the integrated panel)		
<b>Maximum Graphics Memory</b>	Microsoft Windows 7	Windows 8.1	Windows 10
	Up to 1.7GB	Up to 1.8GB	>4 GB
Note: the actual amount of maximum graphics memory can be less than the amounts listed above depending upon your computer's configuration.			
<b>Maximum Color Depth</b>	24/30/36		
<b>Graphics/Video API Support</b>	6th Generation Core™ processors: <ul style="list-style-type: none"> <li>• Next Generation Intel® Clear Video Technology HD Support is a collection of video playback and enhancement features that improve the end user's viewing experience               <ul style="list-style-type: none"> <li>○ Encode/transcode HD content</li> <li>○ Playback of high definition content including Blu-ray Disc</li> <li>○ Superior image quality with sharper, more colorful images</li> </ul> </li> <li>• DirectX Video Acceleration (DXVA) support for accelerating video processing               <ul style="list-style-type: none"> <li>○ Full AVC/VC1/MPEG2/HEVC HW Decode</li> </ul> </li> <li>• Advanced Scheduler 2.0, 1.0</li> <li>• Windows 7, Windows 8.1, Windows 10, Linux OS Support</li> <li>• DirectX 12.1</li> <li>• OpenGL 4.4</li> <li>• Open CL 1.2 (Intel® HD Graphics 510)</li> <li>• Open CL 1.2/2.0 (Intel® HD Graphics 530)</li> </ul>		
<b>Supported Display Resolutions and Refresh Rates</b>			
<b>Note:</b> other resolutions may be available but are not recommended as they may not have been tested and qualified by HP			
	<b>Resolution</b>		<b>Refresh Rates</b>
	800x600		60 Hz
	1024x768		60 Hz
	1152x864		60 Hz
	1280x600		60 Hz
	1280x720		60 Hz
	1280x800		60 Hz
	1280x960		60 Hz
	1280x1024		60 Hz
	1360x768		60 Hz
	1366x768		60 Hz
	1400x1050		60 Hz
	1440x900		60 Hz
	1600x900		60 Hz
	1600x1200*		60 Hz
	1680x1050		60 Hz
	1920x1080		60 Hz
* Only supported on displays connected to the external DisplayPort connector.			

### Technical Specifications - Graphics

#### NVIDIA® GeForce® GT 730 2GB PCIe x8 Graphics Card

<b>Introduction</b>	Get impressive graphics and high resolution dual-display performance in a low profile, PCI Express x8 graphics add-in card based on the NVIDIA® Kepler™ Graphics Processor. Improve your everyday PC, Web conferencing, and video or photo editing.
<b>Memory</b>	2GB DDR3 64-bit wide frame buffer operating at 900 MHz
<b>Controller Clock Speed</b>	NVIDIA® Kepler™ GPU operating at 902 MHz
<b>Multi-display Support</b>	A maximum of 4 displays are supported by the card.
<b>Graphics /API support</b>	Supports Microsoft DirectX 12, OpenGL 4.4 and OpenCL 2 APIs, Shade Model 5, UVD 4.2, VCE 2.0, and DirectCompute 11
<b>Output Connectors</b>	1 x Dual-Link DVI-I, 1x DisplayPort; Includes DVI to VGA adapter Display Port output is multi-mode capable, support Audio, HBR2 and MST

#### Supported Display Resolutions and Refresh Rates

**Note:** other resolutions may be available but are not recommended as they may not have been tested and qualified by HP

Resolution	Refresh Rate*	VGA (DVI-VGA adapter)	DVI-D	DisplayPort	Standard
640 x 480	60, 75, 85	X	X	X	VESA DMT, CVT 0.31M3
720 x 400	70	X	X	X	IBM VGA
800 x 600	60, 75, 85	X	X	X	VESA DMT, CVT0.48M3
1024 x 768	60, 75, 85	X	X	X	VESA DMT, CVT 0.79M3
1152 x 864	60, 75, 85	X	X	X	VESA DMT, CVT 0.83MA
1280 x 720	60, 75, 85	X	X	X	VESA DMT, CVT 0.92M9, CEA-770.3
1280 x 768	60, 60RB, 75, 85	X	X	X	VESA DMT, CVT 0.98M9/0.98M9-R
1280 x 800	60, 75, 85	X	X	X	VESA DMT
1280 x 960	60, 75, 85	X	X	X	VESA DMT
1280 x 1024	60, 75, 85	X	X	X	VESA DMT, CVT 1.31M4
1366 x 768	60, 60RB	X	X	X	VESA DMT
1440 x 900	60, 60RB	X	X	X	VESA DMT
1600 x 900	60, 60RB, 75, 85	X	X	X	VESA DMT
1680 x 1050	60, 60RB, 75	X	X	X	VESA DMT, CVT 1.76MA/1.76MA-R
1920 x 1080	60	X	X	X	VESA DMT, CVT 2.07M9, SMPTE 274M
1920 x 1200	60, 60RB, 75, 85	X	X	X	DMT, CVT 2.30MA/2.30MA-R
1600 x 1200	60, 75, 85	X	X	X	VESA DMT, 1.92M3

### Technical Specifications - Graphics

1920 x 1440	60, 75, 85	X	X	X	VESA DMT, CVT 2.76M3
2048 x 1536	60,75	X	X	X	CVT 3.15M3
2560 x 1440	59.951		X	X	CVT 3.69M9-R
2560 x 1600	60, 60RB		X	X	VESA DMT, CVT 4.10MA/4.10MA-R
3840 x 2160	24			X	CVT-RBv1/v2 (8.29M9-R), SMPTE 274M
3840 x 2160	25			X	CVT-RBv1/v2 (8.29M9-R), SMPTE 274M
3840 x 2160	30		X	X	CVT-RBv1/v2 (8.29M9-R), SMPTE 274M
3840 x 2160	60			X	CVT-RBv1/v2 (8.29M9-R), SMPTE 274M
4096 x 2160	24			X	CVT-RBv1/v2 (8.85M-R), SMPTE 274M
4096 x 2160	25			X	CVT-RBv1/v2 (8.85M-R), SMPTE 274M
4096 x 2160	30			X	CVT-RBv1/v2 (8.85M-R), SMPTE 274M
4096 x 2160	60			X	CVT-RBv1/v2 (8.85M-R), SMPTE 274M
1920 x 1080	60		X	X	VESA (SMPTE 274M)
1920 x 1080	50		X	X	SMPTE 274M
1920 x 1080	30		X	X	SMPTE 274M
1920 x 1080	24		X	X	SMPTE 274M
1280 x 720	60		X	X	VESA (CEA-770.3)
1280 x 720	50		X	X	SMPTE 296M
720 x 480	60		X	X	MHL (CEA-770.2)
720 x 576	50		X	X	ITU-R BT.1358
640 x 480	60		X	X	CEA (VESA DMT)

\* >60 refresh rates only for analog (VGA) signaling

### Technical Specifications – Hard Disk and Solid State Storage

<b>1TB 7.2K rpm SATA 6.0Gb/s 3.5” Hard Disk Drive</b>		
<b>Capacity</b>	1,000,204,886,016 bytes	
<b>Rotational Speed</b>	7,200 rpm	
<b>Interface</b>	Serial ATA 3.0 (6.0 Gb/s)	
<b>Buffer Size</b>	32 MB	
<b>Logical Blocks</b>	1,953,525,168	
<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track:</b>	2.0 ms
	<b>Average:</b>	11 ms
	<b>Full-Stroke:</b>	21 ms
<b>Height</b> (nominal)	1 in/2.54 cm	
<b>Width</b> (nominal)	Media diameter: 3.5 in/8.89 cm	
	Physical size: 4 in/10.2 cm	
<b>Operating Temperature</b>	41° to 131° F (5° to 55° C)	
<p><b>NOTE:</b> "For hard drives and solid state drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 16 GB (for Windows 7) and 36 GB (for Windows 8.1/10) of system disk is reserved for the system recovery software."</p>		

<b>500GB 7.2K rpm SATA 6.0Gb/s 3.5” Hard Disk Drive</b>		
<b>Capacity</b>	500,107,862,016 bytes	
<b>Rotational Speed</b>	7,200 rpm	
<b>Interface</b>	Serial ATA 3.0 (6.0 Gb/s)	
<b>Buffer Size</b>	16 MB	
<b>Logical Blocks</b>	976,773,168	
<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track:</b>	2.0 ms
	<b>Average:</b>	11 ms
	<b>Full-Stroke:</b>	21 ms
<b>Height</b> (nominal)	1 in/2.54 cm	

### Technical Specifications – Hard Disk and Solid State Storage

<b>Width</b> (nominal)	Media diameter: 3.5 in/8.89 cm
	Physical size: 4 in/10.2 cm
<b>Operating Temperature</b>	41° to 131° F (5° to 55° C)
NOTE: "For hard drives and solid state drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 16 GB (for Windows 7) and 36 GB (for Windows 8.1/10) of system disk is reserved for the system recovery software."	

<b>128GB SATA 2.5" Value (Non-SED) Solid State Drive</b>		
<b>Unformatted Capacity</b>	128 GB	
<b>Architecture</b>	TLC NAND Flash	
<b>Interface</b>	SATA 3.2 (6.0 Gb/s)	
<b>Form Factor</b>	2.5 inch	
<b>Dimensions (W x H x D)</b>	6.98 x 0.7 x 10.05 cm	
<b>Weight</b>	31g	
<b>Bandwidth Performance</b>	Sustained Sequential Read:	Up to 510 MB/s
	Sustained Sequential Write:	Up to 330 MB/s
	Random Read:	Up to 38K IOPs
	Random Write:	Up to 70K IOPs
<b>Power</b>	DC power requirement:	5 VDC 5%-100 mV ripple p-p
	Total power consumption:	50mW (active); 20mW (idle)
<b>Useful Drive Life</b>	72TB written, up to 40GB/day for 5 years	
<b>Environmental</b> (all conditions, non-condensing)	Operating Temperature:	32° to 158° F (0° to 70° C)
	Relative Humidity:	5% to 95%
	Shock:	1,500 G/0.5 ms
NOTE: "For hard drives and solid state drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36 GB (for Windows10) of system disk is reserved for the system recovery software."		

### Technical Specifications - Removable Storage

<b>HP 9.5mm Desktop G2 Slim SuperMulti DVD Writer Drive</b>		
<b>Height</b>	9.5 mm height	
<b>Orientation</b>	Either horizontal or vertical	
<b>Interface type</b>	SATA/ATAPI	
<b>Disc recording capacity</b>	Up to 8.5 GB DL or 4.7 GB standard	
<b>Dimensions (W x H x D)</b>	5.04 x 0.37 x 5.0 in (128 x 9.5 x 127 mm) without bezel	
<b>Weight (max)</b>	0.31 lb (140 g)	
<b>Write speeds</b>	DVD-RAM	Up to 5X
	DVD-R DL	Up to 6X
	DVD+R	Up to 8X
	DVD+RW	Up to 8X
	DVD+R DL	Up to 6X
	DVD-R	Up to 8X
	DVD-RW	Up to 6X
	CD-R	Up to 24X
	CD-RW	Up to 10X
<b>Read speeds</b>	DVD-RAM	Up to 5X
	DVD-RW, DVD+RW	Up to 8X
	DVD-R DL, DVD+R DL	Up to 8X
	DVD+R, DVD-R	Up to 8X
	DVD-ROM DL, DVD-ROM	Up to 8X
	CD-ROM, CD-R	Up to 24X
	CD-RW	Up to 24X
<b>Access time</b> (typical reads, including settling)	Random	DVD-ROM: 170 ms (typical), CD-ROM: 170 ms (typical)
	Full Stroke	DVD-ROM: 320 ms (typical), CD-ROM: 320 ms (typical)
	Stop Time	6 seconds (typical)
<b>Power</b>	Source	Slimline SATA DC power receptacle
	DC Power Requirement	5 VDC ± 5%-100 mV ripple p-p
	DC Current	5 VDC (< 1000 mA typical, 1600 mA maximum)
<b>Environmental conditions</b> (operating - non-condensing)	Temperature	41° to 122° F (5° to 50° C)
	Relative Humidity	10% to 80%
	Maximum Wet Bulb Temperature	84° F (29° C)

### Technical Specifications - Removable Storage

<b>HP 9.5mm Desktop G2 Slim DVD-ROM Drive</b>		
<b>Height</b>	9.5mm	
<b>Orientation</b>	Either horizontal or vertical	
<b>Interface type</b>	SATA/ATAPI	
<b>Dimensions (W x H x D)</b>	5.04 x 0.37 x 5.0 in (128 x 9.5 x 127 mm) without bezel	
<b>Weight (max)</b>	Up to 0.31 lb (140g) without bezel	
<b>Read speeds</b>	DVD+R/-R/+RW/ -RW/+R DL /-R DL	Up to 8X
	DVD-ROM	Up to 8X
	CD-ROM, CD-R	Up to 24X
	CD-RW	Up to 24X
<b>Access time</b> (typical reads, including settling)	Random	DVD-ROM: 170 ms (typical), CD-ROM: 170 ms (typical)
	Full Stroke	DVD-ROM: 320 ms (typical), CD-ROM: 320 ms (typical)
<b>Power</b>	Source	Slimline SATA DC power receptacle
	DC Power Requirement	5 VDC ± 5%-100 mV ripple p-p
	DC Current	5 VDC - <1000 mA typical, < 1600 mA maximum
<b>Environmental</b> (all conditions non-condensing)	Temperature	41° to 122° F (5° to 50° C)
	Relative Humidity	10% to 80%
	Maximum Wet Bulb Temperature (operating)	84° F (29° C)



### Technical Specifications - Audio

<b>High Definition Audio</b>	
<b>Type</b>	Integrated
<b>HD Stereo Codec</b>	Realtek 2.1-channel ALC3252 codec
<b>Audio I/O Ports</b>	Front Headphone-Out(Gain=0 dB, 1 ohm Input Impedance, function is configurable by audio driver)
	Rear Line-In/Microphone input (Gain=0 dB ,27-K ohm Input Impedance, function is configurable by audio driver)
	Rear Line-Out*(Gain=0 dB, 200 ohm Input Impedance, function is configurable by audio driver)
	All ports are 3.5mm
<b>Internal Speaker Amplifier</b>	2W 4 ohm amplifier for the internal speaker only.
<b>Multi-streaming Capable</b>	Multi-streaming can be enabled in the Realtek control panel to allow independent audio streams to be sent to/from the front and rear jacks.
<b>Sampling</b>	8 kHz - 192 kHz
<b>Wavetable Syntheses</b>	Yes – Uses OS soft wavetable
<b>Analog Audio</b>	Yes
<b># of Channels on Line-Out</b>	Stereo (Left & Right channels)
<b>Internal Speaker</b>	Yes
<b>External Speaker Jack</b>	Yes

### Technical Specifications - Networking/Communication

<b>Realtek RTL8111HSH -CG GbE</b>		
<b>10/100/1000 NIC</b>	<b>Ethernet Features</b>	10 Mbit/s operation (10BASE-T; IEEE 802.3i; IEEE 802.3 clauses 13-14) 100 Mbit/s operation (100BASE-TX; IEEE 802.3u; IEEE 802.3 clauses 21-30) 1000 Mbit/s operation (1000BASE-T; IEEE 802.3ab; IEEE 8023 clauses 40) Auto-Negotiation (Automatic Speed Selection) Full Duplex Operation at all Speeds, Half Duplex operation at 10 and 100 Mbit/s IEEE 802.1p QoS (Quality of Service) Support IEEE 802.1q VLAN support IEEE 802.3x Flow Control (IEEE 802.3 clauses 31-32; configurable) IEEE 802.3az EEE (Energy Efficient Ethernet) Jumbo Frame 9K Auto MDI/MDIX Crossover cable detection
	<b>Power Management</b>	ACPI compliant – multiple power modes Situation-sensitive features reduce power consumption Advanced link down power saving for reducing link down power consumption
	<b>Performance Features</b>	TCP/IP/UDP Checksum Offload (configurable) Protocol Offload (ARP & NS) Large send offload and Giant send offload Receiving Side Scaling
	<b>Manageability</b>	Wake-on-LAN from standby and hibernation (Magic Packet and Microsoft Wake-Up Frame); Wake-on-LAN from off (Magic Packet only) PXE 2.1 Remote Boot Statistics Gathering (SNMP MIB II, Ethernet-like MIB, Ethernet MIB (802.3x, clause 30)) Comprehensive diagnostic and configuration software suite Virtual Cable Doctor for Ethernet cable status
	<b>Interface</b>	PCI Express 1.1 x1 to fully support ASPM L0s/L1 and CLKREQ
	<b>NIC Device Driver Name</b>	PCIe GbE Ethernet Family Controller

<b>Intel® 3168 802.11ac with PCIe x1 WLAN/ Bluetooth® Combo*</b>		
<b>Wireless LAN Standards</b>	IEEE 802.11a IEEE 802.11b IEEE 802.11g IEEE 802.11n IEEE 802.11ac	
<b>Interoperability</b>	Wi-Fi certification	
<b>Frequency Bands</b>	802.11b/g/n	2.402 – 2.482 GHz  <b>Note:</b> The FCC has declared as of January 1, 2015 products that utilize passive scanning on channel 12/13 and are capable of transmitting must fully comply with requirements of 15.247 or otherwise disable those channels.

### Technical Specifications - Networking/Communication

	802.11a/n	4.9 – 4.95 GHz (Japan) 5.15 – 5.25 GHz 5.25 – 5.35 GHz 5.47 – 5.725 GHz 5.825 – 5.850 GHz <b>Note: Indonesia only supports 5.725 - 5.825 GHz (CH149 - CH161)</b>
<b>Data Rates</b>		<ul style="list-style-type: none"> <li>802.11b: 1, 2, 5.5, 11 Mbps</li> <li>802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps</li> <li>802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps</li> <li>802.11n: MCS 0 ~ MCS 15, (20MHz, and 40MHz)</li> <li>802.11ac : MCS0 ~ MCS7, (1SS) (20MHz, 40MHz, and 80MHz)</li> </ul>
<b>Modulation</b>		Direct Sequence Spread Spectrum  BPSK, QPSK, CCK, 16-QAM, 64-QAM, 256-QAM
<b>Security<sup>1</sup></b>		<ul style="list-style-type: none"> <li>IEEE and WiFi compliant 64 / 128 bit WEP encryption for a/b/g mode only</li> <li>AES-CCMP: 128 bit in hardware</li> <li>802.1x authentication</li> <li>WPA, WPA2: 802.1x. WPA-PSK, WPA2-PSK, TKIP, and AES.</li> <li>WPA2 certification</li> <li>IEEE 802.11i</li> <li>Cisco Certified Extensions, all versions through CCX4 and CCX Lite</li> <li>WAPI</li> </ul>
		<sup>1</sup> Check latest software/driver release for updates on supported security features.
<b>Network Architecture Models</b>		Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)
<b>Roaming</b>		802.11r Fast Roaming
<b>Output Power<sup>2</sup></b>		<ul style="list-style-type: none"> <li>802.11b : +16dBm minimum</li> <li>802.11g : +14dBm minimum</li> <li>802.11a : +14dBm minimum</li> <li>802.11n HT20(2.4GHz) : +14dBm minimum</li> <li>802.11n HT40(2.4GHz) : +12dBm minimum</li> <li>802.11n HT20(5GHz) : +14dBm minimum</li> <li>802.11n HT40(5GHz) : +12dBm minimum</li> <li>802.11ac 80MHz(5GHz) : +11dBm minimum</li> </ul>
		<sup>2</sup> Maximum output power may vary by country according to local regulations.
<b>Power Consumption</b>		Transmit: 2.0 W (max) Receive: 1.6 W (max) Idle mode (PSP): 180 mW (WLAN Associated) Idle mode: 50 mW (WLAN unassociated)

### Technical Specifications - Networking/Communication

	Connect Standby: 10 mW (WLAN+BT) Radio disabled: 5 mW	
<b>Power Management</b>	ACPI and PCI Express compliant power management 802.11 compliant power saving mode	
<b>Receiver Sensitivity<sup>3</sup></b>	802.11b, 1Mbps : -94dBm maximum 802.11b, 11Mbps : -86dBm maximum 802.11g, 6Mbps : -88dBm maximum 802.11g, 54Mbps : -74dBm maximum 802.11a, 6Mbps : -88dBm maximum 802.11a, 54Mbps : -74dBm maximum 802.11n, MCS07 : -69dBm maximum 802.11n, MCS15 : -66dBm maximum 802.11ac, 1SS, MCS-0 : -86dBm maximum 802.11ac, 1SS, MCS-9 : -61 dBm maximum 802.11ac, 2SS, MCS-0 : -83dBm maximum 802.11ac, 2SS, MCS-9 : -58dBm maximum	
	<sup>3</sup> Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CKK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).	
<b>Antenna type</b>	High efficiency antenna with spatial diversity, mounted in the display enclosure Two embedded dual band 2.4/5 GHz antennas are provided to the card to support WLAN MIMO communications and Bluetooth communications	
<b>Form Factors</b>	PCI-Express M.2 MiniCard	
<b>Dimensions</b>	Type 2230 : 2.3 x 22.0 x 30.0 mm Or Type 1630 : 2.3 x 16.0 x 30.0 mm	
<b>Weight</b>	Type 2230 : 2.8g Or Type 1630 : 2g	
<b>Operating Voltage</b>	3.3v +/- 9%	
<b>Temperature</b>	<b>Operating:</b>	14° to 158° F (-10° to 70° C)
	<b>Non-operating:</b>	-40° to 176° F (-40° to 80° C)
<b>Humidity</b>	<b>Operating:</b>	10% to 90% (non-condensing)
	<b>Non-operating:</b>	5% to 95% (non-condensing)
<b>Altitude</b>	<b>Operating:</b>	0 to 10,000 ft (3,048 m)
	<b>Non-operating:</b>	0 to 50,000 ft (15,240 m)
<b>LED Activity</b>	LED Amber – Radio OFF; LED White – Radio ON	
* Wireless access point and Internet service required and not included. Availability of public wireless access points limited.		
<b>HP Integrated Module with Bluetooth 4.0/4.1/4.2 Wireless Technology</b>		
<b>Bluetooth Specification</b>	4.0/4.1/4.2 Compliant	

### Technical Specifications - Networking/Communication

<b>Frequency Band</b>	2402 to 2480 MHz														
<b>Number of Available Channels</b>	Legacy : 0~79 (1 MHz/CH) BLE : 0~39 (2 MHz/CH)														
<b>Data Rates and Throughput</b>	Legacy : 3 Mbps data rate; throughput up to 2.17 Mbps														
	BLE : 1 Mbps data rate; throughput up to 0.2 Mbps Legacy : Synchronous Connection Oriented links up to 3, 64 kbps, voice channels														
	Legacy : Asynchronous Connection Less links 2178.1 kbps/177.1 kbps asymmetric (3-DH5) or 864 kbps symmetric (3-EV5)														
<b>Transmit Power</b>	The Bluetooth component shall operate as a Class II Bluetooth device with a maximum transmit power of + 4 dBm for BR and EDR.														
<b>Receiver Sensitivity Legacy</b>	<table border="1"> <thead> <tr> <th>Modulation</th> <th>0.01% BER</th> <th>0.001% BER</th> </tr> </thead> <tbody> <tr> <td>GFSK</td> <td>-80 dBm</td> <td>-70 dBm</td> </tr> <tr> <td><math>\pi/4</math>-DQPSK</td> <td>-80 dBm</td> <td>-70 dBm</td> </tr> <tr> <td>8DPSK</td> <td>-80 dBm</td> <td>-70 dBm</td> </tr> </tbody> </table>			Modulation	0.01% BER	0.001% BER	GFSK	-80 dBm	-70 dBm	$\pi/4$ -DQPSK	-80 dBm	-70 dBm	8DPSK	-80 dBm	-70 dBm
Modulation	0.01% BER	0.001% BER													
GFSK	-80 dBm	-70 dBm													
$\pi/4$ -DQPSK	-80 dBm	-70 dBm													
8DPSK	-80 dBm	-70 dBm													
<b>Power Consumption</b>	Peak (Tx) 330 mW Peak (Rx) 230 mW Selective Suspend 17 mW														
<b>Range</b>	Legacy Up to 33 ft (10 m) BLE Up to 99 ft (30 m)														
<b>Electrical Interface</b>	USB 2.0 compliant														
<b>Bluetooth Software Supported Link Topology</b>	Microsoft Windows Bluetooth Software														
<b>Electrical Interface Bluetooth Software Supported Security</b>	Point to Point, Multipoint Pico Nets up to 7 slaves														
	Full support of Bluetooth Security Provisions														
<b>Power Management Certifications</b>	Microsoft Windows ACPI, and USB Bus Support														
	Self-configurable to optimize power conservation in all operating modes, including Standby, Hold, Park, and Sniff														
<b>Security</b>	All necessary regulatory approvals for supported countries, including:														
<b>Certifications Bluetooth Profiles Supported</b>	FCC (47 CFR) Part 15C, Section 15.247 & 15.249														
<b>Power Management Certifications</b>	ETS 300 328, ETS 300 826														
	Low Voltage Directive IEC950														

### Technical Specifications - Networking/Communication

<b>Certifications</b>	UL, CSA, and CE Mark
<b>Bluetooth Profiles Supported</b>	Serial Port Profile (SPP) <sup>1</sup> Service Discovery Application Profile (SDAP) Dial-Up Networking (DUN) <sup>1,2</sup> Generic Object Exchange Profile (GOEP) <sup>1,2</sup> Object Push Profile (OPP) <sup>1,2</sup> Hard Copy Cable Replacement (HCRP) <sup>1,2</sup> Personal Area Networking Profile (PAN) <sup>1,2</sup> Human Interface Device Profile (HID) <sup>1,2</sup> Hands Free Profile (HFP) Advanced Audio Distribution Profile (A2DP)
<b>Bluetooth V4.1/V4.2 support feature</b>	V4.1: ESR5/6/7 compliant V4.2: ESR8 compliant, LE Secure Connection – Basic.

After-Market Options (availability may vary by region)

<b><u>Type</u></b>	<b><u>Description</u></b>	<b><u>Part #</u></b>
<b>Memory</b>	HP 4GB DDR4-2133 DIMM	P1N51AA
	HP 8GB DDR4-2133 DIMM	P1N52AA
<b>Storage</b>	HP 500GB SATA 6.0Gb/s Hard Drive	QK554AA
<b>Graphics</b>	NVIDIA GeForce GT 730 2GB PCIe x8 Card	N3R90AA
<b>Security</b>	HP Business PC Security Lock V2 Kit	N3R93AA
<b>Multimedia</b>	HP Business Headset v2	N3R89AA
	HP USB Business Speakers v2	T4E61AA
<b>Input</b>	HP USB Keyboard	QY776AA
	HP Conferencing Keyboard	K8P74AA
	HP USB Conferencing Keyboard	N8N57AA
	HP USB Business Slim Keyboard	N3R87AA
	HP USB Antimicrobial Keyboard and Mouse (China Only)	K7X25AA

© Copyright 2016 HP Development Company, L.P.

The information contained herein is subject to change without notice. The only warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein. Microsoft and Windows are registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries. Intel, Celeron®, Core, Pentium are registered trademarks or trademarks of Intel Corporation in the U.S. and/or other countries. Bluetooth is a trademark of its proprietor, used by HP Inc. under license. NVIDIA, GeForce and NVS are trademarks and/or registered trademarks of NVIDIA Corporation in the U.S. and other countries. ENERGY STAR is a registered trademark owned by the U.S. Environmental Protection Agency.



### Change Log

Date of change:	Version History:		Description of change:
	Version 1 to 2		