

## S1700 Series Switches



# S1700 Series Switches

## Product Overview

The S1700 series enterprise switches (S1700s) are next-generation energy-saving Ethernet access switches. The S1700 uses high-performance hardware, which offers a wide array of features to help customers build secure, reliable, high-performance networks. The S1700 is easy to install and maintain, and is ideal for small-size and medium-size enterprises, Internet cafes, hotels, and schools.

The S1700 consists of unmanaged switches, a web-managed switch and Web/SNMP-based switches:

- Unmanaged switches include the S1700-24-AC, S1700-52R-2T2P-AC, S1724G, S1700-24GR and S1700-16G.
- The web-managed switches include the S1728GWR-4P, S1720-10GW-2P, S1720-10GW-PWR-2P, S1720-28GWR-4P, S1720-28GWR-4X, S1720-28GWR-PWR-4P, S1720-28GWR-PWR-4X, S1720-52GWR-4P, S1720-52GWR-4X, S1720-52GWR-PWR-4P, S1720-52GWR-PWR-4X, S1720-28GWR-PWR-4TP.
- Web/SNMP-based switches include the S1700-28FR-2T2P-AC, S1700-28GFR-4P-AC, S1700-52FR-2T2P-AC, S1700-52GFR-4P-AC, S1720-20GFR-4TP and S1720-28GFR-4TP, S1720-10GW-2P-E, S1720-10GW-PWR-2P-E, S1720-28GWR-4P-E, S1720-28GWR-4X-E, S1720-28GWR-PWR-4P-E, S1720-28GWR-PWR-4TP-E, S1720-28GWR-PWR-4X-E, S1720-52GWR-4P-E, S1720-52GWR-4X-E, S1720-52GWR-PWR-4P-E, S1720-52GWR-PWR-4X-E.

## Product Appearance

### S1700-24-AC



- 24 Ethernet 10/100 ports
- AC power supply
- Forwarding performance: 3.6 Mpps
- Switching Capacity: 4.8 Gbps

### S1700-52R-2T2P-AC



- 48 Ethernet 10/100 ports, 2 Ethernet 10/100/1000 ports and 2 Gig SFP
- AC power supply
- Forwarding performance: 13.2 Mpps
- Switching Capacity: 17.6 Gbps

### S1724G



- 24 Ethernet 10/100/1000 ports
- AC power supply
- Forwarding performance: 36 Mpps
- Switching Capacity: 48 Gbps

### S1700-24GR



- 24 Ethernet 10/100/1000 ports
- AC power supply
- Forwarding performance: 36 Mpps
- Switching Capacity: 48 Gbps

### S1700-16G



- 16 Ethernet 10/100/1000 ports
- AC power supply
- Forwarding performance: 24 Mpps
- Switching Capacity: 32 Gbps

### S1728GWR-4P



- 24 Ethernet 10/100/1000 ports, 4 Gig SFP
- AC power supply
- Forwarding performance: 42 Mpps
- Switching Capacity: 56 Gbps

### S1720-10GW-2P



- 8 Ethernet 10/100/1000 ports, 2 Gig SFP
- AC power supply
- Forwarding performance: 15 Mpps
- Switching Capacity: 68 Gbps

### S1720-10GW-PWR-2P



- 8 Ethernet 10/100/1000 ports, 2 Gig SFP
- PoE+
- AC power supply
- Forwarding performance: 15 Mpps
- Switching Capacity: 68 Gbps

### S1720-28GWR-4P



- 24 Ethernet 10/100/1000 ports, 4 Gig SFP
- AC power supply
- Forwarding performance: 42 Mpps
- Switching Capacity: 68 Gbps

### S1720-28GWR-4X



- 24 Ethernet 10/100/1000 ports, 4 10 Gig SFP+
- AC power supply
- Forwarding performance: 96Mpps
- Switching Capacity: 168Gbps

### S1720-28GWR-PWR-4P



- 24 Ethernet 10/100/1000 ports, 4 Gig SFP
- PoE+
- AC power supply
- Forwarding performance: 42Mpps
- Switching Capacity: 68Gbps

### S1720-28GWR-PWR-4TP



- 24 Ethernet 10/100/1000, 4 Gig SFP and 2 combo 10/100/1000Base-T Ethernet ports
- 8-port PoE+
- AC power supply
- Forwarding performance: 42Mpps
- Switching Capacity: 68Gbps

### S1720-28GWR-PWR-4X



- 24 Ethernet 10/100/1000 ports, 4 10 Gig SFP+
- PoE+
- AC power supply
- Forwarding performance: 96Mpps
- Switching Capacity: 168Gbps

### S1720-52GWR-4P



- 48 Ethernet 10/100/1000 ports, 4 Gig SFP
- AC power supply
- Forwarding performance: 78Mpps
- Switching Capacity: 336Gbps

### S1720-52GWR-4X



- 48 Ethernet 10/100/1000 ports, 4 10 Gig SFP+
- AC power supply
- Forwarding performance: 132Mpps
- Switching Capacity: 336Gbps

#### S1720-52GWR-PWR-4P



- 48 Ethernet 10/100/1000 ports, 4 Gig SFP
- PoE+
- AC power supply
- Forwarding performance: 78Mpps
- Switching Capacity: 336Gbps

#### S1720-52GWR-PWR-4X



- 48 Ethernet 10/100/1000 ports, 4 10 Gig SFP+
- PoE+
- AC power supply
- Forwarding performance: 132Mpps
- Switching Capacity: 336Gbps

#### S1700-28FR-2T2P-AC



- 24 Ethernet 10/100 ports, 2 Ethernet 10/100/1000 ports and 2 Gig SFP
- AC power supply
- Forwarding performance: 9.6Mpps
- Switching Capacity: 12.8Gbps

#### S1700-52FR-2T2P-AC



- 48 Ethernet 10/100 ports, 2 Ethernet 10/100/1000 ports and 2 Gig SFP
- AC power supply
- Forwarding performance: 13.2Mpps
- Switching Capacity: 17.6Gbps

#### S1700-28GFR-4P-AC



- 24 Ethernet 10/100/1000 ports, 4 Gig SFP
- AC power supply
- Forwarding performance: 42 Mpps
- Switching Capacity: 56Gbps

#### S1700-52GFR-4P-AC



- 48 Ethernet 10/100/1000 ports, 4 Gig SFP
- AC power supply
- Forwarding performance: 78 Mpps
- Switching Capacity: 104Gbps

### S1720-20GFR-4TP



- 16 Ethernet 10/100/1000 ports, 4 Gig SFP ports, 2 combo 10/100/1000Base-T Ethernet ports
- AC power supply
- Forwarding performance: 30Mpps
- Switching Capacity: 128Gbps

### S1720-28GFR-4TP



- 24 Ethernet 10/100/1000 ports, 4 Gig SFP ports, 2 combo 10/100/1000Base-T Ethernet ports
- AC power supply
- Forwarding performance: 42Mpps
- Switching Capacity: 128Gbps

### S1720-10GW-2P-E



- 8 Ethernet 10/100/1000 ports, 2 Gig SFP
- AC power supply
- Forwarding performance: 15Mpps
- Switching Capacity: 68Gbps

### S1720-10GW-PWR-2P-E



- 8 Ethernet 10/100/1000 ports, 2 Gig SFP
- PoE+
- AC power supply
- Forwarding performance: 15Mpps
- Switching Capacity: 68Gbps

### S1720-28GWR-4P-E



- 24 Ethernet 10/100/1000 ports, 4 Gig SFP
- AC power supply
- Forwarding performance: 42Mpps
- Switching Capacity: 68Gbps

### S1720-28GWR-4X-E



- 24 Ethernet 10/100/1000 ports, 4 10 Gig SFP+
- AC power supply
- Forwarding performance: 96Mpps
- Switching Capacity: 168Gbps

#### S1720-28GWR-PWR-4P-E



- 24 Ethernet 10/100/1000 ports, 4 Gig SFP
- PoE+
- AC power supply
- Forwarding performance: 42Mpps
- Switching Capacity: 68Gbps

#### S1720-28GWR-PWR-4TP-E



- 24 Ethernet 10/100/1000, 4 Gig SFP and 2 combo 10/100/1000Base-T Ethernet ports
- 8-port PoE+
- AC power supply
- Forwarding performance: 42Mpps
- Switching Capacity: 68Gbps

#### S1720-28GWR-PWR-4X-E



- 24 Ethernet 10/100/1000 ports, 4 10 Gig SFP+
- PoE+
- AC power supply
- Forwarding performance: 96Mpps
- Switching Capacity: 168Gbps

#### S1720-52GWR-4P-E



- 48 Ethernet 10/100/1000 ports, 4 Gig SFP
- AC power supply
- Forwarding performance: 78Mpps
- Switching Capacity: 336Gbps

#### S1720-52GWR-4X-E



- 48 Ethernet 10/100/1000 ports, 4 10 Gig SFP+
- AC power supply
- Forwarding performance: 132Mpps
- Switching Capacity: 336Gbps

#### S1720-52GWR-PWR-4P-E



- 48 Ethernet 10/100/1000 ports, 4 Gig SFP
- PoE+
- AC power supply
- Forwarding performance: 78Mpps
- Switching Capacity: 336Gbps



### S1720-52GWR-PWR-4X-E



- 48 Ethernet 10/100/1000 ports, 4 10 Gig SFP+
- PoE+
- AC power supply
- Forwarding performance: 132Mpps
- Switching Capacity: 336Gbps

## Product Features

### Innovative energy-saving design

- The S1700 supports Energy Efficient Ethernet (EEE), which enables the switch to enter a power-saving mode when traffic is light.
- The S1700 can adjust the power output for transmissions based on the cable length. It can also set any ports that are not transmitting traffic to sleep mode.
- The models that use a fan-free design reduce power consumption and noise.

### Non-blocking and high-speed forwarding

- All S1700 ports provide Layer 2 wire-speed forwarding capabilities to ensure non-blocking packet forwarding. S1700 models provide optical and electrical GE uplink ports, which facilitate user access and are cost-effective.
- The S1700/S1720/S1720-E MAC address table supports up to 8K/16K/16K of MAC addresses, making it easy to expand networks and deploy new services. The S1700 support layer 3 static routing-forwarding which include IPv4 and IPv6 protocols. The S1720-E support RIP, RIPng, OSPF.

### Convenient management and maintenance

- The S1700 is easy to manage and maintain, being equipped with a one-key operation button on the front panel.
- Web-managed S1700 models come with a web network management system, making it easy to configure switches.
- SNMP-based S1700 models allow for the use of an SNMP-based NMS for centralized configuration and management.
- Web/SNMP-based S1720/S1720-E models can support CLI and console port configuration.

### Powerful security performance

- The S1700 provides a range of security features, including 802.1x, RADIUS, Portal and NAC. The S1700 also supports packet filtering based on MAC addresses or ports in order to defend against hackers and virus attacks.

### Great networking and bandwidth extensibility

- The S1700 provides LACP, STP, RSTP, and MSTP functions to implement link aggregation and backup. S1720 switches support up to 64 MSTP instances for flexible networking.



## Product Specifications

### S1700 hardware specifications

Type	Unmanaged Switch				
Model	S1700-24-AC	S1700-52R-2T2P-AC	S1700-16G	S1700-24GR	S1724G
Downlink port	24 Ethernet 10/100 ports	48 Ethernet 10/100 ports	16 Ethernet 10/100/1000 ports	24 Ethernet 10/100/1000 ports	24 Ethernet 10/100/1000 ports
Uplink port	Shared with downlink ports	2 Ethernet 10/100/1000 ports and 2 Gig SFP	Shared with downlink ports		
MAC address table	8 K MAC				
Dimensions mm (W*D *H)	320*208*43.6	442*220*43.6	320*208*43.6	442*220*43.6	320*208*43.6
Input voltage	Rated AC power: 100-240V AC; 50/60Hz Max AC voltage: 90-264V AC; 47/63Hz				
EEE	NA				
Power consumption	<3.9W	<22.6W	<10W	<14.2W	<14.2W
Operating temperature	0°C to 45°C				
Humidity (non-condensing)	5% ~ 95%	10% ~ 90%	5% ~ 95%		
Heat dissipation	Fan-free natural heat dissipation				

Type	Web-managed Switch			
Model	S1728GWR-4P	S1720-10GW-2P S1720-10GW-PWR-2P	S1720-28GWR-4P S1720-28GWR-PWR-4P	S1720-28GWR-4X S1720-28GWR-PWR-4X
Downlink port	24 Ethernet 10/100/1000 ports	8 Ethernet 10/100/1000 ports	24 Ethernet 10/100/1000 ports	24 Ethernet 10/100/1000 ports
Uplink port	4 Gig SFP	2 Gig SFP	4 Gig SFP	4 10 Gig SFP+
MAC address table	8K MAC	16K MAC		
Dimensions mm (W*D *H)	S1720-10GW-2P: 250 × 180 × 43.6 mm S1720-10GW-PWR-2P: 320 × 220 × 43.6 mm S1728GWR-4P/S1720-28GWR-4P/S1720-28GWR-4X: 442 × 220 × 43.6 mm S1720-28GWR-PWR-4P/S1720-28GWR-PWR-4X: 442 × 310 × 43.6 mm			
Input voltage	100 V to 240 V AC, 50/60 Hz			

Type	Web-managed Switch			
Model	S1728GWR-4P	S1720-10GW-2P S1720-10GW-PWR-2P	S1720-28GWR-4P S1720-28GWR-PWR-4P	S1720-28GWR-4X S1720-28GWR-PWR-4X
EEE	Support			
Power consumption	< 15W	S1720-10GW-2P: 11.86W S1720-10GW-PWR-2P: without PD: 14.63W; with PD: 159.2W(PoE: 123.2W)	S1720-28GWR-4P: 20.2W S1720-28GWR-PWR-4P: without PD:40.4W; with PD:446.7W(PoE: 369.6W)	S1720-28GWR-4X: 27.9W S1720-28GWR-PWR-4X: without PD:42.7W; with PD:448.5W(PoE: 369.6W)
Operating temperature	0°C to 45°C			
Humidity (non-condensing)	5% to 90%	5% to 95%		
Heat dissipation	S1720-28GWR-PWR-4P/S1720-28GWR-PWR-4X: Heat dissipation using fans supporting intelligent speed adjustment Others: Fan-free natural heat dissipation			

Type	Web-managed Switch		
Model	S1720-28GWR-PWR-4TP	S1720-52GWR-4P S1720-52GWR-PWR-4P	S1720-52GWR-4X S1720-52GWR-PWR-4X
Downlink port	24 Ethernet 10/100/1000	48 Ethernet 10/100/1000 ports	48 Ethernet 10/100/1000 ports
Uplink port	4 Gig SFP and 2 combo 10/100/1000Base-T Ethernet ports	4 Gig SFP	4 10 Gig SFP+
MAC address table	16K MAC		
Dimensions mm (W*D*H)	S1720-28GWR-PWR-4TP/S1720-52GWR-4P/S1720-52GWR-4X: 442 × 220 × 43.6 mm S1720-52GWR-PWR-4P /S1720-52GWR-PWR-4X: 442 × 310 × 43.6 mm		
Input voltage	100 V to 240 V AC, 50/60 Hz		
EEE	Support		
Power consumption	without PD:24.4W; with PD:165.528W(PoE: 123.2W)	S1720-52GWR-4P: 47.3W S1720-52GWR-PWR-4P: without PD:61.7W; with PD:461.8W(PoE: 369.6W)	S1720-52GWR-4X: 50.3W S1720-52GWR-PWR-4X: without PD:63.5W; with PD:464.3W(PoE: 369.6W)
Operating temperature	0°C to 45°C		
Humidity (non-condensing)	5% to 95%		
Heat dissipation	S1720-28GWR-PWR-4TP: Fan-free natural heat dissipation Others: Heat dissipation using fans supporting intelligent speed adjustment		

Type	Web/SNMP-based Switch			
Model	S1700-28FR-2T2P-AC	S1700-52FR-2T2P-AC	S1700-28GFR-4P-AC	S1700-52GFR-4P-AC
Downlink port	24 Ethernet 10/100 ports	48 Ethernet 10/100 ports	24 Ethernet 10/100/1000 ports	48 Ethernet 10/100/1000 ports
Uplink port	2 Ethernet 10/100/1000 ports and 2 Gig SFP	2 Ethernet 10/100/1000 ports and 2 Gig SFP	4 Gig SFP	4 Gig SFP
MAC address table	8 K MAC			
Dimensions mm (W*D *H)	442*220*43.6 mm			
Input voltage	100 V to 240 V AC, 50/60 Hz			
EEE	NA	NA	Support	Support
Power consumption	<25W	<35W	<30W	<55W
Operating temperature	0°C to 45°C			
Humidity (non-condensing)	10% to 90%			
Heat dissipation	Fan-free natural heat dissipation			Heat dissipation using fans supporting intelligent speed adjustment

Type	Web/SNMP-based Switch			
Model	S1720-20GFR-4TP	S1720-28GFR-4TP	S1720-10GW-2P-E S1720-10GW-PWR-2P-E	S1720-28GWR-4P-E S1720-28GWR-PWR-4P-E
Downlink port	16 Ethernet 10/100/1000 ports	24 Ethernet 10/100/1000 ports	8 Ethernet 10/100/1000 ports	24 Ethernet 10/100/1000 ports
Uplink port	4 Gig SFP and 2 combo 10/100/1000Base-T Ethernet ports	4 Gig SFP and 2 combo 10/100/1000Base-T Ethernet ports	2 Gig SFP	4 Gig SFP
MAC address table	16 K MAC			
Routing Feature	IPv4 and IPv6 static routing		Static routing, RIP, RIPng, OSPF	
Dimensions mm (W*D *H)	442*220*43.6		S1720-10GW-2P-E: 250 × 180 × 43.6 mm S1720-10GW-PWR-2P-E: 320 × 220 × 43.6 mm	S1720-28GWR-4P-E: 442 × 220 × 43.6 mm S1720-28GWR-PWR-4P-E: 442 × 310 × 43.6 mm
Input voltage	100 V to 240 V AC, 50/60 Hz			
EEE	support			

Type	Web/SNMP-based Switch			
Model	S1720-20GFR-4TP	S1720-28GFR-4TP	S1720-10GW-2P-E S1720-10GW-PWR-2P-E	S1720-28GWR-4P-E S1720-28GWR-PWR-4P-E
Power consumption	<20.7W	<24.3W	S1720-10GW-2P-E: 11.86W S1720-10GW-PWR-2P-E: without PD: 14.63W; with PD: 159.2W(PoE: 123.2W)	S1720-28GWR-4P-E: 20.2W S1720-28GWR-PWR-4P-E: without PD: 40.4W; with PD: 446.7W(PoE 369.6W)
Operating temperature	0-1800m: 0-50℃ 1800-4000m: decrease 1℃ when the altitude increases every 220 m		0-1800m: 0-45℃ 1800-5000m: decrease 1℃ when the altitude increases every 220 m	
Humidity (non-condensing)	5% ~ 95%			
Heat dissipation	S1720-28GWR-PWR-4P: Heat dissipation using fans supporting intelligent speed adjustment Others: Fan-free natural heat dissipation			

Type	Web/SNMP-based Switch			
Model	S1720-28GWR-4X-E S1720-28GWR-PWR-4X-E	S1720-28GWR-PWR-4TP-E	S1720-52GWR-4P-E S1720-52GWR-PWR-4P-E	S1720-52GWR-4X-E S1720-52GWR-PWR-4X-E
Downlink port	24 Ethernet 10/100/1000 ports	24 Ethernet 10/100/1000	48 Ethernet 10/100/1000 ports	48 Ethernet 10/100/1000 ports
Uplink port	4 10 Gig SFP+	4 Gig SFP ports, 2 combo 10/100/1000Base-T Ethernet ports	4 Gig SFP	4 10 Gig SFP+
MAC address table	16K MAC			
Dimensions mm (W*D *H)	S1720-28GWR-PWR-4TP-E/S1720-52GWR-4P-E / S1720-28GWR-4X-E /S1720-52GWR-4X-E: 442 × 220 × 43.6 mm S1720-52GWR-PWR-4P-E / S1720-28GWR-PWR-4X-E /S1720-52GWR-PWR-4X-E: 442 × 310 × 43.6 mm			
Input voltage	100 V to 240 V AC, 50/60 Hz			
EEE	Support			
Power Consumption	S1720-28GWR-4X-E: 27.9W S1720-28GWR-PWR-4X-E: without PD:42.7W; with PD:448.5W(PoE 369.6W)	without PD:24.4W; with PD:165.528W(PoE 123.2W)	S1720-52GWR-4P-E: 47.3W S1720-52GWR-PWR-4P-E: without PD:61.7W; with PD:461.8W(PoE 369.6W)	S1720-52GWR-4X-E: 50.3W S1720-52GWR-PWR-4X-E: without PD:63.5W; with PD:464.3W(PoE 369.6W)
Operating temperature	0-1800m: 0-45°C 1800-5000m: decrease 1°C when the altitude increases every 220 m			
Humidity (non-condensing)	5% to 95%			
Heat dissipation	S1720-28GWR-4X-E/S1720-28GWR-PWR-4TP-E: Fan-free natural heat dissipation Others: Heat dissipation using fans supporting intelligent speed adjustment			


## Service Features

Item	Web-managed Switch	SNMP-based Switch
Security features	Packet filtering based on MAC addresses MAC address authentication (S1720 Series) Port-based 802.1x authentication RADIUS authentication Portal authentication (S1720 Series) Port isolation Storm suppression (S1720 Series) DHCP snooping (S1720 Series)	Hardware ACL Packet filtering based on MAC addresses MAC address authentication Port-based 802.1x authentication. RADIUS authentication Portal authentication Port isolation Storm suppression Attack defense, which prevents broadcast traffic, ARP attacks, ICMP attacks, TCP attacks, worm viruses, and DoS attacks DHCP snooping
VLANs	256 VLANs (S1720 Series : 4K) Access port Trunk port Hybrid port Management VLAN Voice VLAN	4 K VLANs Access port Trunk port Hybrid port Management VLAN Voice VLAN
QoS	PQ and WRR Four queues on each port (S1720 series: Eight) Queue scheduling based on 802.1p or DSCP priorities	PQ and WRR Eight queues on each port Queue scheduling based on 802.1p or DSCP priorities
STP	STP(IEEE 802.1d) RSTP(IEEE 802.1w) MSTP(IEEE 802.1s) (S1720 series)	STP(IEEE 802.1d) RSTP(IEEE 802.1w) MSTP(IEEE 802.1s)
Multicast	IGMP snooping	IGMP snooping
Routing feature	IPv4 and IPv6 static routing (S1720 series)	IPv4 and IPv6 static routing RIP,RIPng,OSPF (S1720-E series)
Link aggregation	12 link aggregation groups (LAGs) with a maximum of eight ports in each LAG 64 link aggregation groups(S1720 series) Static LACP	12 link aggregation groups (LAGs) with a maximum of eight ports in each LAG 64 link aggregation groups(S1720 series) 120 link aggregation groups(S1720-E series) Static LACP
Port mirroring	Port-based bidirectional flow mirroring	Port-based bidirectional flow mirroring Configuring a trunk as a mirrored interface


Item	Web-managed Switch	SNMP-based Switch
Bandwidth control	Rate limiting for incoming and outgoing packets, with a granularity of 64 kbps	Rate limiting for incoming and outgoing packets, with a granularity of 8 kbps
Broadcast storm suppression	Broadcast storm suppression based on the interface rate Alarm sending when the traffic rate reaches the upper limit	Broadcast storm suppression based on the interface rate Alarm sending when the traffic rate reaches the upper limit
Device management	Web system network management DHCP client One-key restoration	SNMP Web system network management (HTTPS) DHCP client User password protection One-key restoration CLI configuration (S1720/S1720-E series) Console port (S1720/S1720-E series)
Device maintenance	System log Ping Virtual Cable Test (VCT) Link Layer Discovery Protocol (LLDP)	Remote Network Monitoring (RMON) System log Ping and traceroute Virtual Cable Test (VCT) Link Layer Discovery Protocol (LLDP)

## Applications

### Hotels

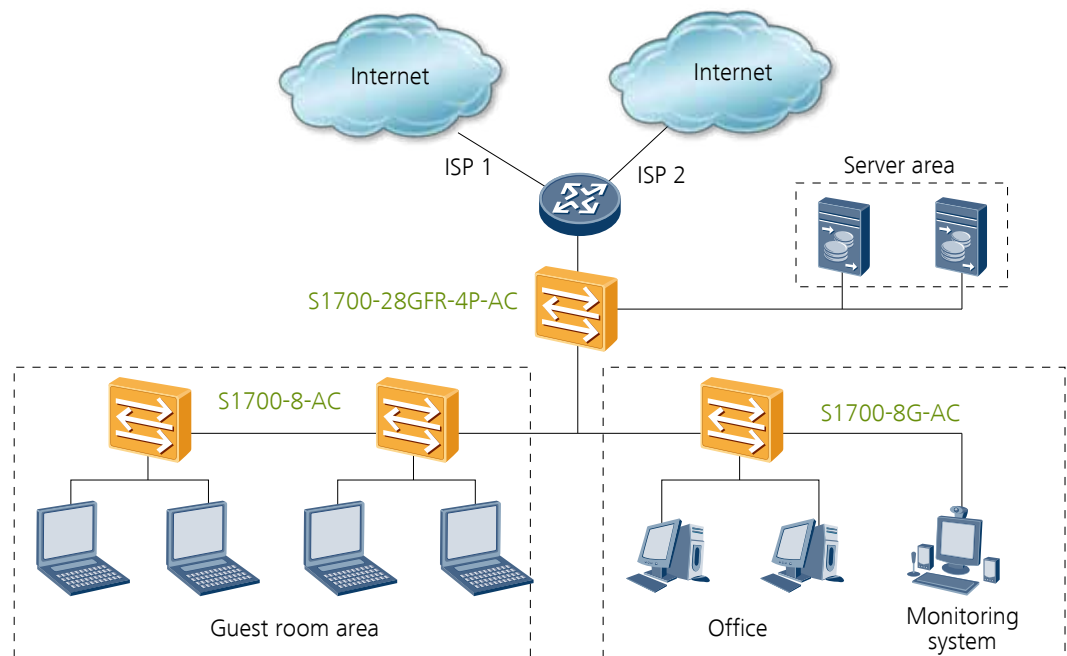

## Schools

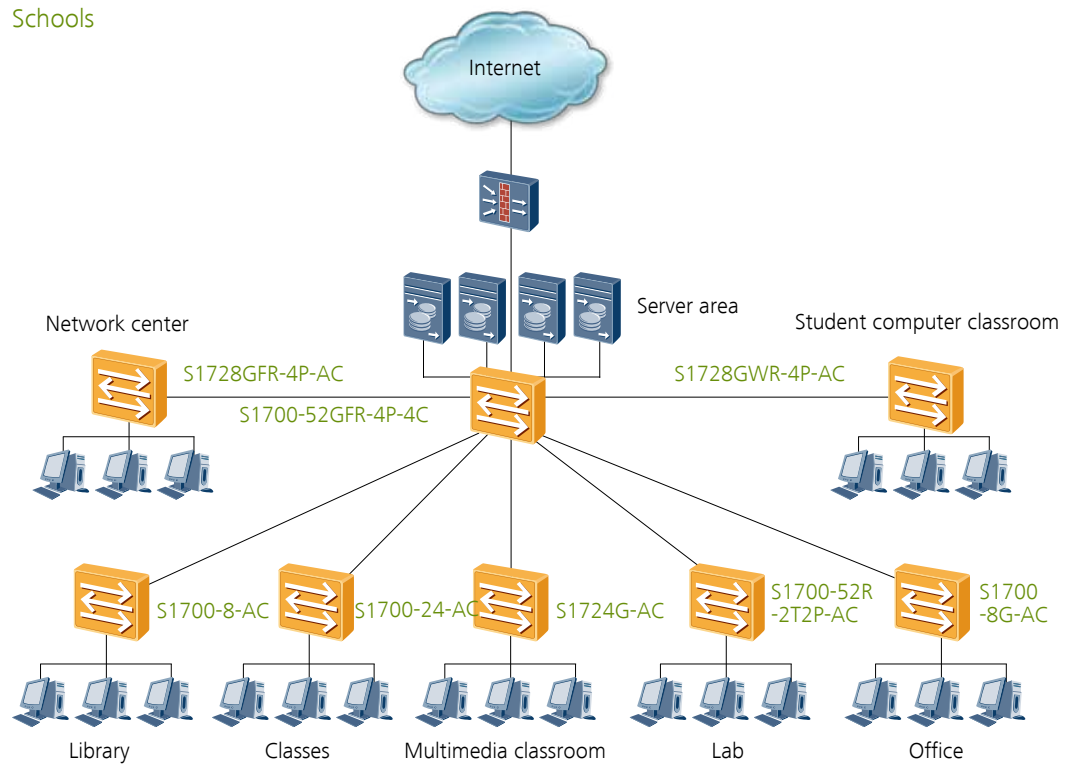

## Product List

### S1700 switch models

Product Description
S1700-16G (16 Ethernet 10/100/1000 ports, AC 110/220V)
S1700-24-AC (24 Ethernet 10/100 ports, AC 110/220V)
S1724G (24 Ethernet 10/100/1000 ports, AC 110/220V)
S1700-24GR (24 Ethernet 10/100/1000 ports, AC 110/220V)
S1728GWR-4P (24 Ethernet 10/100/1000 ports, 4 Gig SFP, AC 110/220V)
S1720-10GW-2P (8 Ethernet 10/100/1000 ports, 2 Gig SFP, AC 110/220V)
S1720-10GW-PWR-2P (8 Ethernet 10/100/1000 PoE+ ports, 2 Gig SFP, AC 110/220V)
S1720-28GWR-4P (24 Ethernet 10/100/1000 ports, 4 Gig SFP, AC 110/220V)
S1720-28GWR-4X (24 Ethernet 10/100/1000 ports, 4 10 Gig SFP+, AC 110/220V)
S1720-28GWR-PWR-4P (24 Ethernet 10/100/1000 PoE+ ports, 4 Gig SFP, AC 110/220V)
S1720-28GWR-PWR-4X (24 Ethernet 10/100/1000 PoE+ ports, 4 10 Gig SFP+, AC 110/220V)
S1720-52GWR-4P (48 Ethernet 10/100/1000 ports, 4 Gig SFP, AC 110/220V)
S1720-52GWR-4X (48 Ethernet 10/100/1000 ports, 4 10 Gig SFP+, AC 110/220V)
S1720-52GWR-PWR-4P (48 Ethernet 10/100/1000 PoE+ ports, 4 Gig SFP, AC 110/220V)



## Product Description

S1720-52GWR-PWR-4X(48 Ethernet 10/100/1000 PoE+ ports,4 10 Gig SFP+, AC 110/220V)
S1720-28GWR-PWR-4TP(8 Ethernet 10/100/1000 PoE+,16 Ethernet 10/100/1000,4 Gig SFP and 2 combo 10/100/1000Base-T Ethernet ports, AC 100/220V)
S1700-28FR-2T2P-AC (24 Ethernet 10/100 ports, 2 Ethernet 10/100/1000 ports and 2 Gig SFP,AC 110/220V)
S1700-28GFR-4P-AC (24 Ethernet 10/100 ports, 4 Gig SFP, AC 110/220V)
S1700-52R-2T2P-AC (48 Ethernet 10/100 ports, 2 Ethernet 10/100/1000 ports and 2 Gig SFP,AC 110/220V)
S1700-52FR-2T2P-AC (48 Ethernet 10/100 ports, 2 Ethernet 10/100/1000 ports and 2 Gig SFP,AC 110/220V)
S1700-52GFR-4P-AC (48 Ethernet 10/100/1000 ports, 4 Gig SFP, AC 110/220V)
S1720-20GFR-4TP (16 Ethernet 10/100/1000 ports, 2 Gig SFP ports, 4 Gig SFP and 2 combo 10/100/1000Base-T Ethernet ports, AC 110/220V)
S1720-28GFR-4TP (24 Ethernet 10/100/1000 ports, 2 Gig SFP ports, 4 Gig SFP and 2 combo 10/100/1000Base-T Ethernet ports, AC 110/220V)
S1720-10GW-2P-E(8 Ethernet 10/100/1000 ports,2 Gig SFP, AC 110/220V)
S1720-10GW-PWR-2P-E(8 Ethernet 10/100/1000 PoE+ ports,2 Gig SFP, AC 110/220V)
S1720-28GWR-4P-E(24 Ethernet 10/100/1000 ports,4 Gig SFP, AC 110/220V)
S1720-28GWR-4X-E(24 Ethernet 10/100/1000 ports,4 10 Gig SFP+, AC 110/220V)
S1720-28GWR-PWR-4P-E(24 Ethernet 10/100/1000 PoE+ ports,4 Gig SFP, AC 110/220V)
S1720-28GWR-PWR-4X-E(24 Ethernet 10/100/1000 PoE+ ports,4 10 Gig SFP+, AC 110/220V)
S1720-52GWR-4P-E(48 Ethernet 10/100/1000 ports,4 Gig SFP, AC 110/220V)
S1720-52GWR-4X-E(48 Ethernet 10/100/1000 ports,4 10 Gig SFP+, AC 110/220V)
S1720-52GWR-PWR-4P-E(48 Ethernet 10/100/1000 PoE+ ports,4 Gig SFP, AC 110/220V)
S1720-52GWR-PWR-4X-E(48 Ethernet 10/100/1000 PoE+ ports,4 10 Gig SFP+, AC 110/220V)
S1720-28GWR-PWR-4TP-E(8 Ethernet 10/100/1000 PoE+,16 Ethernet 10/100/1000, 4 Gig SFP ports, 2 combo 10/100/1000Base-T Ethernet ports, AC 110/220V)

For more information, visit <http://e.huawei.com/en> or contact the Huawei local sales office.

**Copyright © Huawei Technologies Co., Ltd. 2017. All rights reserved.**

No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of Huawei Technologies Co., Ltd.

#### **Trademark Notice**



, HUAWEI, and  are trademarks or registered trademarks of Huawei Technologies Co., Ltd.

Other trademarks, product, service and company names mentioned are the property of their respective owners.

#### **General Disclaimer**

The information in this document may contain predictive statements including, without limitation, statements regarding the future financial and operating results, future product portfolio, new technology, etc. There are a number of factors that could cause actual results and developments to differ materially from those expressed or implied in the predictive statements. Therefore, such information is provided for reference purpose only and constitutes neither an offer nor an acceptance. Huawei may change the information at any time without notice.

HUAWEI TECHNOLOGIES CO.,LTD.  
Huawei Industrial Base  
Bantian Longgang  
Shenzhen 518129,P.R.China  
Tel: +86 755 28780808

[www.huawei.com](http://www.huawei.com)