


Introduction

EZVIZ products have been designed for your entertainment, communication and security. When you install the EZVIZ APP on your smartphone or tablet, EZVIZ devices will connect to the cloud via their QR code. With EZVIZ Husky you can keep an eye on your home and surroundings.

Main Features

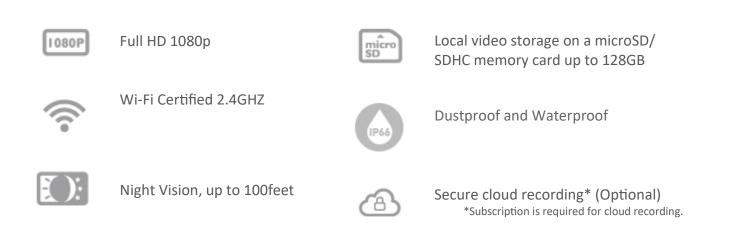

Dimensions





Specifications

Model1080P Wi-Fi + PoE Outdoor Bullet Cloud CameraCameraImage sensor1/2.7"Progressive Scan CMOSMinimum Illumination0.02Lux @ (F.2., AGC ON), 0 Lux with IRShutter1/30s to 1/100,000sLensMmm @ F2.2Horizontal View Angle: 90°, Diagonal View Angle: 107.5°Lens MountM12Day & NightIR cut filterDNR3D DNRIR RangeUp to 100 feet (30m)WDRUp to 100 feet (30m)WDRHDR, Max. 120dbCompressionH.264 Main ProfileVideo CompressionH.264 Main ProfileVideo Bit RateAdaptive bit rateAudio Bit RateUp to 30fps, AdaptiveImageImageTarase Solution1920 x 1080Frame RateUp to 30fps, AdaptiveNetworkSmart motion detectionOne-key configurationSmart motion detectionOne-key configurationSmart motion detectionInterface ProtocolEZVIZ Cloud Proprietary ProtocolGeneral FunctionDual-stream, Mirror imageNetwork Interface12-K12, S02.11n, S03.11n,		CS-CV210
Image sensor1/2.7"Progressive Scan CMOSMinimum Illumination0.02Lux @ (F2.2, AGC ON), 0 Lux with IRShutter1/30s to 1/100,000sLensMm @ F2.2Horizontal View Angle: 90°, Diagonal View Angle: 107.5°Lens MountM12Day & NightIR cut filterDNR3D DNRUp to 100 feet (30m)WURWDRUp to 100 feet (30m)WDRHDR, Max. 120dbCompressionH.264 Main ProfileVideo CompressionH.264 Main ProfileVideo Bit RateAdaptive bit rateImageHorizontal View Angle: 90°, Adaptive bit rate.Audio Bit RateUp to 30fps, AdaptiveMax. Resolution1920 x 1080Frame RateUp to 30fps, AdaptiveNetworkEZVIZ Cloud Proprietary ProtocolGeneral FunctionSuport microSD card (≤ 128 GB)Smart AlarmSmart Config (Wi-Fi one-key configuration)Interface ProtocolEZVIZ Cloud Proprietary ProtocolGeneral FunctionDual-stream, Mirror imageNetwork Interface1*R145 10M/100M Self-Adaptive Ethernet PortVireless parameters24 GHz to 2.4835 GHzChannel BandwidthSuport 20MHzSecurity64/128-bit WEP, WPA/WPA2, WPA-PSK/WPA2-PSKTransmission Rate802.11b: 11Mbps, 802.11g: 54Mbps, 802.11n: 150MbpsGeneral-22°F to 140 °F (-30°C ~ 60°C), Humidity 95% or less (non-condensing)Power Consumption12VDC ± 10%, 6W Maximum/Support POE (802.3af)Operating Conditions620°C 1, 10%, 6W Maximum/Support POE, 802.3af)<	Model	1080P Wi-Fi + PoE Outdoor Bullet Cloud Camera
Minimum Illumination0.02Lux @ (F2.2, AGC ON), 0 Lux with IRShutter1/30s to 1/100,000sLensAmm @ F2.2 Horizontal View Angle: 90°, Diagonal View Angle: 107.5°Lens MountM12Day & NightIR cut filterDNR3D DNRIR RangeUp to 100 feet (30m)WDRHDR, Max. 120dbCompressionH.264 Main ProfileVideo GmpressionH.264 Main ProfileVideo Bit RateHI-Def, Standard, and Basic . Adaptive bit rate.Audio Bit RateJop 20 x 1080Frame RateUp to 30fps, AdaptiveVorteorkSupport microSD card (< 128 GB)	Camera	
Shutter1/30s to 1/100,000sLens4mm @ F2.2 Horizontal View Angle: 90°, Diagonal View Angle: 107.5°Lens MountM12Day & NightIR cut filterDNR3D DNRIR RangeUp to 100 feet (30m)WDRHDR, Max. 120dbCompressionVideo CompressionH.264 Main ProfileVideo Bit RateAdaptive bit rate.Audio Bit RateAdaptive bit rateImageUp to 30fps, AdaptiveMax. Resolution1920 x 1080Frame RateUp to 30fps, AdaptiveNetworkSmart Config (Wi-Fi one-key configuration)Interface ProtocolEZVIZ Cloud Proprietary ProtocolGeneral FunctionDual-stream, Mirror imageNetwork Interface1*A 10M/100M Self-Adaptive Ethernet PortWireless parametersSupport 20MHzStandardIEEE802.11b, 802.11g, 802.11nFrequency Range2.4 GHz to 2.4835 GHzChannel BandwidthSupport 20MHzSecurity64/128-bit WEP, WPA/WPA2, WPA-PSK/WPA2-PSKTransmission Rate22°F to 140°F (-30°C ~ 60°C), Humidity 95% or less (non-condensing)Power Consumption12VDC ± 10%, 6W Maximum/Support PoE (802.3af)Pinensions (inch)6x1*3.28*2.75"(173mm*83.5mm*69.8mm)	Image sensor	1/2.7"Progressive Scan CMOS
LensAmm @ F2.2 Horizontal View Angle: 90°, Diagonal View Angle: 107.5°Lens MountM12Day & NightIR cut filterDay & NightIR cut filterDNRBD DNRIR RangeUp to 100 feet (30m)WDRHDR, Max. 120dbCompressionVideo CompressionH.264 Main ProfileVideo Bit RateAdaptive bit rateAudio Bit RateAdaptive bit rateAudio Bit RateUp to 300Max. ResolutionUp to 306ps, AdaptiveFrame RateUp to 30fps, AdaptiveNetworkSmart AlarmStorageSupport microSD card (\$ 128 GB)Smart AlarmSmart Motion detectionOne-key configurationSmart Config (Wi-Fi one-key configuration)Interface ProtocolEZVIZ Cloud Proprietary ProtocolGeneral FunctionDual-stream, Mirror imageNetwork Interface2.4 GHz to 2.4335 GHzStandardSupport 20MHzSecurity64/128-bit WEP, WPA/WPA2, WPA-PSK/WPA2-PSKStandardSupport 20HzGeneralSupport 20HzSecurity522°F to 140 °F (-30°C ~ 60°C), Humidity 95% or less (non-condensing)Power Consumption12VPC ± 10%, 6W Maximum/Support PoE (802.3af)Dimensions (inch)6.81*3.28*2.75"(173mm*83.5mm*69.8mm)	Minimum Illumination	0.02Lux @ (F2.2, AGC ON) , 0 Lux with IR
LensHorizontal View Angle: 90°, Diagonal View Angle: 107.5°Lens MountM12Day & NightIR cut filterDNR3D DNRBRangeUp to 100 feet (30m)WDRHDR, Max. 120dbCompressionVideo CompressionVideo Bit RateHi-Def, Standard, and Basic . Adaptive bit rate.Audio Bit RateHi-Def, Standard, and Basic . Adaptive bit rate.Audio Bit RateJ920 x 1080Frame RateUp to 30fbs, AdaptiveNetworkUp to 30fbs, AdaptiveStorageSupport microSD card (\$ 128 GB)Smart AlarmSmart Motion detectionOne-key configurationSmart Config (Wi-Fi one-key configuration)Interface ProtocolEZVIZ Cloud Proprietary ProtocolGeneral FunctionDual stream, Mirror imageNetwork Interface2.4 GHz to 2.4835 GHzStandardSupport 20MHzSecurity64/128-bit WEP, WPA/WPA2, WPA-PSK/WPA2-PSKStandardSupport 20MHzSecurity64/212-bit WEP, WPA/WPA2, WPA-PSK/WPA2-PSKGeneralConditions-22°F to 140 °F (-30°C ~ 60°C), Humidity 95% or less (non-condensing)Power Consumption12VDC ± 10%, KW Maximum/Support PoE (802.3af)Power Consumption12VDC ± 10%, KW Maximum/Support PoE (802.3af)Power Consumption12VDC ± 10%, KW Maximum/Support PoE (802.3af)	Shutter	1/30s to 1/100,000s
Day & NightIR cut filterDNR3D DNRIR RangeUp to 100 feet (30m)WDRHDR, Max. 120dbCompressionH.264 Main ProfileVideo CompressionH.264 Main ProfileVideo Bit RateHi-Def, Standard, and Basic . Adaptive bit rate.Audio Bit RateAdaptive bit rateImageVideo 30fps, AdaptiveMax. Resolution1920 x 1080Frame RateUp to 30fps, AdaptiveNetworkSupport microSD card (≤ 128 GB)Smart AlarmSmart motion detectionOne-key configurationSmart Config (Wi-Fi one-key configuration)Interface ProtocolEZVIZ Cloud Proprietary ProtocolGeneral FunctionDual-stream, Mirror imageNetwork Interface1*R145 10M/100M Self-Adaptive Ethernet PortWireless parametersSupport 20MHzStoargeSupport 20MHzSecurity64/128-bit WEP, WPA/WPA2, WPA-PSK/WPA2-PSKGeneralSupport 20MHzSecurity62/128-bit WEP, WPA/WPA2, MPA-PSK/WPA2-PSKOperating Conditions-22°F to 140°F (-3°°C ~ 60°C), Humidity 95% or less (non-condensing)Power Consumption12VDC ± 10%, 6W Maximum/Support PoE (802.3af)Dimension (inch)6.81*3.28*2.75"(173mm*83.5mm*69.8mm)	Lens	-
DNR3D DNRIR RangeUp to 100 feet (30m)WDRHDR, Max. 120dbCompressionVideo CompressionH.264 Main ProfileVideo Bit RateHi-Def, Standard, and Basic . Adaptive bit rate.Audio Bit RateAdaptive bit rateImageMax. Resolution1920 x 1080Frame RateVideo KorkovUp to 30fps, AdaptiveNetworkSupport microSD card (≤ 128 GB)Smart AlarmSmart motion detectionOne-key configurationSmart Mirror imageInterface ProtocolEZVIZ Cloud Proprietary ProtocolGeneral FunctionDual-stream, Mirror imageNetwork Interface1*R145 10M/100M Self-Adaptive Ethernet PortWireless parametersSupport 20MHzStandardIEEE802.11b, 802.11g, 802.11nFrequency Range2.4 GHz to 2.4835 GHzChannel BandwidthSupport 20MHzSecurity64/128-bit WEP, WPA/WPA2, WPA-PSK/WPA2-PSKGeneral-22°F to 140°F (-30°C ~ 60°C), Humidity 95% or less (non-condensing)Power Consumption12VDC ± 10%, GW Maximum/Support PoE (802.3af)Dimension (inch)6.81*3.28*2.75"(173mm*83.5mm*69.8mm)	Lens Mount	M12
IR RangeUp to 100 feet (30m)WDRHDR, Max. 120dbCompressionHDR, Max. 120dbVideo CompressionH.264 Main ProfileVideo Bit RateHi-Def, Standard, and Basic . Adaptive bit rate.Audio Bit RateAdaptive bit rateAudio Bit RateUp to 50 fps, AdaptiveMax. Resolution1920 x 1080Frame RateUp to 30 fps, AdaptiveNetworkStorageStorageSupport microSD card (≤ 128 GB)Smart AlarmSmart Motion detectionOne-key configurationSmartConfig (Wi-Fi one-key configuration)Interface ProtocolEZVIZ Cloud Proprietary ProtocolGeneral FunctionDual-stream, Mirror imageNetwork Interface18145 10M/100M Self-Adaptive Ethernet PortWireless parametersSuport 20MHzStandardIEEE802.11b, 802.11g, 802.11nFrequency Range2.4 GHz to 2.4835 GHzChannel BandwidthSupport 20MHzSecurity64/128-bit WEP, WPA/WPA2, WPA-PSK/WPA2-PSKTransmission Rate802.11b: 11Mbps, 802.11g: 54Mbps, 802.11n: 150MbpsGeneral-22*F to 140 *F (-30°C ~ 60°C), Humidity 95% or less (non-condensing)Power Consumption12VDC ± 10%, 6W Maximum/Support PoE (802.3af)Operating Conditions-22*F to 140 *F (-30°C ~ 60°C), Humidity 95% or less (non-condensing)Power Consumption12VDC ± 10%, 6W Maximum/Support PoE (802.3af)Operating Conditions-62*F to 140 *F (-30°C ~ 60°C), Humidity 95% or less (non-condensing)	Day & Night	IR cut filter
WDRHDR, Max. 120dbCompressionH.264 Main ProfileVideo CompressionH.264 Main ProfileVideo Bit RateHi-Def, Standard, and Basic . Adaptive bit rate.Audio Bit RateAdaptive bit rateImageImageMax. Resolution1920 x 1080Frame RateUp to 30fps, AdaptiveNetworkStorageStorageSupport microSD card (≤ 128 GB)Smart AlarmSmart Motion detectionOne-key configurationSmart Config (Wi-Fi one-key configuration)Interface ProtocolEZVIZ Cloud Proprietary ProtocolGeneral FunctionDual-stream, Mirror imageNetwork Interface1*RJ45 10M/100M SelF-Adaptive Ethernet PortVireless parametersStandardEteE802.11b, 802.11g, 802.11nFrequency Range2.4 GHz to 2.4835 GHzChannel BandwidthSupport 20MHzSecurity64/128-bit WEP, WPA/WPA2, WPA-PSK/WPA2-PSKTransmission Rate802.11b: 11Mbps, 802.11g: 54Mbps, 802.11n: 150MbpsGeneral-22°F to 140 °F (-30°C ~ 60°C), Humidity 95% or less (non-condensing)Power Consumption12VDC ± 10%, 6W Maximum/Support PoE (802.3af)Operating Conditions-22°F to 140 °F (-30°C ~ 60°C), Humidity 95% or less (non-condensing)Power Consumption12VDC ± 10%, 6W Maximum/Support PoE (802.3af)Operating Conditions-62°F to 140 °F (-30°C ~ 60°C), Humidity 95% or less (non-condensing)	DNR	3D DNR
CompressionVideo CompressionH.264 Main ProfileVideo Bit RateHi-Def, Standard, and Basic . Adaptive bit rate.Audio Bit RateAdaptive bit rateImageImageMax. Resolution1920 x 1080Frame RateUp to 30fps, AdaptiveNetworkSupport microSD card (≤ 128 GB)Smart AlarmSmart motion detectionOne-key configurationSmart Config (Wi-Fi one-key configuration)Interface ProtocolEZVIZ Cloud Proprietary ProtocolGeneral FunctionDual-stream, Mirror imageNetwork Interface1*RI45 10M/100M Self-Adaptive Ethernet PortWireless parametersSupport 20MHzStandardIEEE802.11b, 802.11g, 802.11nFrequency Range2.4 GHz to 2.4835 GHzChannel BandwidthSupport 20MHzSecurity64/128-bit WEP, WPA/WPA2, WPA-PSK/WPA2-PSKTransmission Rate302.11b: 11Mbps, 802.11g: 54Mbps, 802.11n: 150MbpsGeneral-22°F to 140°F (-30°C ~ 60°C), Humidity 95% or less (non-condensing)Power Consumption12VDC ± 10%, 6W Maximum/Support PoE (802.3af)Onensions (inch)6.81*3.28*2.75"(173mm*83.5mm*69.8mm)	IR Range	Up to 100 feet (30m)
Video CompressionH.264 Main ProfileVideo Bit RateHi-Def, Standard, and Basic . Adaptive bit rate.Audio Bit RateAdaptive bit rateAudio Bit RateAdaptive bit rateImage1920 x 1080Frame RateUp to 30fps, AdaptiveNetworkSupport microSD card (≤ 128 GB)Smart AlarmSmart motion detectionOne-key configurationSmartConfig (Wi-Fi one-key configuration)Interface ProtocolEZVIZ Cloud Proprietary ProtocolGeneral FunctionDual-stream, Mirror imageNetwork Interface1*BJ45 10M/100M Self-Adaptive Ethernet PortWireless parametersSupport 20MHzStandardIEEE802.11b, 802.11g, 802.11nFrequency Range2.4 GHz to 2.4835 GHzChannel BandwidthSupport 20MHzSecurity64/128-bit WEP, WPA/WPA2, WPA-PSK/WPA2-PSKTransmission Rate22°F to 140°F (-30°C ~ 60°C), Humidity 95% or less (non-condensing)Power Consumption12VDC ± 10%, 6W Maximum/Support PoE (802.3af)Dimensions (inch)6.81*3.28*2.75" (173mm*83.5mm*69.8mm)	WDR	HDR, Max. 120db
Video Bit RateHi-Def, Standard, and Basic . Adaptive bit rate.Audio Bit RateAdaptive bit rateImageImageMax. Resolution1920 x 1080Frame RateUp to 30fps, AdaptiveNetworkImageStorageSupport microSD card (≤ 128 GB)Smart AlarmSmart motion detectionOne-key configurationSmartConfig (Wi-Fi one-key configuration)Interface ProtocolEZVIZ Cloud Proprietary ProtocolGeneral FunctionDual-stream, Mirror imageNetwork Interface1*RI45 10M/100M Self-Adaptive Ethernet PortWireless parametersIteEE802.11b, 802.11g, 802.11nFrequency Range2.4 GHz to 2.4835 GHzChannel BandwidthSupport 20MHzSecurity64/128-bit WEP, WPA/WPA2, WPA-PSK/WPA2-PSKTransmission Rate-22°F to 140°F (-30°C ~ 60°C), Humidity 95% or less (non-condensing)Power Consumption12VDC ± 10%, 6W Maximum/Support PoE (802.3af)Dimensions (inch)6.81*3.28*2.75" (173mm*83.5mm*69.8mm)	Compression	
Audio Bit Rate Adaptive bit rate Image	Video Compression	H.264 Main Profile
ImageMax. Resolution1920 x 1080Frame RateUp to 30fps, AdaptiveNetworkStorageSupport microSD card (≤ 128 GB)Smart AlarmSmart motion detectionOne-key configurationSmart Config (Wi-Fi one-key configuration)Interface ProtocolEZVIZ Cloud Proprietary ProtocolGeneral FunctionDual-stream, Mirror imageNetwork Interface1*RJ45 10M/100M Self-Adaptive Ethernet PortWireless parametersStandardIEEE802.11b, 802.11g, 802.11nFrequency Range2.4 GHz to 2.4835 GHzChannel BandwidthSupport 20MHzSecurity64/128-bit WEP, WPA/WPA2, WPA-PSK/WPA2-PSKTransmission Rates02.11b: 11Mbps, 802.11g: 54Mbps, 802.11n: 150MbpsGeneral-22°F to 140°F (-30°C ~ 60°C), Humidity 95% or less (non-condensing)Power Consumption12VDC ± 10%, 6W Maximum/Support PoE (802.3af)Dimensions (inch)6.81*3.28*2.75"(173mm*83.5mm*69.8mm)	Video Bit Rate	Hi-Def, Standard, and Basic . Adaptive bit rate.
Max. Resolution1920 x 1080Frame RateUp to 30fps, AdaptiveNetworkStorageSupport microSD card (≤ 128 GB)Smart AlarmSmart motion detectionOne-key configurationSmart Config (Wi-Fi one-key configuration)Interface ProtocolEZVIZ Cloud Proprietary ProtocolGeneral FunctionDual-stream, Mirror imageNetwork Interface1*RJ45 10M/100M Self-Adaptive Ethernet PortWireless parametersStandardIEEE802.11b, 802.11g, 802.11nFrequency Range2.4 GHz to 2.4835 GHzChannel BandwidthSupport 20MHzSecurity64/128-bit WEP, WPA/WPA2, WPA-PSK/WPA2-PSKGeneral-22°F to 140°F (-30°C ~ 60°C), Humidity 95% or less (non-condensing)Power Consumption12VDC ± 10%, 6W Maximum/Support PoE (802.3af)Dimensions (inch)6.81*3.28*2.75"(173mm*83.5mm*69.8mm)	Audio Bit Rate	Adaptive bit rate
Frame RateUp to 30fps, AdaptiveNetworkStorageSupport microSD card (≤ 128 GB)Smart AlarmSmart motion detectionOne-key configurationSmart Config (Wi-Fi one-key configuration)Interface ProtocolEZVIZ Cloud Proprietary ProtocolGeneral FunctionDual-stream, Mirror imageNetwork Interface1*RJ45 10M/100M Self-Adaptive Ethernet PortWireless parametersEEE802.11b, 802.11g, 802.11nFrequency Range2.4 GHz to 2.4835 GHzChannel BandwidthSupport 20MHzSecurity64/128-bit WEP, WPA/WPA2, WPA-PSK/WPA2-PSKTransmission Rate22°F to 140 °F (-30°C ~ 60°C), Humidity 95% or less (non-condensing)Power Consumption12VDC ± 10%, 6W Maximum/Support PoE (802.3af)Dimensions (inch)6.81*3.28*2.75"(173mm*83.5mm*69.8mm)	Image	
Network Storage Support microSD card (≤ 128 GB) Smart Alarm Smart motion detection One-key configuration SmartConfig (Wi-Fi one-key configuration) Interface Protocol EZVIZ Cloud Proprietary Protocol General Function Dual-stream, Mirror image Network Interface 1*RJ45 10M/100M Self-Adaptive Ethernet Port Wireless parameters 1*RI45 10M/100M Self-Adaptive Ethernet Port Standard IEEE802.11b, 802.11g, 802.11n Frequency Range 2.4 GHz to 2.4835 GHz Channel Bandwidth Support 20MHz Security 64/128-bit WEP, WPA/WPA2, WPA-PSK/WPA2-PSK Transmission Rate 802.11b: 11Mbps, 802.11g: 54Mbps, 802.11n: 150Mbps General -22°F to 140°F (-30°C ~ 60°C), Humidity 95% or less (non-condensing) Power Consumption 12VDC ± 10%, 6W Maximum/Support PoE (802.3af) Dimensions (inch) 6.81*3.28*2.75"(173mm*83.5mm*69.8mm)	Max. Resolution	1920 x 1080
StorageSupport microSD card (≤ 128 GB)Smart AlarmSmart motion detectionOne-key configurationSmart Config (Wi-Fi one-key configuration)Interface ProtocolEZVIZ Cloud Proprietary ProtocolGeneral FunctionDual-stream, Mirror imageNetwork Interface1*RJ45 10M/100M Self-Adaptive Ethernet PortWireless parametersStandardStandardIEEE802.11b, 802.11g, 802.11nFrequency Range2.4 GHz to 2.4835 GHzChannel BandwidthSupport 20MHzSecurity64/128-bit WEP, WPA/WPA2, WPA-PSK/WPA2-PSKGeneral-22°F to 140 °F (-30°C ~ 60°C), Humidity 95% or less (non-condensing)Power Consumption12VDC ± 10%, 6W Maximum/Support PoE (802.3af)Dimensions (inch)6.81*3.28*2.75"(173mm*83.5mm*69.8mm)	Frame Rate	Up to 30fps, Adaptive
Smart AlarmSmart motion detectionOne-key configurationSmart Config (Wi-Fi one-key configuration)Interface ProtocolEZVIZ Cloud Proprietary ProtocolGeneral FunctionDual-stream, Mirror imageNetwork Interface1*RJ45 10M/100M Self-Adaptive Ethernet PortWireless parametersEEE802.11b, 802.11g, 802.11nStandardIEEE802.11b, 802.11g, 802.11nFrequency Range2.4 GHz to 2.4835 GHzChannel BandwidthSupport 20MHzSecurity64/128-bit WEP, WPA/WPA2, WPA-PSK/WPA2-PSKTransmission Rate802.11b: 11Mbps, 802.11g: 54Mbps, 802.11n: 150MbpsGeneral-22°F to 140°F (-30°C ~ 60°C), Humidity 95% or less (non-condensing)Power Consumption12VDC ± 10%, 6W Maximum/Support PoE (802.3af)Dimensions (inch)6.81*3.28*2.75"(173mm*83.5mm*69.8mm)	Network	
One-key configurationSmartConfig (Wi-Fi one-key configuration)Interface ProtocolEZVIZ Cloud Proprietary ProtocolGeneral FunctionDual-stream, Mirror imageNetwork Interface1*RJ45 10M/100M Self-Adaptive Ethernet PortWireless parametersEEE802.11b, 802.11g, 802.11nStandardIEEE802.11b, 802.11g, 802.11nFrequency Range2.4 GHz to 2.4835 GHzChannel BandwidthSupport 20MHzSecurity64/128-bit WEP, WPA/WPA2, WPA-PSK/WPA2-PSKTransmission Rate802.11b: 11Mbps, 802.11g: 54Mbps, 802.11n: 150MbpsGeneral-22°F to 140°F (-30°C ~ 60°C), Humidity 95% or less (non-condensing)Power Consumption12VDC ± 10%, 6W Maximum/Support PoE (802.3af)Dimensions (inch)6.81*3.28*2.75"(173mm*83.5mm*69.8mm)	Storage	Support microSD card (≤ 128 GB)
Interface ProtocolEZVIZ Cloud Proprietary ProtocolGeneral FunctionDual-stream, Mirror imageNetwork Interface1*RJ45 10M/100M Self-Adaptive Ethernet PortWireless parametersStandardIEEE802.11b, 802.11g, 802.11nFrequency Range2.4 GHz to 2.4835 GHzChannel BandwidthSupport 20MHzSecurity64/128-bit WEP, WPA/WPA2, WPA-PSK/WPA2-PSKTransmission Rate802.11b: 11Mbps, 802.11g: 54Mbps, 802.11n: 150MbpsGeneral-22°F to 140 °F (-30°C ~ 60°C), Humidity 95% or less (non-condensing)Power Consumption12VDC ± 10%, 6W Maximum/Support PoE (802.3af)Dimensions (inch)6.81*3.28*2.75"(173mm*83.5mm*69.8mm)	Smart Alarm	Smart motion detection
General FunctionDual-stream, Mirror imageNetwork Interface1*RJ45 10M/100M Self-Adaptive Ethernet PortWireless parametersStandardIEEE802.11b, 802.11g, 802.11nFrequency Range2.4 GHz to 2.4835 GHzChannel BandwidthSupport 20MHzSecurity64/128-bit WEP, WPA/WPA2, WPA-PSK/WPA2-PSKTransmission Rate802.11b: 11Mbps, 802.11g: 54Mbps, 802.11n: 150MbpsGeneral-22°F to 140°F (-30°C ~ 60°C), Humidity 95% or less (non-condensing)Power Consumption12VDC ± 10%, 6W Maximum/Support PoE (802.3af)Dimensions (inch)6.81*3.28*2.75"(173mm*83.5mm*69.8mm)	One-key configuration	SmartConfig (Wi-Fi one-key configuration)
Network Interface1*RJ45 10M/100M Self-Adaptive Ethernet PortWireless parametersStandardIEEE802.11b, 802.11g, 802.11nFrequency Range2.4 GHz to 2.4835 GHzChannel BandwidthSupport 20MHzSecurity64/128-bit WEP, WPA/WPA2, WPA-PSK/WPA2-PSKTransmission Rate802.11b: 11Mbps, 802.11g: 54Mbps, 802.11n: 150MbpsGeneral-22°F to 140°F (-30°C ~ 60°C), Humidity 95% or less (non-condensing)Power Consumption12VDC ± 10%, 6W Maximum/Support PoE (802.3af)Dimensions (inch)6.81*3.28*2.75"(173mm*83.5mm*69.8mm)	Interface Protocol	EZVIZ Cloud Proprietary Protocol
Wireless parametersStandardIEEE802.11b, 802.11g, 802.11nFrequency Range2.4 GHz to 2.4835 GHzChannel BandwidthSupport 20MHzSecurity64/128-bit WEP, WPA/WPA2, WPA-PSK/WPA2-PSKTransmission Rate802.11b: 11Mbps, 802.11g: 54Mbps, 802.11n: 150MbpsGeneral-22°F to 140°F (-30°C ~ 60°C), Humidity 95% or less (non-condensing)Power Consumption12VDC ± 10%, 6W Maximum/Support PoE (802.3af)Dimensions (inch)6.81*3.28*2.75"(173mm*83.5mm*69.8mm)	General Function	Dual-stream, Mirror image
StandardIEEE802.11b, 802.11g, 802.11nFrequency Range2.4 GHz to 2.4835 GHzChannel BandwidthSupport 20MHzSecurity64/128-bit WEP, WPA/WPA2, WPA-PSK/WPA2-PSKTransmission Rate802.11b: 11Mbps, 802.11g: 54Mbps, 802.11n: 150MbpsGeneral	Network Interface	1*RJ45 10M/100M Self-Adaptive Ethernet Port
Frequency Range2.4 GHz to 2.4835 GHzChannel BandwidthSupport 20MHzSecurity64/128-bit WEP, WPA/WPA2, WPA-PSK/WPA2-PSKTransmission Rate802.11b: 11Mbps, 802.11g: 54Mbps, 802.11n: 150MbpsGeneral-22°F to 140°F (-30°C ~ 60°C), Humidity 95% or less (non-condensing)Power Consumption12VDC ± 10%, 6W Maximum/Support PoE (802.3af)Dimensions (inch)6.81*3.28*2.75"(173mm*83.5mm*69.8mm)	Wireless parameters	
Channel BandwidthSupport 20MHzSecurity64/128-bit WEP, WPA/WPA2, WPA-PSK/WPA2-PSKTransmission Rate802.11b: 11Mbps, 802.11g: 54Mbps, 802.11n: 150MbpsGeneral-22°F to 140 °F (-30°C ~ 60°C), Humidity 95% or less (non-condensing)Power Consumption12VDC ± 10%, 6W Maximum/Support PoE (802.3af)Dimensions (inch)6.81*3.28*2.75"(173mm*83.5mm*69.8mm)	Standard	IEEE802.11b, 802.11g, 802.11n
Security64/128-bit WEP, WPA/WPA2, WPA-PSK/WPA2-PSKTransmission Rate802.11b: 11Mbps, 802.11g: 54Mbps, 802.11n: 150MbpsGeneral-22°F to 140 °F (-30°C ~ 60°C), Humidity 95% or less (non-condensing)Power Consumption-22°F to 140 °F (-30°C ~ 60°C), Humidity 95% or less (non-condensing)Dimensions (inch)6.81*3.28*2.75"(173mm*83.5mm*69.8mm)		2.4 GHz to 2.4835 GHz
Transmission Rate802.11b: 11Mbps, 802.11g: 54Mbps, 802.11n: 150MbpsGeneral-22°F to 140 °F (-30°C ~ 60°C), Humidity 95% or less (non-condensing)Power Consumption12VDC ± 10%, 6W Maximum/Support PoE (802.3af)Dimensions (inch)6.81*3.28*2.75"(173mm*83.5mm*69.8mm)	Channel Bandwidth	Support 20MHz
GeneralOperating Conditions-22°F to 140 °F (-30°C ~ 60°C), Humidity 95% or less (non-condensing)Power Consumption12VDC ± 10%, 6W Maximum/Support PoE (802.3af)Dimensions (inch)6.81*3.28*2.75"(173mm*83.5mm*69.8mm)	-	
Operating Conditions-22°F to 140 °F (-30°C ~ 60°C), Humidity 95% or less (non-condensing)Power Consumption12VDC ± 10%, 6W Maximum/Support PoE (802.3af)Dimensions (inch)6.81*3.28*2.75"(173mm*83.5mm*69.8mm)	Transmission Rate	802.11b: 11Mbps, 802.11g: 54Mbps, 802.11n: 150Mbps
condensing) Power Consumption 12VDC ± 10%, 6W Maximum/Support PoE (802.3af) Dimensions (inch) 6.81*3.28*2.75"(173mm*83.5mm*69.8mm)		
Dimensions (inch) 6.81*3.28*2.75"(173mm*83.5mm*69.8mm)	Operating Conditions	
0.01 5.28 2.75 (1751111 05.51111 05.61111)	Power Consumption	12VDC ± 10%, 6W Maximum/Support PoE (802.3af)
Weight 0.73 lb (331 g)	Dimensions (inch)	6.81*3.28*2.75"(173mm*83.5mm*69.8mm)
	Weight	0.73 lb (331 g)

