

ThinkSystem SR590 7X99A01NEA

Region
EET,MEA,RUCIS,WE

Power Supply
2x 750W Platinum

Machine Type
7X99

Warranty
3-year

TopSeller
No

Ann Date (mm/yy)
11/17

Processor
2x Xeon Silver 4114
10C/2.2GHz/13.75MB/85W/DDR4-2400

Memory
2x 32GB RDIMM DDR4-2666

Storage Controller
1x 430-16i

Disk Bays
16x2.5" HS (12 SATA/SAS, 4 AnyBay)

Disks
Open

M.2 Drives
None

Networking (LOM/ML2/PCIe)
None

Available PCIe Slots
5x PCIe x8, 1x PCIe x16

Front VGA
Front VGA

System Management
XClarity Enterprise

Note:

Country Code "US" is for United States, "++" is for EMEA countries (e.g. AD - Saudi, Arabia, AT - Austria, BM - Bulgaria, etc.), "xx" is for EAST countries (e.g. BM - Bulgaria, CX - Hungary, CY - Cyprus, etc.), and "***" is for MEA countries (e.g. AD - Saudi, Arabia, ED - Egypt, EQ - Sweden, etc.). Please be aware that the EMEA/ EAST/MEA models listed above might not be available in all countries



This publication was developed for products and services offered in the United States and E.M.E.A countries. Lenovo may not offer the products, services or features discussed in this document in other countries. Lenovo may withdraw an offering at any time. Information is subject to change without notice. Consult your local representative for information on offerings available in your area. Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. Lenovo provides this publication "as is" without warranty of any kind, either express or implied, including the implied warranties of merchantability or fitness for a particular purpose.



<http://psref.lenovo.com>

Visit psref website for the latest version of Product Specifications Reference.

© Lenovo, 2017. All rights reserved.




ThinkSystem SR590 Platform Specifications

Product Specifications Reference (PSREF)

Components	Specification																																																																																																						
Form factor	2U rack																																																																																																						
Dimensions	Height: 86.5 mm (3.4 in). Width: 482 mm (19.0 in) with rack latches. Depth: 763.7 mm (30.1 in)																																																																																																						
Weight	Maximum configuration: 61.7 lb (28 kg)																																																																																																						
Processor	Up to two 150W Intel Xeon Scalable family processors, Bronze, Silver, Gold, or Platinum. Up to 26 cores at 2.0GHz, up to 3.6GHz with 4 cores. Two processors are connected with two UPI (Ultra Path Interconnect) links up to 10.4GT/s each																																																																																																						
Chipset	Intel C622 Platform Controller Hub																																																																																																						
Memory	Up to 16 DIMM sockets. Each processor supports up to 8 DIMM sockets with 6 channels. DDR4-2666. RDIMMs and LRDIMMs are supported, but memory types cannot be intermixed																																																																																																						
Memory capacity	With RDIMMs: Up to 512GB with 16 x 32 GB RDIMMs and two processors With LRDIMMs: Up to 1TB with 16 x 64 GB LRDIMMs and two processors																																																																																																						
Memory protection	ECC, memory mirroring, and memory sparing																																																																																																						
Storage controllers	Supports the following RAID/HBA adapters:																																																																																																						
	<table><tr><th></th><th>RAID adapter</th><th>Interface</th><th>Drive type</th><th>RAID levels</th><th>JBOD</th><th>Cache</th><th>Cache protection</th><th>FastPath</th><th>Max qty</th></tr><tr><td rowspan="4">For SS bays</td><td>Onboard SATA</td><td>6Gb SATA</td><td>SATA</td><td>0/1/10/5</td><td>Yes</td><td>None</td><td>None</td><td>No</td><td>-</td></tr><tr><td>530-8i</td><td>12Gbs SAS</td><td>SATA/SAS</td><td>0/1/10/5/50</td><td>Yes</td><td>None</td><td>None</td><td>Yes</td><td>2</td></tr><tr><td>730-8i</td><td>12Gbs SAS</td><td>SATA/SAS</td><td>0/1/10/5/50</td><td>Yes</td><td>1GB</td><td>None</td><td>No</td><td>2</td></tr><tr><td>930-8i</td><td>12Gbs SAS</td><td>SATA/SAS</td><td>0/1/10/5/50/6/60</td><td>Yes</td><td>2GB</td><td>Flash backup</td><td>Yes</td><td>2</td></tr><tr><td rowspan="6">For HS bays</td><td>930-16i</td><td>12Gbs SAS</td><td>SATA/SAS</td><td>0/1/10/5/50/6/60</td><td>Yes</td><td>4GB</td><td>Flash backup</td><td>Yes</td><td>1</td></tr><tr><td>430-8i</td><td>12Gbs SAS</td><td>SATA/SAS</td><td>-</td><td>Yes</td><td>None</td><td>None</td><td>-</td><td>2</td></tr><tr><td>430-16i</td><td>12Gbs SAS</td><td>SATA/SAS</td><td>-</td><td>Yes</td><td>None</td><td>None</td><td>-</td><td>1</td></tr><tr><td>430-8e</td><td>12Gbs SAS</td><td>SATA/SAS</td><td>-</td><td>Yes</td><td>None</td><td>None</td><td>-</td><td>5</td></tr><tr><td>430-16e</td><td>12Gbs SAS</td><td>SATA/SAS</td><td>-</td><td>Yes</td><td>None</td><td>None</td><td>-</td><td>5</td></tr><tr><td>930-8e</td><td>12Gbs SAS</td><td>SATA/SAS</td><td>0/1/10/5/50/6/60</td><td>Yes</td><td>4GB</td><td>Flash backup</td><td>Yes</td><td>3</td></tr></table>		RAID adapter	Interface	Drive type	RAID levels	JBOD	Cache	Cache protection	FastPath	Max qty	For SS bays	Onboard SATA	6Gb SATA	SATA	0/1/10/5	Yes	None	None	No	-	530-8i	12Gbs SAS	SATA/SAS	0/1/10/5/50	Yes	None	None	Yes	2	730-8i	12Gbs SAS	SATA/SAS	0/1/10/5/50	Yes	1GB	None	No	2	930-8i	12Gbs SAS	SATA/SAS	0/1/10/5/50/6/60	Yes	2GB	Flash backup	Yes	2	For HS bays	930-16i	12Gbs SAS	SATA/SAS	0/1/10/5/50/6/60	Yes	4GB	Flash backup	Yes	1	430-8i	12Gbs SAS	SATA/SAS	-	Yes	None	None	-	2	430-16i	12Gbs SAS	SATA/SAS	-	Yes	None	None	-	1	430-8e	12Gbs SAS	SATA/SAS	-	Yes	None	None	-	5	430-16e	12Gbs SAS	SATA/SAS	-	Yes	None	None	-	5	930-8e	12Gbs SAS	SATA/SAS	0/1/10/5/50/6/60	Yes	4GB	Flash backup	Yes	3
		RAID adapter	Interface	Drive type	RAID levels	JBOD	Cache	Cache protection	FastPath	Max qty																																																																																													
	For SS bays	Onboard SATA	6Gb SATA	SATA	0/1/10/5	Yes	None	None	No	-																																																																																													
		530-8i	12Gbs SAS	SATA/SAS	0/1/10/5/50	Yes	None	None	Yes	2																																																																																													
		730-8i	12Gbs SAS	SATA/SAS	0/1/10/5/50	Yes	1GB	None	No	2																																																																																													
		930-8i	12Gbs SAS	SATA/SAS	0/1/10/5/50/6/60	Yes	2GB	Flash backup	Yes	2																																																																																													
	For HS bays	930-16i	12Gbs SAS	SATA/SAS	0/1/10/5/50/6/60	Yes	4GB	Flash backup	Yes	1																																																																																													
		430-8i	12Gbs SAS	SATA/SAS	-	Yes	None	None	-	2																																																																																													
		430-16i	12Gbs SAS	SATA/SAS	-	Yes	None	None	-	1																																																																																													
430-8e		12Gbs SAS	SATA/SAS	-	Yes	None	None	-	5																																																																																														
430-16e		12Gbs SAS	SATA/SAS	-	Yes	None	None	-	5																																																																																														
930-8e		12Gbs SAS	SATA/SAS	0/1/10/5/50/6/60	Yes	4GB	Flash backup	Yes	3																																																																																														
Note: 730-8i is available in China only																																																																																																							
Disk drive bays	Supports 3.5" Simple-swap bay up to 8, or 3.5" HS bay up to 12, or 2.5" HS bay up to 12. On 12x 3.5", 8x 2.5", or 16x 2.5" bay models, 4 bays can be upgrade to AnyBay. Optional 2 rear 3.5" HS bays are supported on 12 x 3.5" model, takes place in riser card 1 location. Optional one or two internal M.2 SSD for boot, dual M.2 SSD supports mirroring																																																																																																						
Internal storage	For 3.5" SS bay	3.5" HDD, SATA6Gbs, 7.2K	1TB/2TB/4TB/6TB/8TB																																																																																																				
		3.5" HDD, SATA6Gbs, 7.2K	1TB/2TB/4TB/6TB/8TB/10TB																																																																																																				
	For 3.5" bay (3.5" disks or 2.5" disks with 3.5" tray)	3.5" HDD, SAS12Gbs, 7.2K	1TB/2TB/4TB/6TB/10TB																																																																																																				
		3.5" HDD, SAS12Gbs, 15K	300GB/600GB/900GB																																																																																																				
		2.5" SSD, SATA6Gbs	240GB/480GB																																																																																																				
		2.5" NVMe SSD, AnyBay	960GB/1.92TB/3.84TB																																																																																																				
	For 2.5" bay	2.5" HDD, SATA6Gbs, 7.2K	1TB/2TB																																																																																																				
		2.5" HDD, SAS12Gbs, 7.2K	1TB/2TB																																																																																																				
		2.5" HDD, SAS12Gbs, 10K	300GB/600GB/900GB/1.2TB/1.8TB																																																																																																				
		2.5" HDD, SAS12Gbs, 10K, SED	300GB/600GB																																																																																																				
		2.5" HDD, SAS12Gbs, 15K	300GB/600GB/900GB																																																																																																				
2.5" SSD, SAS12Gbs		400GB/800GB/3.84TB																																																																																																					
2.5" SSD, SATA6Gbs		240GB/480GB																																																																																																					
	2.5" NVMe SSD, AnyBay	960GB/1.6TB/1.92TB/3.84TB																																																																																																					
M.2 boot drive	M.2 SATA SSD	32GB/128GB																																																																																																					
Optical	No internal optical bay. Using USB DVD±RW optical drive																																																																																																						
Network interfaces	Integrated one dedicated management port plus two GbE ports. One LOM slot for customized LOM with two RJ-45 or SFP+ ports, up to 10GbE. Optional ML2 or PCIe adapters are supported. ML2 adapter requires riser card with ML2 slot. Up to two ports supports Wake-on-LAN and NC-SI (see right)																																																																																																						
Security features	Power-on and admin password. Trusted Platform Module, TCG 1.2 compliant, upgrade to 2.0 via UEFI setting. Optional TCM in China only. Optional lockable security bezel																																																																																																						
Operating systems supported	Microsoft Windows Server 2016/2012 R2. Red Hat Enterprise Linux 7.3/6.9. SUSE Linux Enterprise Server 12 SP2/11 SP4. VMware ESXi 6.5/6.0 U3																																																																																																						
Systems management	XClarity Controller Standard, optional upgrades to Advanced or Enterprise are available. Energy Manager. XClarity Administrator. Lenovo Capacity Planner. Provisioning Manager. Essentials. Light Path Diagnostics																																																																																																						
GPU support	None																																																																																																						
Base warranty	MT 7X98: 1-year limited onsite service with 9x5/NBD MT 7X99: 3-year limited onsite service with 9x5/NBD																																																																																																						

Components	Specification												
Power supply	Up to two redundant hot-swap 550W and 750W 80 PLUS Platinum qualified AC power supplies. Or up to two redundant hot-swap 750W Titanium qualified AC power supplies. 750W Titanium is 200V - 240V, others are 100V - 240V												
Video	Integrated Matrox G200 in XClarity Controller												
Cooling	Three fans (2+1) for single processor model, four fans (3+1) for dual processor model												
Front ports	One XClarity Controller USB, one USB 3.0, one optional VGA												
Rear ports	One VGA, two USB 3.0, two ethernet (RJ-45), one XClarity Controller connector. Optional COM port												
Environmental specification	Supports ASHRAE A4 with limitations. <table> <tr> <td>Temperature - operating</td><td>A4: 5°C to 45°C (41°F to 113°F) A3: 5°C to 40°C (41°F to 104°F) A2: 10°C to 35°C (50°F to 95°F)</td></tr> <tr> <td>Temperature - non operating (no package)</td><td>-10°C to 60°C (14°F to 140°F)</td></tr> <tr> <td>Temperature - non operating (with package)</td><td>-40°C to 70°C (-40°F to 158°F)</td></tr> <tr> <td>Altitude - operating</td><td>(Unpressurized): 0-10000ft (0-3048m)</td></tr> <tr> <td>Humidity - operating, non-condensing</td><td>A4: 8%-90%. A3: 8%-85%. A2: 8%-80%</td></tr> <tr> <td>Humidity - storage (with package), non-condensing</td><td>8%-90%</td></tr> </table> Models should meet the following requirements to support A3 and A4: • Redundant power supplies required • No system fan fails • No NVMe drive • No rear two HS bays • Processor TDP is less than or equal to 140 watts, and no Intel Xeon 6140 or 6152 processor is installed • On 12x 3.5" models, no M.2 drives	Temperature - operating	A4: 5°C to 45°C (41°F to 113°F) A3: 5°C to 40°C (41°F to 104°F) A2: 10°C to 35°C (50°F to 95°F)	Temperature - non operating (no package)	-10°C to 60°C (14°F to 140°F)	Temperature - non operating (with package)	-40°C to 70°C (-40°F to 158°F)	Altitude - operating	(Unpressurized): 0-10000ft (0-3048m)	Humidity - operating, non-condensing	A4: 8%-90%. A3: 8%-85%. A2: 8%-80%	Humidity - storage (with package), non-condensing	8%-90%
Temperature - operating	A4: 5°C to 45°C (41°F to 113°F) A3: 5°C to 40°C (41°F to 104°F) A2: 10°C to 35°C (50°F to 95°F)												
Temperature - non operating (no package)	-10°C to 60°C (14°F to 140°F)												
Temperature - non operating (with package)	-40°C to 70°C (-40°F to 158°F)												
Altitude - operating	(Unpressurized): 0-10000ft (0-3048m)												
Humidity - operating, non-condensing	A4: 8%-90%. A3: 8%-85%. A2: 8%-80%												
Humidity - storage (with package), non-condensing	8%-90%												
Environmental certification	Energy Star Server 2.1 certified. More environmental information please see: www.lenovo.com/social_responsibility/us/en/environment/												

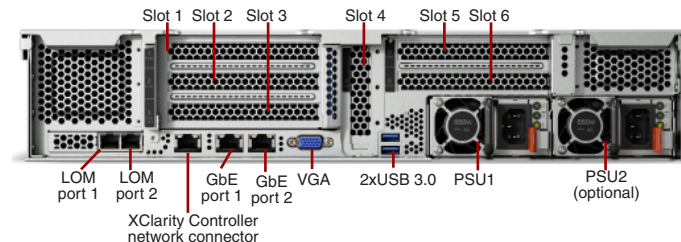

Note: GbE port 1 and LOM port 1 support Wake-on-LAN and NC-SI. Riser cards, expansion cards, and LOM adapters are optional.

Expansion slots

Slot 1-3 (riser card 1)	Supports one of the following for riser card 1: Option 1: PCIe 3.0 x8/x8/x8 (slot 1-3). Full height, half length. Option 2: PCIe 3.0 x16/x8 (slot 1 and 3). Full height, half length Option 3: PCIe 3.0 x8/x8/x8 ML2 (slot 1-3). Full height, half length Option 4: Two rear 3.5" disk bays, 12 x 3.5" models only
Slot 4 (onboard)	PCIe 3.0 x8, low profile
Slot 5 (riser card 2)	PCIe 3.0 x16, full height, half length, requires 2nd CPU
Slot 6 (riser card 2)	PCIe 3.0 x8, full height, half length

System unique options

7XH7A06253	ThinkSystem SR590/SR650 Rear HDD Kit
4XH7A08778	ThinkSystemSR550/SR650/SR650 x8/x8/ML2 PCIe FH Riser 1 Kit
4XH7A08779	ThinkSystem SR550/SR590/SR650 x16/x8 PCIe FH Riser 1 Kit
4XH7A08777	ThinkSystem SR550/SR590/SR650 x8/x8/x8 PCIe FH Riser 1 Kit
4XH7A08780	ThinkSystemSR550/SR590/SR650 x16/x8(or x16) PCIe FH Riser 2 Kit
7Z17A02578	ThinkSystem SR550/SR590/SR650 EIA Latch w/ VGA Upgrade Kit
7Z17A02580	ThinkSystem 2U Security Bezel
7Z17A02577	ThinkSystem COM Port Upgrade Kit
4XH7A08764	ThinkSystem SR590 2.5" Anybay 8-Bay Backplane Kit
4XH7A08763	ThinkSystem SR590 2.5" SATA/SAS 8-Bay Backplane Kit

ThinkSystem SR590

