



eW Cove MX Powercore

BCX416 10xLED-HB/3000 100-277V L1220 WB

3000 K - 125° x 120° - Wide beam - 1220 mm - White

With its superior light output, wide beam angle, and range of fixed colors and color temperatures, eW Cove MX Powercore can be used for accent lighting and indirect general illumination, as well as the full range of wall and ceiling cove applications. This fixture meets or exceeds the performance of comparable linear fluorescent strip cove lights while lowering installation, energy, and maintenance costs. eW Cove MX Powercore offers environmentally conscious buyers a green, energy-efficient lighting solution without sacrificing quality or quantity of light. Integrated Powercore technology ensures rapid, efficient and accurate control of power output to the fixture directly from line voltage, eliminating the need for external power supplies. Use of standard wiring dramatically simplifies installation and helps lower total system cost.

Product data

General Information	
Number of light sources	10 [10 pcs]
Lamp family code	LED-HB [LED High Brightness]
Light source colour	Warm white
Light source replaceable	No
Driver/power unit/transformer	PSR [Power supply unit regulating]
Driver included	Yes
Optic type	WB [Wide beam]
Optical cover/lens type	PC [Polycarbonate bowl/cover]
Luminaire light beam spread	125° x 120°
Protection class IEC	Safety class I (I)

Ready-to-install	Ready-to-install
Type description	No
CE mark	CE mark
UL mark	UL and cUL mark
CCC mark	CCC mark

Operating and Electrical	
Input voltage	100 to 277 V
Input frequency	50 to 60 Hz

eW Cove MX Powercore

Controls and Dimming

Dimmable	Yes
----------	-----

Mechanical and Housing

Housing material	Aluminum die-cast
Optic material	Polycarbonate
Optical cover/lens material	Polycarbonate
Length	1220 mm

Approval and Application

Ingress protection code	IP20 [Finger-protected]
-------------------------	--------------------------

Initial Performance (IEC Compliant)

Initial luminous flux	2517 lm
Initial LED luminaire efficacy	45.3 lm/W
Init. Corr. colour temperature	3000 K
Init. colour rendering index	83
Initial input power	50 W

Over Time Performance (IEC Compliant)

Lumen Maintenance 50% at 25°C Calculated	100000
Lumen Maintenance 50% at 25°C Reported	65000
Lumen Maintenance 50% at 50°C Calculated	100000
Lumen Maintenance 50% at 50°C Reported	65000

Lumen Maintenance 70% at 25°C Calculated 100000

Lumen Maintenance 70% at 25°C Reported 65000

Lumen Maintenance 70% at 50°C Calculated 100000

Lumen Maintenance 70% at 50°C Reported 65000

Application Conditions

Ambient temperature range	-20 to +50 °C
---------------------------	---------------

Maximum dimming level	10% (depends on dimmer, ELV)
-----------------------	------------------------------

Suitable for random switching	Yes (relates to presence/ movement detection and daylight harvesting)
-------------------------------	-----------------------------------------------------------------------

Product Data

Full product code	871829137858799
-------------------	-----------------

Order product name	BCX416 10xLED-HB/3000 100-277V L1220 WB
--------------------	-----------------------------------------

EAN/UPC – product	8718291378587
-------------------	---------------

Order code	37858799
------------	----------


Numerator – quantity per pack	1
-------------------------------	---

Numerator – packs per outer box	6
---------------------------------	---

Material no. (12NC)	910503702611
---------------------	--------------

Net weight (piece)	1.800 kg
--------------------	----------

Dimensional drawing

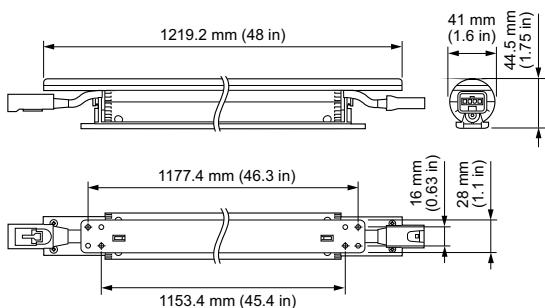

Cove

