



CoreLine Trunking

LL121X LED80S/840 1x PSU WB 7 EL3 WH

CoreLine Trunking - 3 pcs - LED Module, system flux 8000 lm -
 Power supply unit - Wide beam - - - 7 conductors - Emergency
 lighting 3 hours duration - Feed-through wiring 5-phase -
 Ceiling-mounting bracket - White - - - -

Whether for a new facility or renovation of an existing space, customers want lighting solutions that provide quality of light and substantial energy and maintenance savings. The new CoreLine Trunking range of LED products can be used to replace general lighting. The process of selecting, installing and maintaining is so easy – it's a simple switch.

Product data

General Information		Connection	C-2A [Connector with 2 additional wires for addressable emergency lighting]
Number of light sources	3 [3 pcs]	Cable	-
Lamp family code	LED80S [LED Module, system flux 8000 lm]	Protection class IEC	Safety class I (I)
Beam angle of light source	120 °	Mounting	SMB [Ceiling-mounting bracket]
Light source colour	840 neutral white	Ready-to-install	-
Light source replaceable	No	Glow-wire test	850/5 [Temperature 850 °C, duration 5 s]
Number of gear units	1 unit	Flammability mark	F [For mounting on normally flammable surfaces]
Driver/power unit/transformer	PSU [Power supply unit]	Accessories included	MB-SW [Mounting bracket for suspension wire]
Driver included	Yes	CE mark	CE mark
Optic type	WB [Wide beam]	ENEC mark	ENEC mark
Optical cover/lens type	No [-]	Mechanical accessories	No [-]
Luminaire light beam spread	100° x 94°	Remarks	*-Per Lighting Europe guidance paper "Evaluating performance of LED based
Emergency lighting	EL3 [Emergency lighting 3 hours duration]		
Control interface	-		
Internal wiring	Standard		
Feed-through wiring	Feed-through wiring 5-phase		


CoreLine Trunking

luminaires - January 2018": statistically there is no relevant difference in lumen maintenance between B50 and for example B10. Therefore the median useful life (B50) value also represents the B10 value.	
Constant light output	No
Number of products on MCB	24
RoHS mark	RoHS mark
Product Family Code	LL121X [CoreLine Trunking]
Light Technical	
Light distribution	DIR [Direct lighting]
Operating and Electrical	
Input voltage	220 to 240 V
Input frequency	50 to 60 Hz
Control signal voltage	0-16 V DC DALI
Circuit	No [-]
Circuit option	7 [7 conductors]
Initial CLO power consumption	- W
Average CLO power consumption	- W
Inrush current	19 A
Inrush time	0.28 ms
Power factor (min.)	0.97
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Housing material	Steel
Reflector material	-
Optic material	Acrylate
Optical cover/lens material	Acrylate
Fixation material	Steel
Optical cover/lens finish	Frosted
Overall length	1730 mm
Overall width	95 mm
Overall height	52 mm
Height	52 mm
Diameter	-

Approval and Application	
Ingress protection code	IP20 [Finger-protected]
Mech. impact protection code	IK02 [0.2 J standard]
Initial Performance (IEC Compliant)	
Initial luminous flux	8000 lm
Luminous flux tolerance	+/-1%
Initial LED luminaire efficacy	143 lm/W
Init. Corr. colour temperature	4000 K
Init. colour rendering index	≥80
Initial chromaticity	(0.38, 0.38) SDCM <3
Initial input power	56 W
Power consumption tolerance	+/-10%
Over Time Performance (IEC Compliant)	
Control gear failure rate at median	5 %
useful life 50000 h	
Lumen maintenance at median useful life* 50000 h	L80
Application Conditions	
Ambient temperature range	-20 to +35 °C
Performance ambient temperature Tq	25 °C
Maximum dimming level	Not applicable
Suitable for random switching	No
Product Data	
Full product code	871869638123600
Order product name	LL121X LED80S/840 1x PSU WB 7 EL3 WH
EAN/UPC – product	8718696381236
Order code	38123600
Numerator – quantity per pack	1
Numerator – packs per outer box	1
Material no. (12NC)	910925864003
Net weight (piece)	4.360 kg



CoreLine Trunking

Dimensional drawing

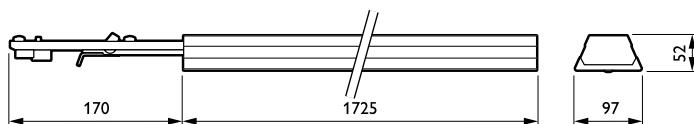

CoreLine electr. units LL120X-LL122X

Photometric data

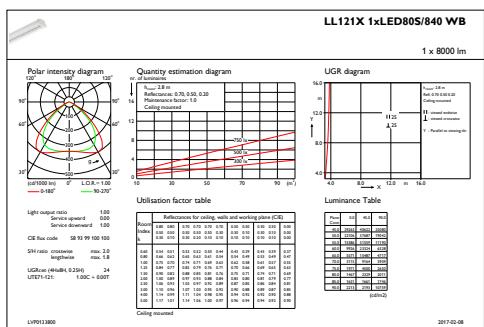

IFGU1 LL121X1xLED80S840WB

